

R03: N788BM

UTC audio ridge and N788BM-track-EGM96.kml


V constant H constant; analyzed; audio data with Method I and Method II fitted curves

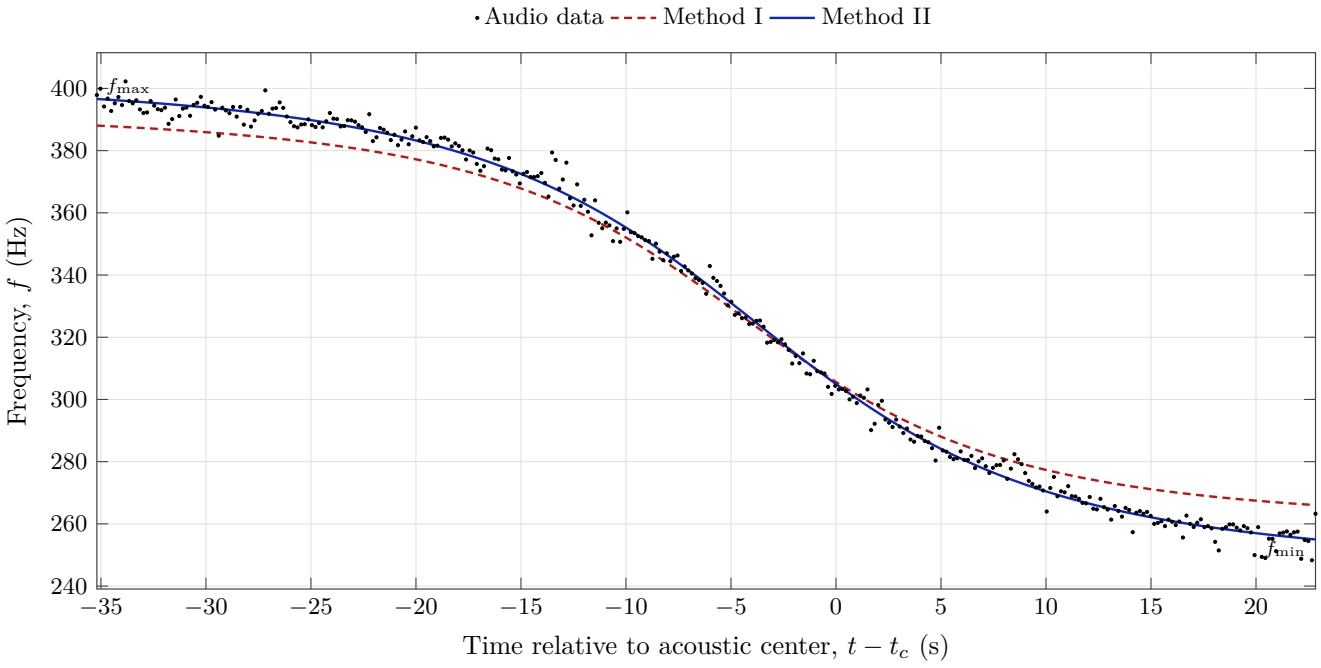

ADS-B speed and height

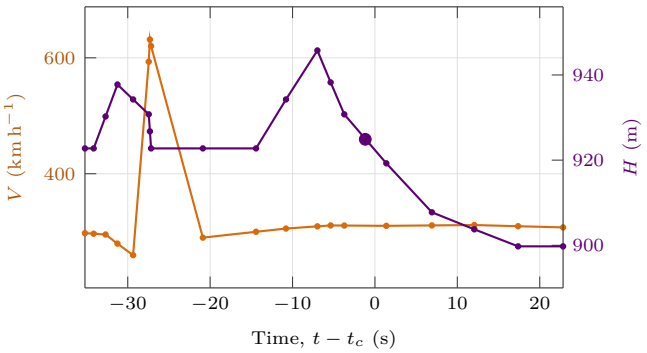

Ground track

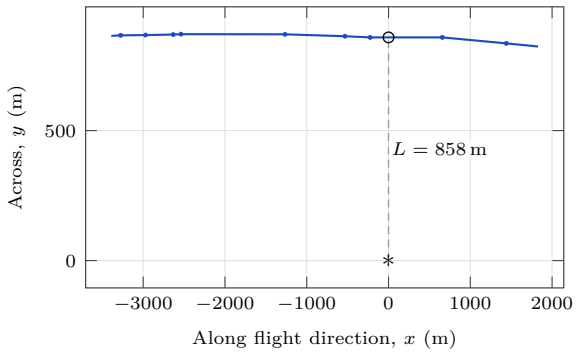

Reference / method	V (km h^{-1})	$R_{\min}$ (m)	L (m)	H (m)
ADS-B	305.39	1261.87	858.43	924.88
Method I	252.92 ± 1.444	976.52 ± 35.387	858.43	465.50 ± 74.233
Method II	300.72 ± 2.322	1285.24 ± 31.398	858.43	956.52 ± 42.188

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 393.799$ Hz (first 51 points) and $f_{min} = 258.926$ Hz (last 51 points).