

R22: N916KT

UTC audio ridge and N916KT-track-EGM96.kml


V constant H constant; analyzed; audio data with Method I and Method II fitted curves

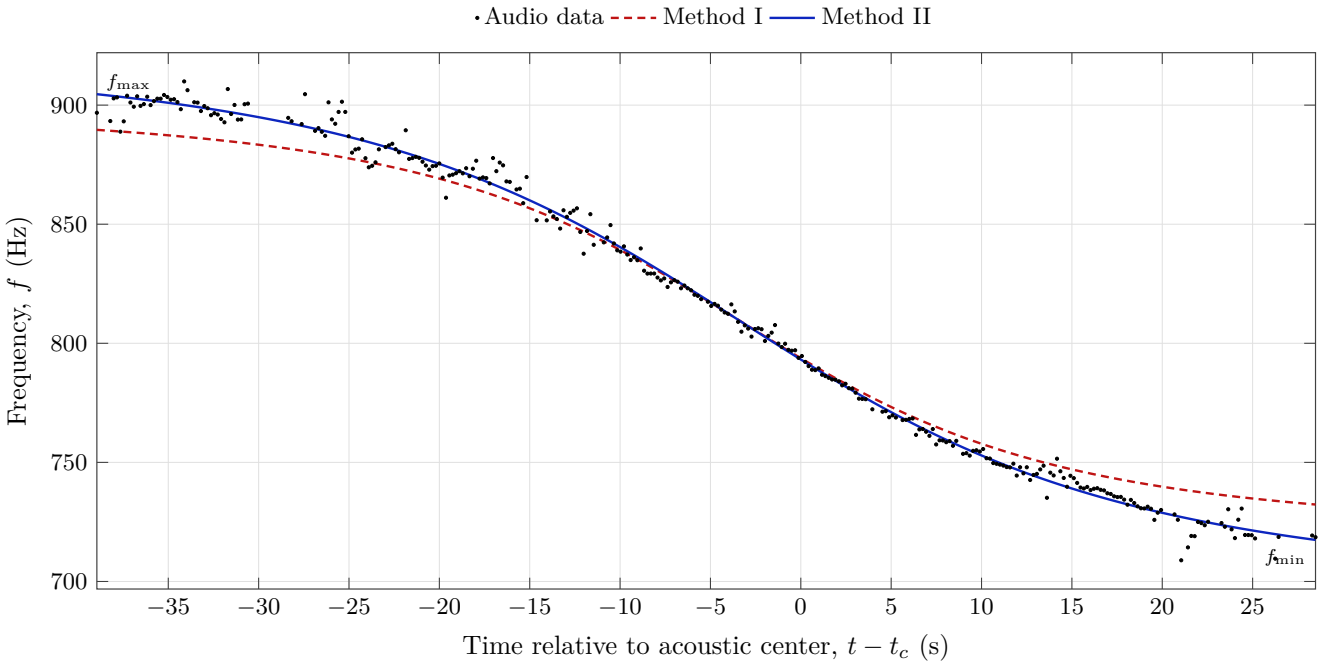

ADS-B speed and height

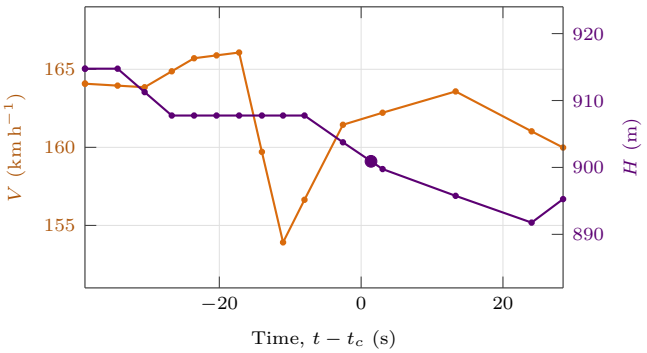

Ground track

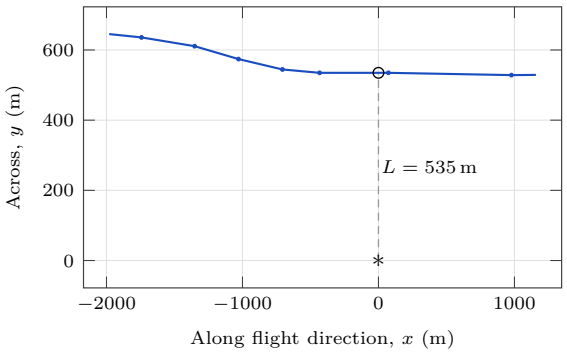

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	163.58	1047.73	534.88	900.91
Method I	136.71 ± 1.384	729.94 ± 19.681	534.88	496.71 ± 28.922
Method II	172.67 ± 2.349	1138.46 ± 42.039	534.88	1004.99 ± 47.622

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 900.426$ Hz (first 15 points) and $f_{min} = 719.501$ Hz (last 15 points).