

R35: N172EL

UTC audio ridge and N172EL-track-EGM96.kml


V constant H varying; analyzed; audio data with Method I and Method II fitted curves

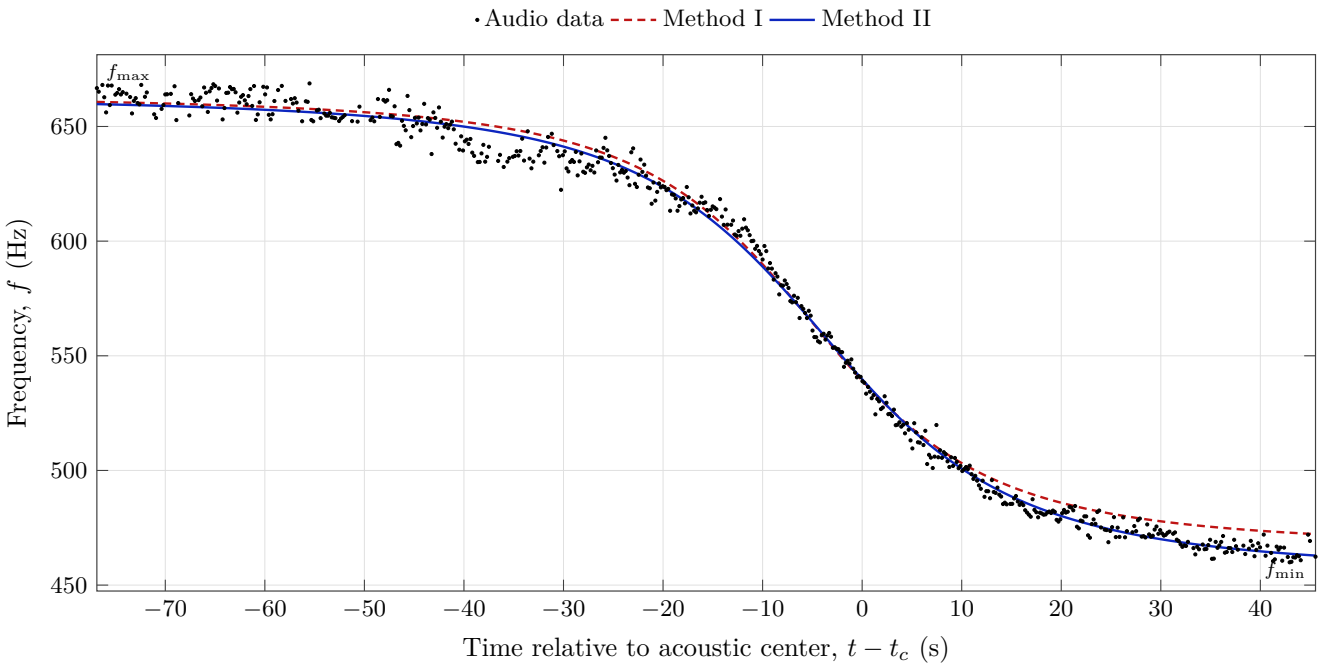

ADS-B speed and height

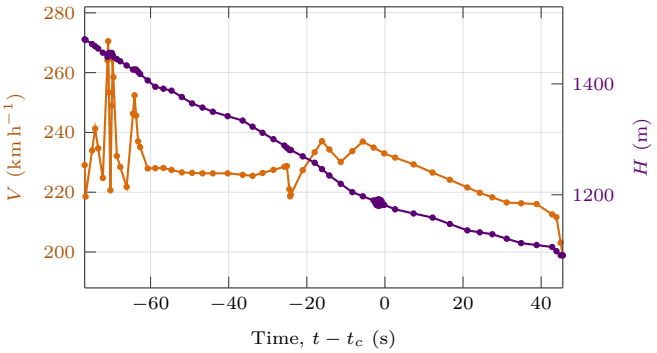

Ground track

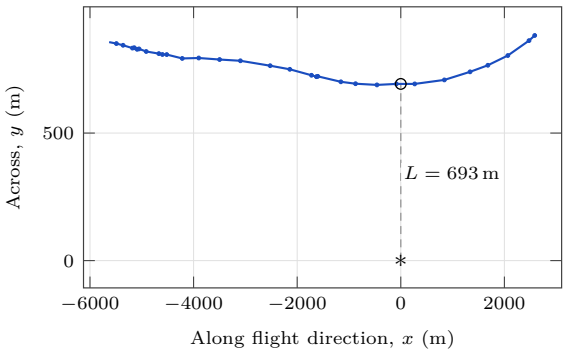

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	226.62	1373.34	692.66	1185.87
Method I	214.45 ± 0.718	1142.99 ± 31.380	692.66	909.20 ± 39.449
Method II	228.51 ± 1.224	1330.31 ± 25.474	692.66	1135.76 ± 29.838

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 663.966$ Hz (first 58 points) and $f_{min} = 465.994$ Hz (last 58 points).