

R14: N248LF

UTC audio ridge and N248LF-track-EGM96.kml


V constant H varying; analyzed; audio data with Method I and Method II fitted curves

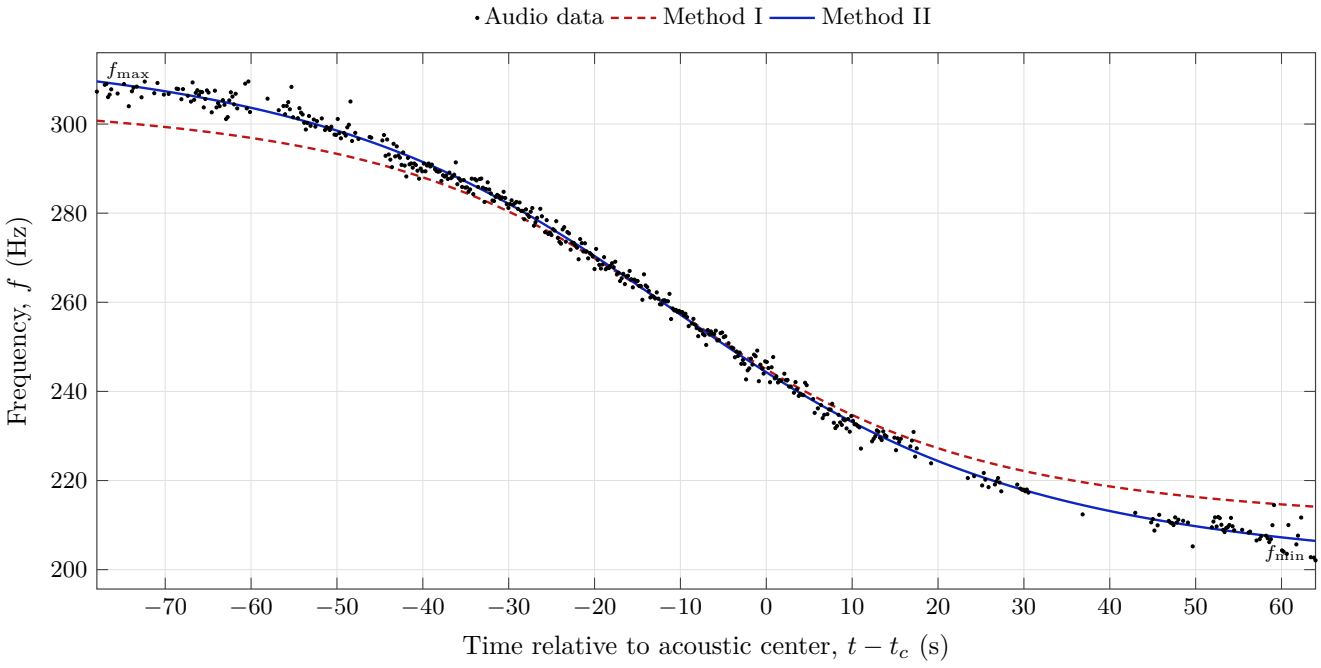

ADS-B speed and height

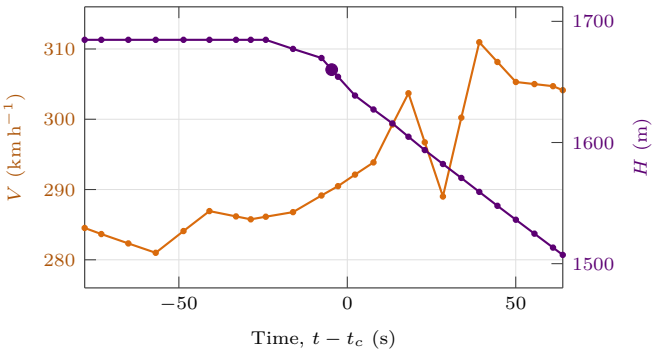

Ground track

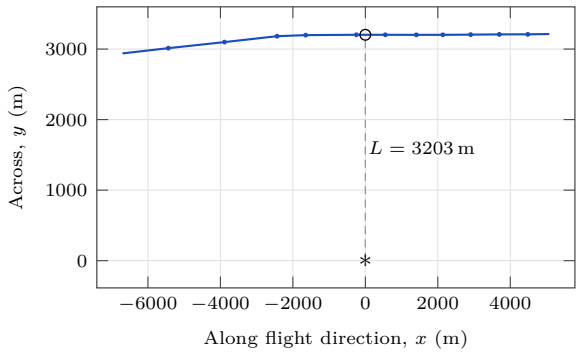

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	286.93	3607.37	3202.63	1660.20
Method I	233.58 ± 1.421	2525.63 ± 57.516	3202.63	–
Method II	290.95 ± 2.038	3834.94 ± 76.015	3202.63	2109.48 ± 138.192

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 307.118$ Hz (first 38 points) and $f_{min} = 208.685$ Hz (last 38 points).