

R23: N310MG

UTC audio ridge and N310MG-track-EGM96.kml


V constant H varying; analyzed; audio data with Method I and Method II fitted curves

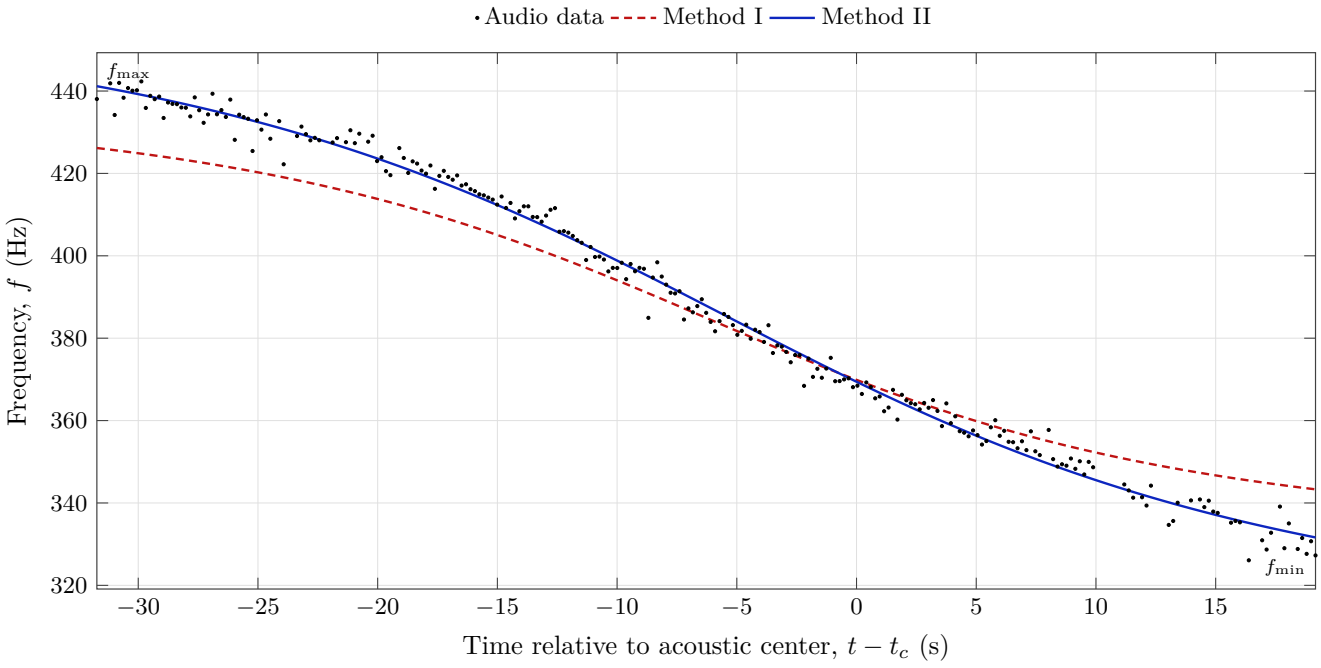

ADS-B speed and height

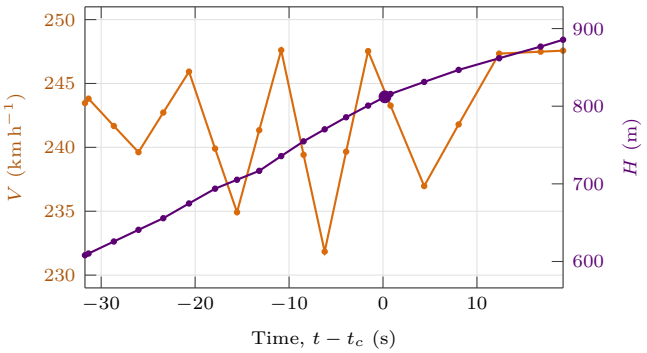

Ground track

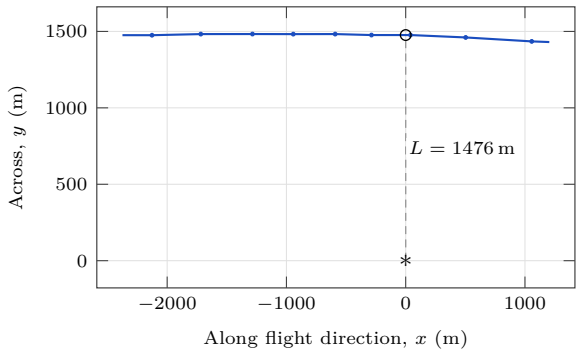

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	243.81	1684.92	1476.28	812.12
Method I	174.38 ± 2.157	1078.20 ± 49.245	1476.28	–
Method II	250.13 ± 7.068	1866.49 ± 128.995	1476.28	1142.10 ± 210.813

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 439.461$ Hz (first 12 points) and $f_{min} = 329.861$ Hz (last 12 points).