

R05: N413AK

UTC audio ridge and N413AK-track-EGM96.kml


V constant H varying; analyzed; audio data with Method I and Method II fitted curves

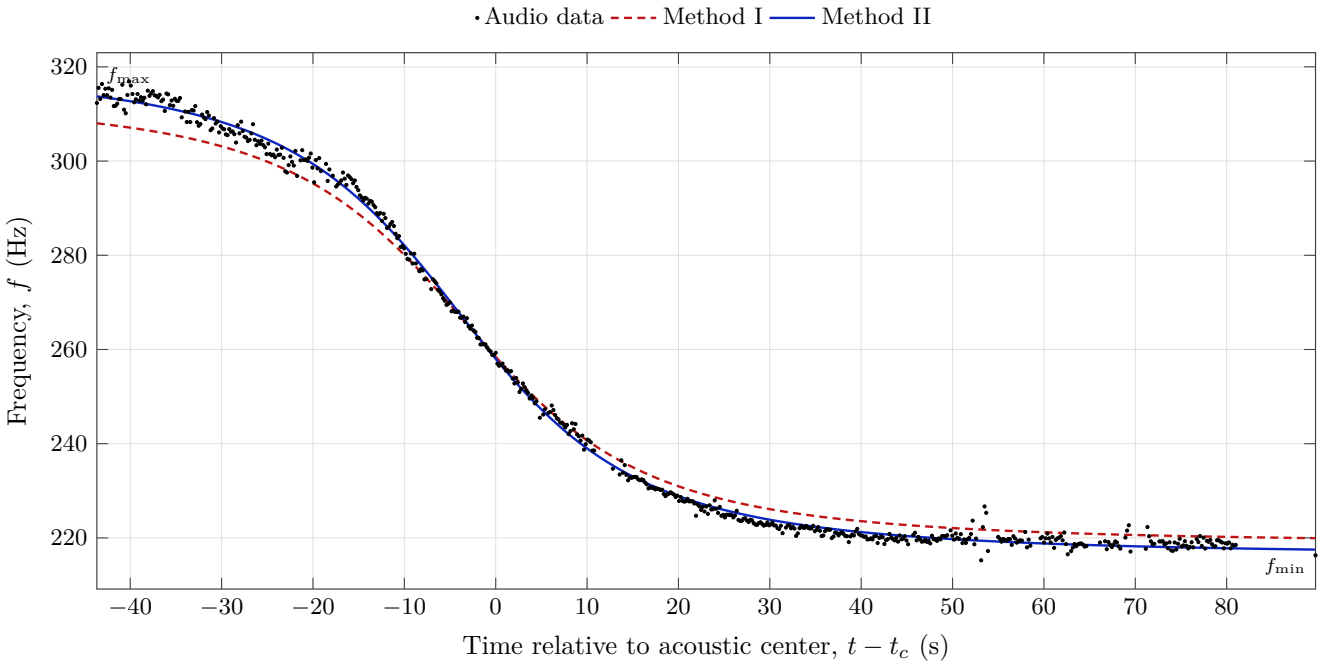

ADS-B speed and height

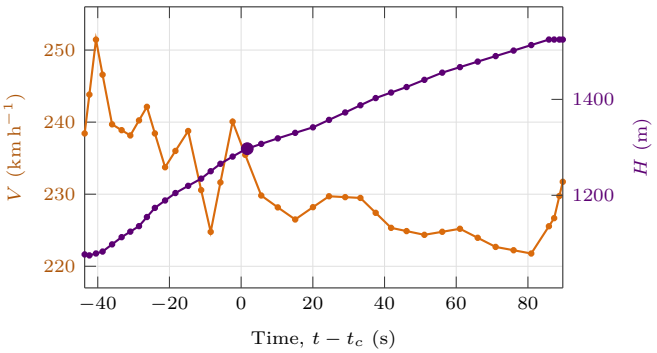

Ground track

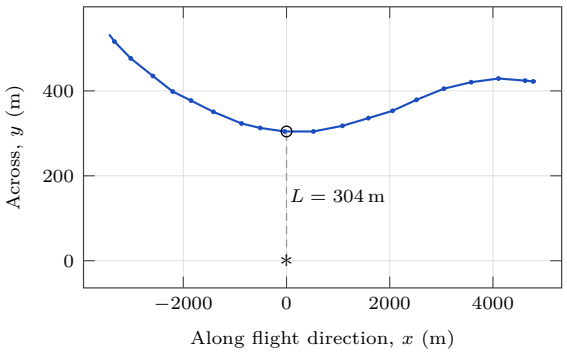

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	229.48	1332.48	304.41	1297.25
Method I	217.84 ± 0.502	1303.03 ± 21.149	304.41	1266.98 ± 21.751
Method II	236.07 ± 0.712	1390.45 ± 16.058	304.41	1356.72 ± 16.457

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 313.490$ Hz (first 49 points) and $f_{min} = 218.764$ Hz (last 49 points).