

R17: N500MG

UTC audio ridge and N500MG-track-EGM96.kml


V constant H varying; analyzed; audio data with Method I and Method II fitted curves

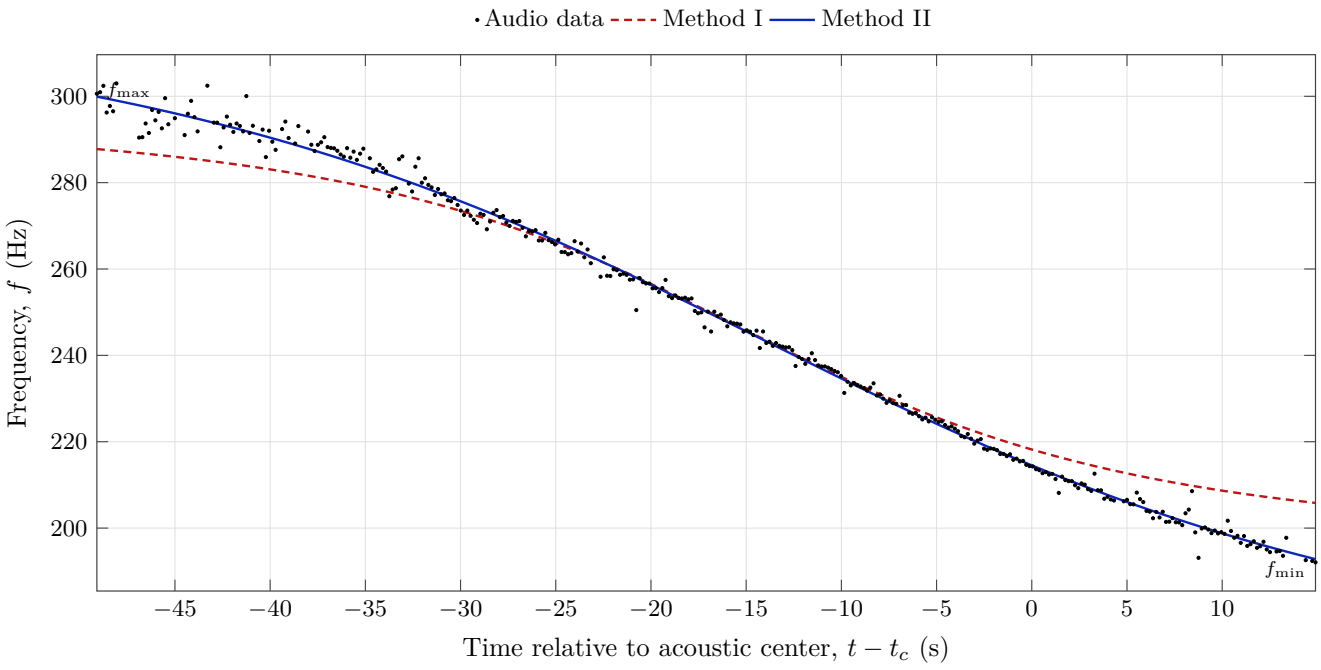

ADS-B speed and height

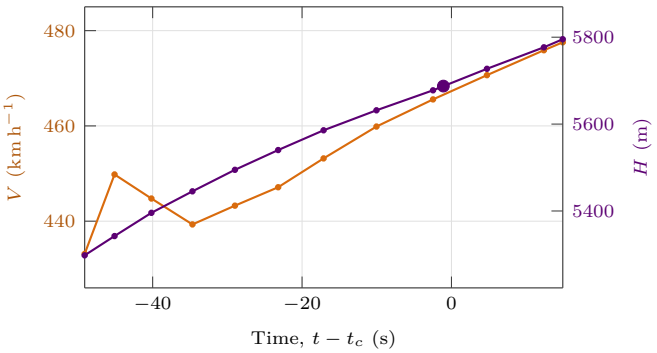

Ground track

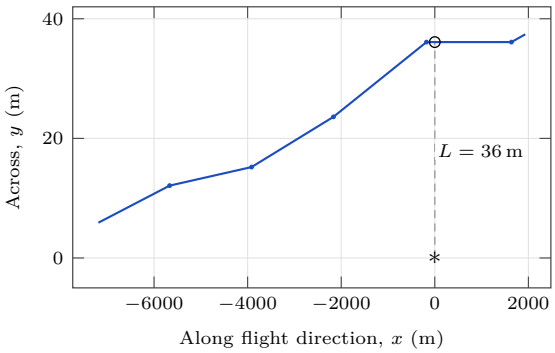

Reference / method	V (km h^{-1})	$R_{\min}$ (m)	L (m)	H (m)
ADS-B	449.81	5687.48	36.05	5687.37
Method I	251.25 ± 2.340	1635.25 ± 41.224	36.05	1634.85 ± 41.234
Method II	420.60 ± 10.370	4742.19 ± 279.985	36.05	4742.05 ± 279.993

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 296.387$ Hz (first 17 points) and $f_{min} = 195.432$ Hz (last 17 points).