

R21: N563FX

UTC audio ridge and N563FX-track-EGM96.kml


V constant H varying; analyzed; audio data with Method I and Method II fitted curves

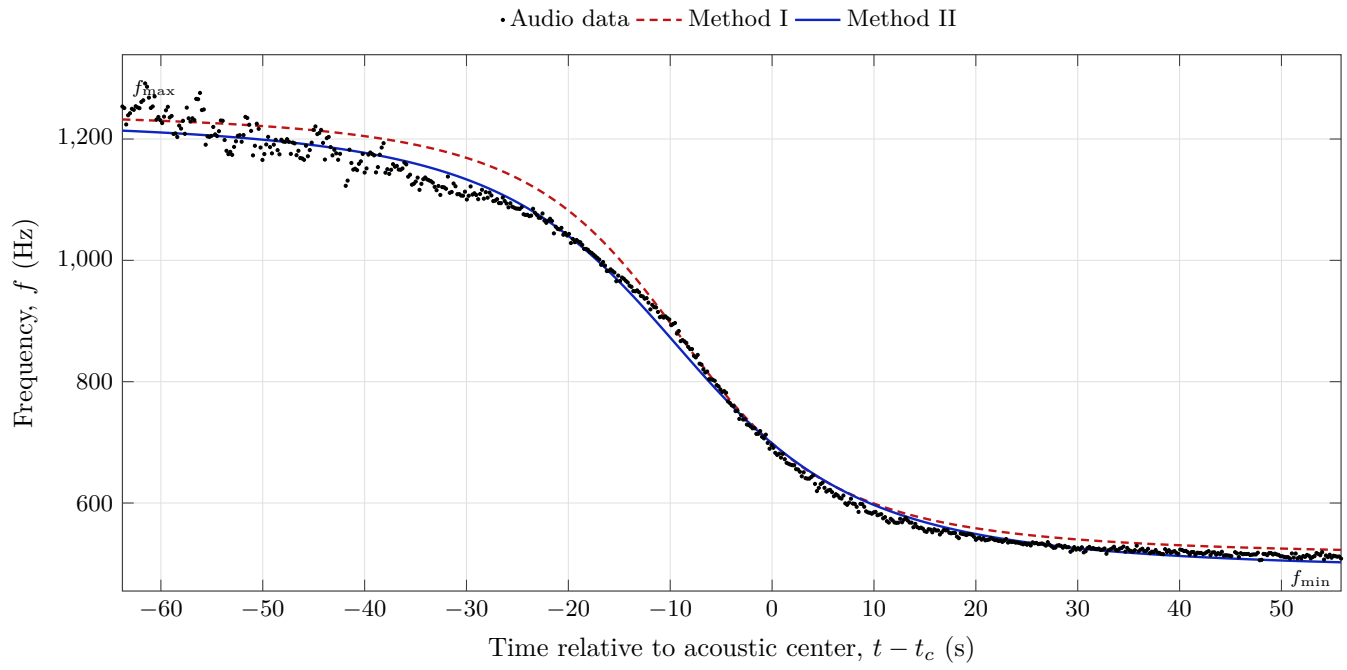

ADS-B speed and height

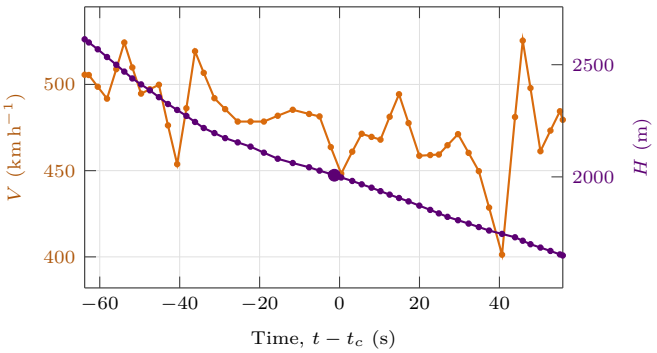

Ground track

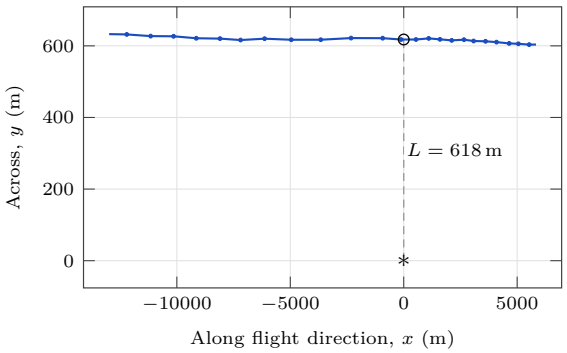

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	481.46	2100.23	617.65	2007.36
Method I	512.04 ± 1.563	2556.73 ± 45.175	617.65	2481.01 ± 46.554
Method II	532.34 ± 2.133	3196.30 ± 53.782	617.65	3136.06 ± 54.815

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \leq L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 1247.720$ Hz (first 32 points) and $f_{min} = 511.692$ Hz (last 32 points).