

R18: N621KS

UTC audio ridge and N621KS-track-EGM96.kml


V constant H varying; analyzed; audio data with Method I and Method II fitted curves

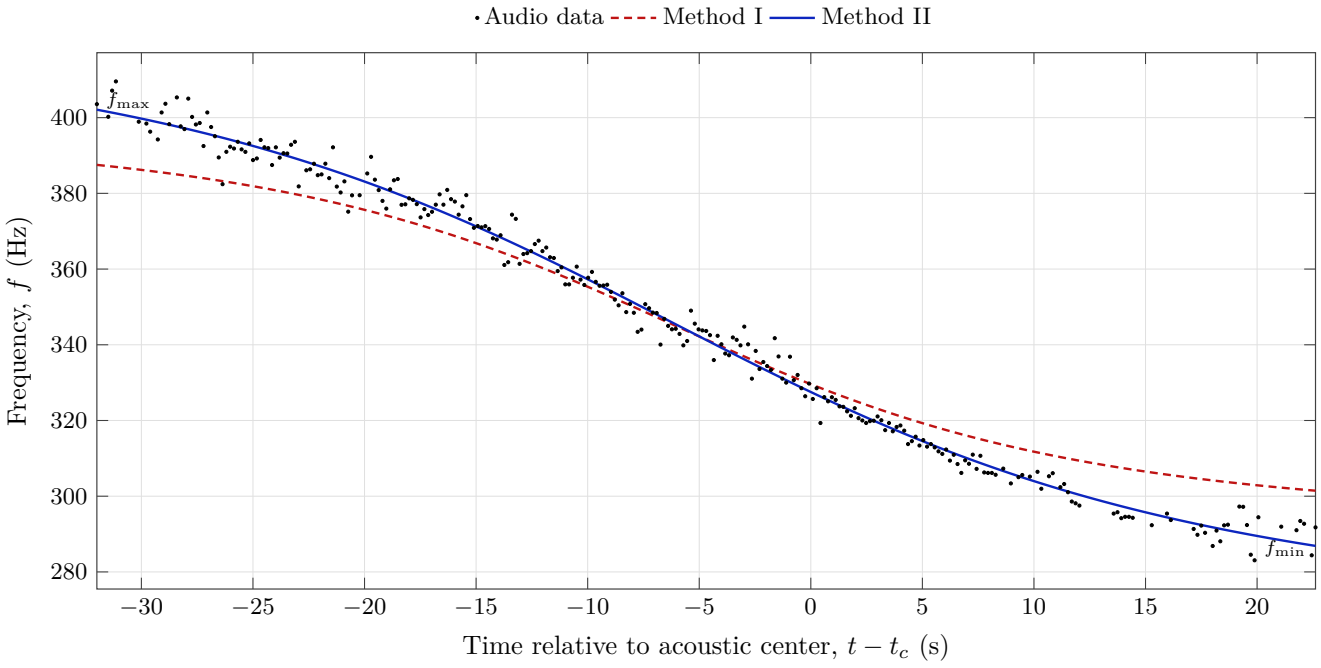

ADS-B speed and height

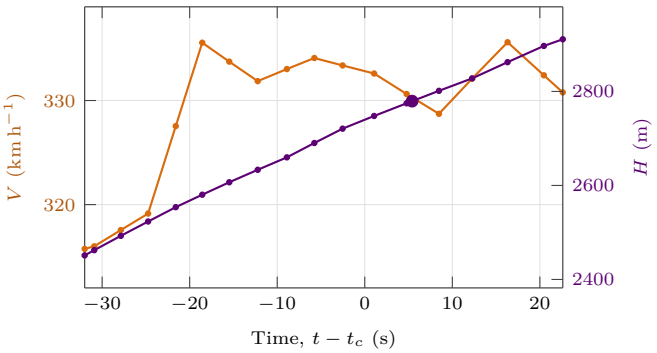

Ground track

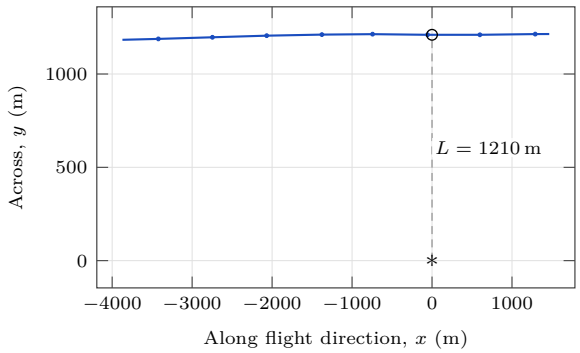

Reference / method	V (km h^{-1})	$R_{\min}$ (m)	L (m)	H (m)
ADS-B	331.86	3031.15	1210.14	2779.11
Method I	189.45 ± 2.124	1068.22 ± 58.173	1210.14	–
Method II	283.68 ± 8.224	2137.37 ± 155.475	1210.14	1761.79 ± 188.619

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 398.755$ Hz (first 22 points) and $f_{min} = 291.862$ Hz (last 22 points).