

R59: N67WL

UTC audio ridge and N67WL-track-EGM96.kml


V constant H varying; analyzed; audio data with Method I and Method II fitted curves

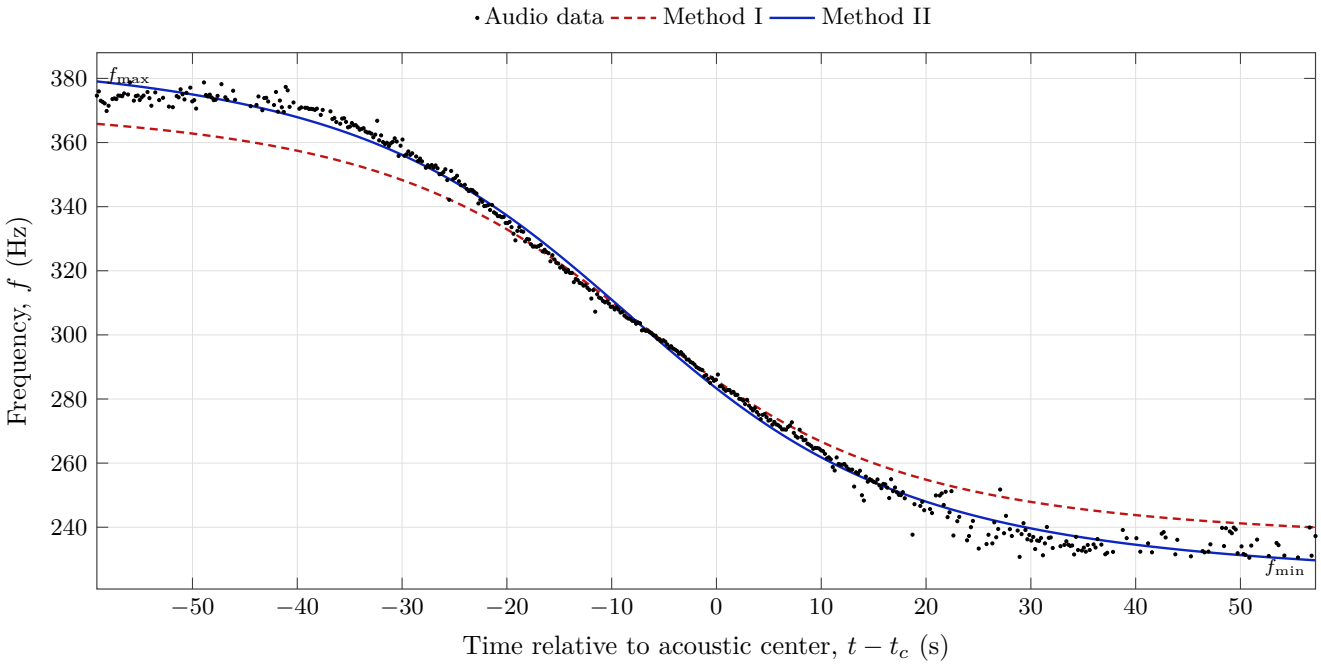

ADS-B speed and height

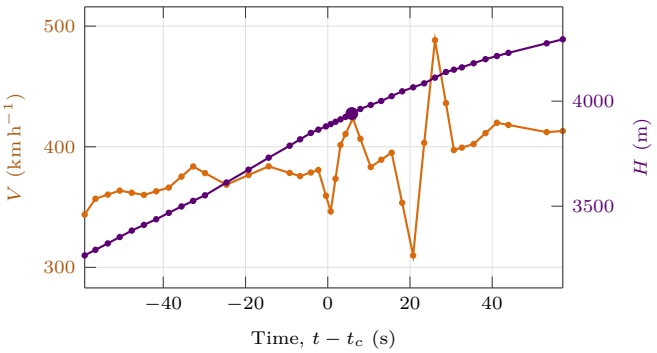

Ground track

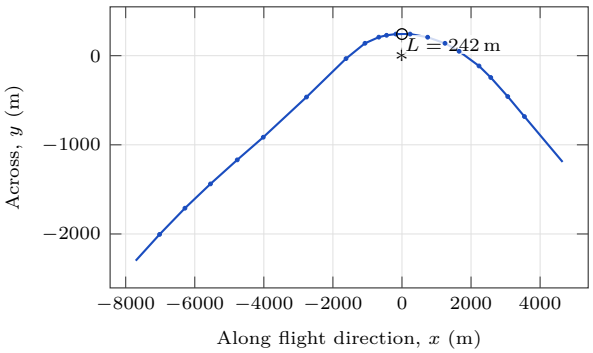

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	383.20	3948.47	242.25	3941.04
Method I	281.12 ± 1.129	2213.95 ± 25.452	242.25	2200.66 ± 25.606
Method II	335.69 ± 2.321	2849.57 ± 61.313	242.25	2839.25 ± 61.536

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 374.094$ Hz (first 48 points) and $f_{min} = 234.351$ Hz (last 48 points).