

R46: N759NC

UTC audio ridge and N759NC-track-EGM96.kml


V constant H varying; analyzed; audio data with Method I and Method II fitted curves

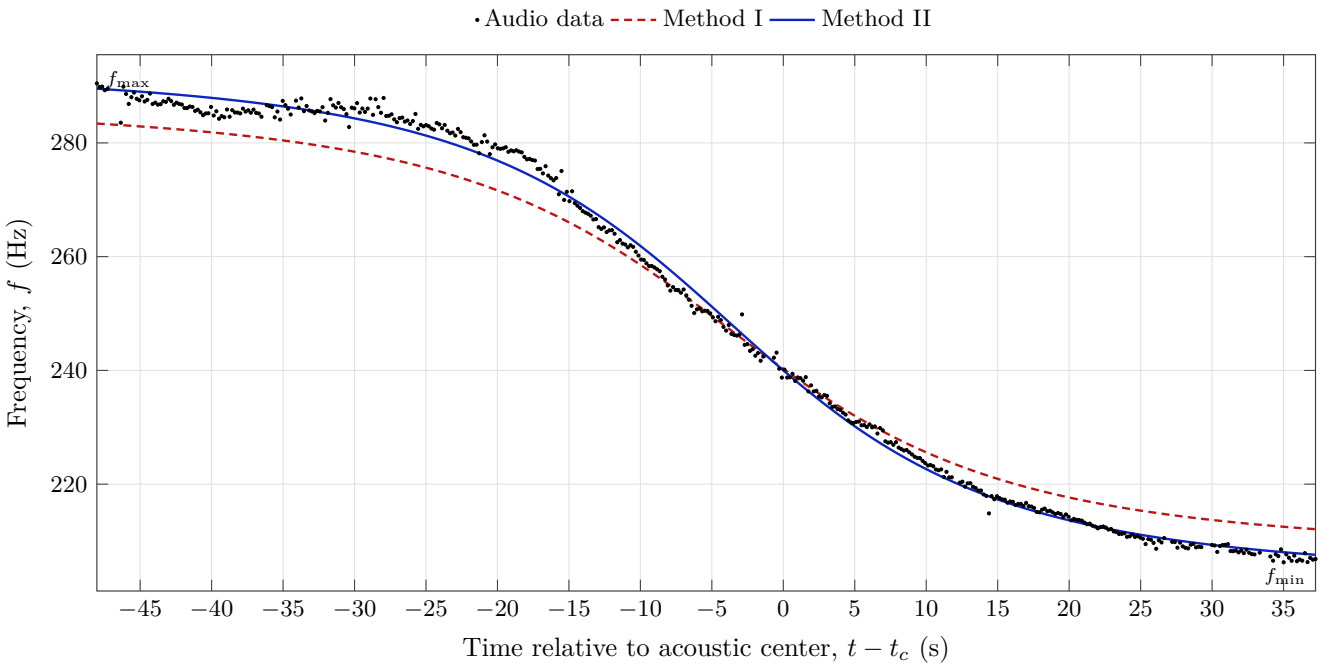

ADS-B speed and height

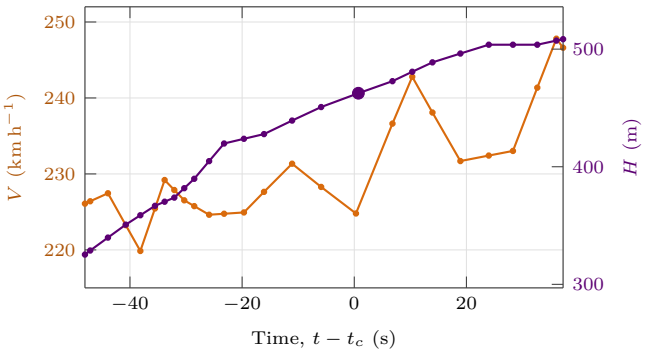

Ground track

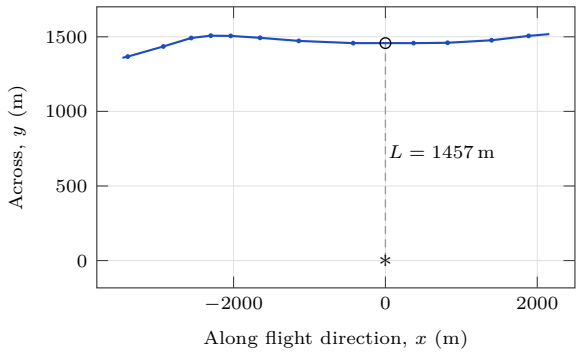

Reference / method	V (km h^{-1})	$R_{\min}$ (m)	L (m)	H (m)
ADS-B	227.46	1529.10	1457.48	462.51
Method I	196.79 ± 0.675	1167.63 ± 24.815	1457.48	–
Method II	223.11 ± 1.321	1257.45 ± 24.536	1457.48	–

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 287.283$ Hz (first 35 points) and $f_{min} = 207.702$ Hz (last 35 points).