

R60: N7PG

UTC audio ridge and N7PG-track-EGM96.kml


V constant H varying; analyzed; audio data with Method I and Method II fitted curves

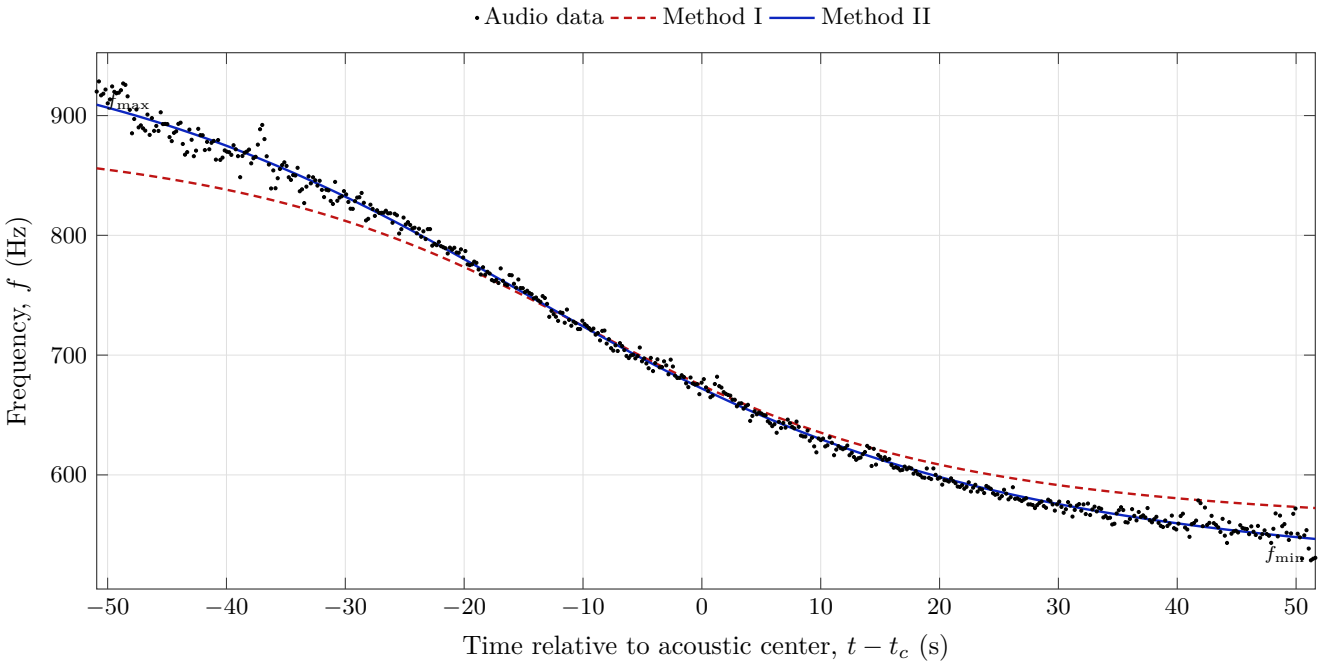

ADS-B speed and height

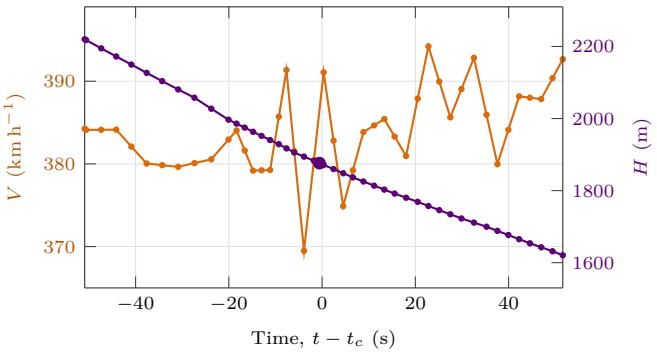

Ground track

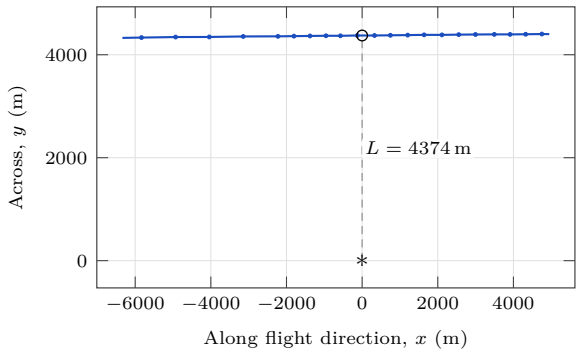

Reference / method	V (km h^{-1})	$R_{\min}$ (m)	L (m)	H (m)
ADS-B	383.85	4759.36	4373.96	1876.14
Method I	289.39 ± 2.229	2737.24 ± 58.250	4373.96	–
Method II	400.84 ± 4.015	5147.00 ± 141.949	4373.96	2712.94 ± 269.306

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{\max} = 893.563$ Hz (first 44 points) and $f_{\min} = 551.833$ Hz (last 44 points).