

R30: N7RR

UTC audio ridge and N7RR-track-EGM96.kml


V constant H varying; analyzed; audio data with Method I and Method II fitted curves

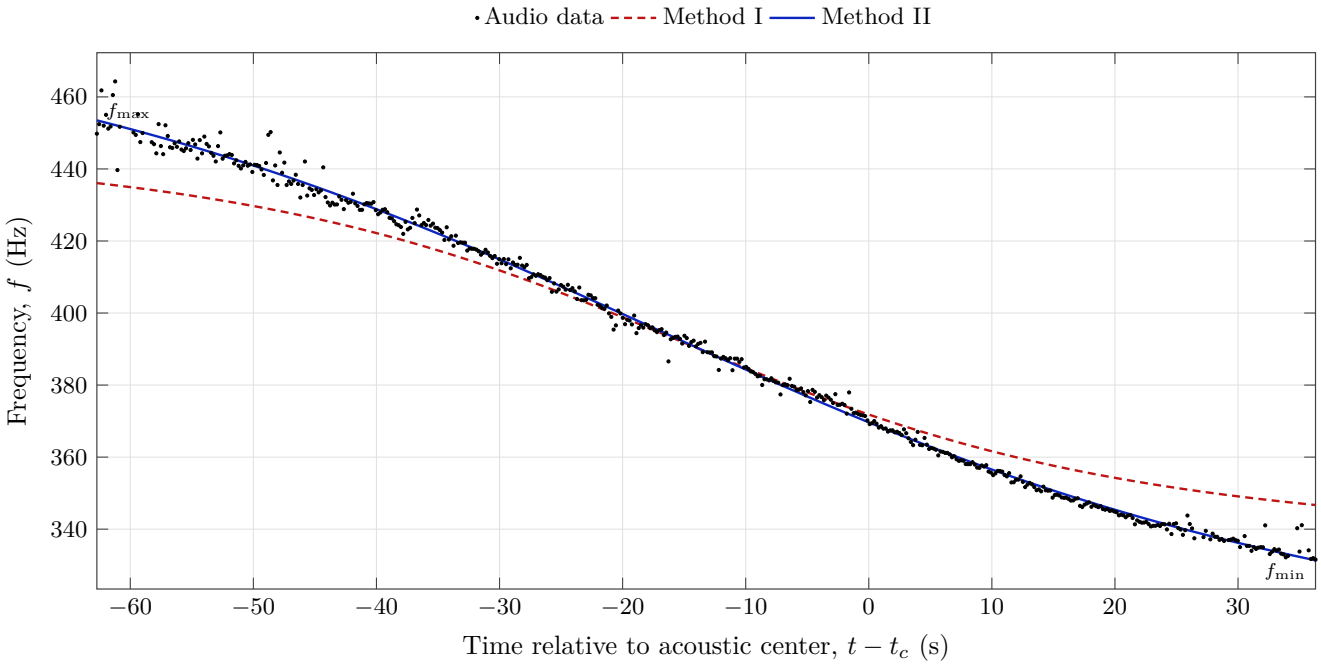

ADS-B speed and height

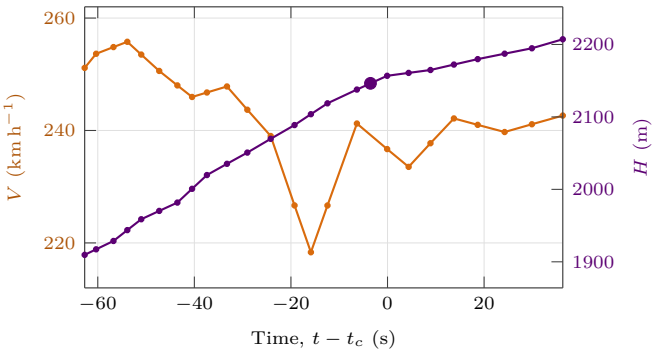

Ground track

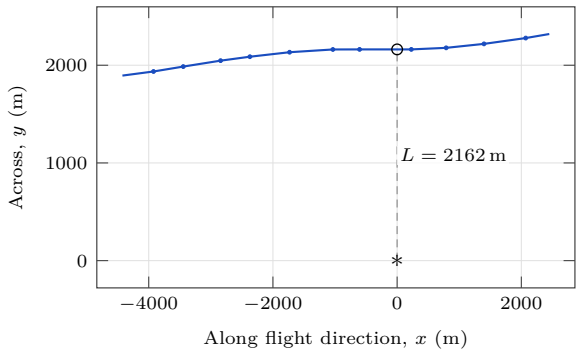

Reference / method	V (km h^{-1})	$R_{\min}$ (m)	L (m)	H (m)
ADS-B	242.15	3046.53	2162.11	2146.30
Method I	180.76 ± 1.715	2068.73 ± 50.260	2162.11	–
Method II	314.22 ± 6.243	5921.34 ± 278.995	2162.11	5512.49 ± 299.687

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{\max} = 450.050$ Hz (first 26 points) and $f_{\min} = 334.231$ Hz (last 26 points).