

R01: N86LP

UTC audio ridge and N86LP-track-EGM96.kml


V constant H varying; analyzed; audio data with Method I and Method II fitted curves

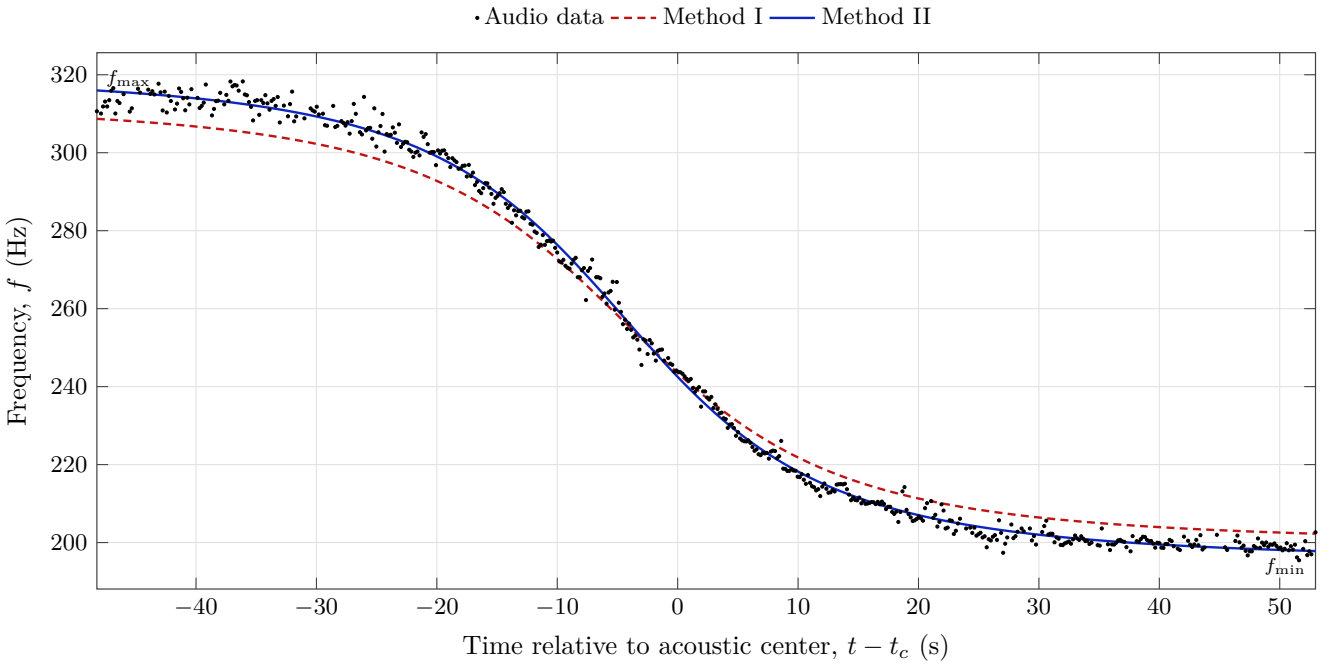

ADS-B speed and height

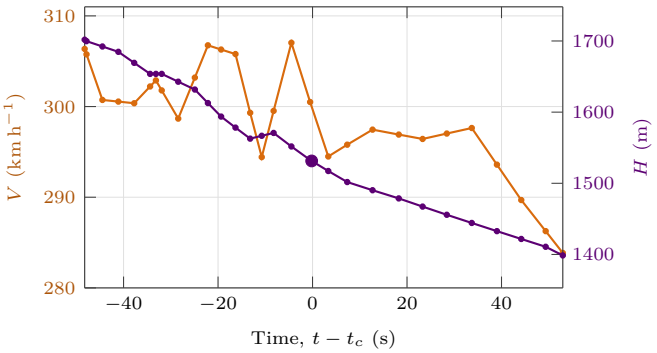

Ground track

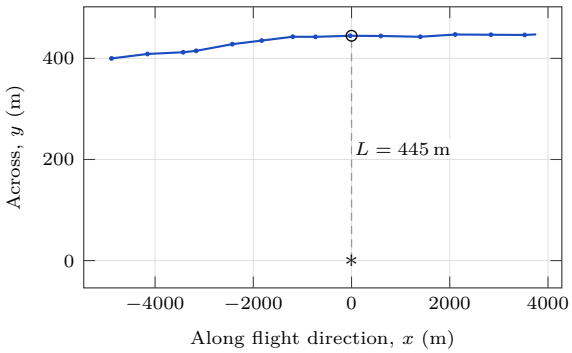

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	298.67	1594.63	444.65	1531.38
Method I	271.79 ± 0.692	1456.42 ± 40.369	444.65	1386.89 ± 42.393
Method II	298.23 ± 1.101	1523.36 ± 21.328	444.65	1457.02 ± 22.300

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 313.293$ Hz (first 80 points) and $f_{min} = 199.439$ Hz (last 80 points).