

# R15: N913TC

UTC audio ridge and N913TC-track-EGM96.kml


V constant H varying; analyzed; audio data with Method I and Method II fitted curves

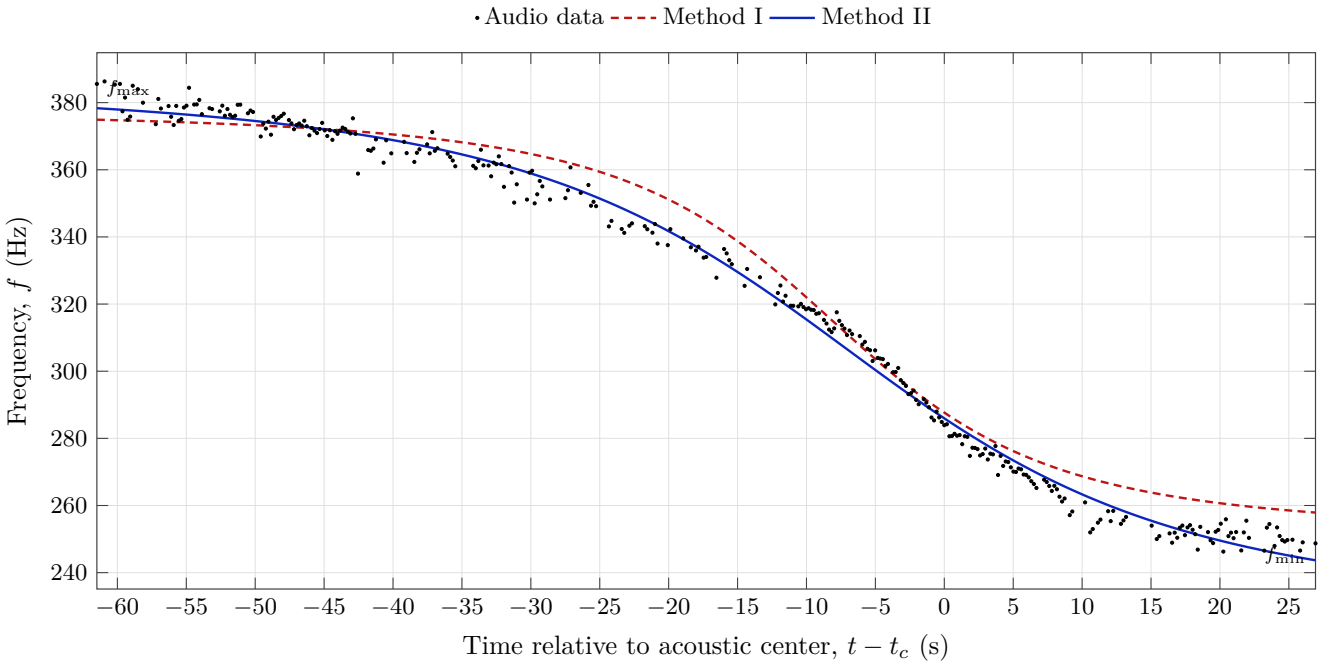


**ADS-B speed and height**

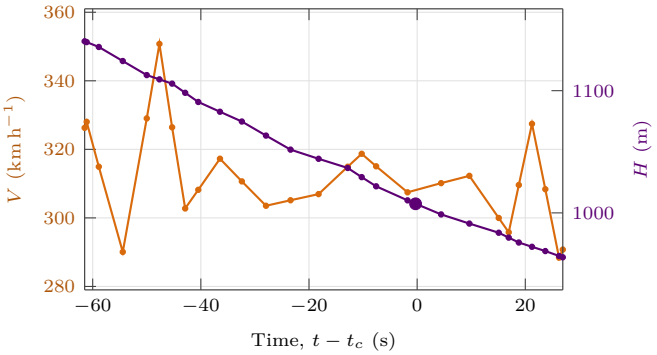


**Ground track**

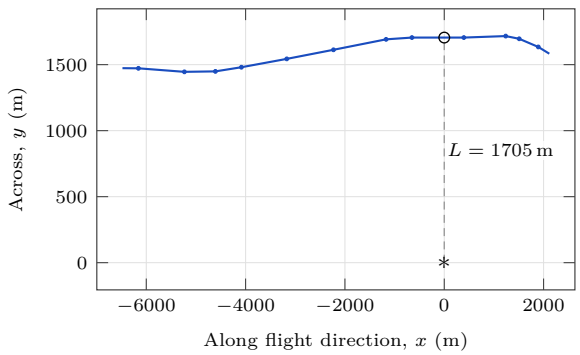


| Reference / method | $V$ (km h$^{-1}$) | $R_{\min}$ (m) | $L$ (m) | $H$ (m) |
|---|---|---|---|---|
| ADS-B | 307.47 | 1980.50 | 1705.12 | 1007.46 |
| Method I | 245.59 ± 1.255 | 1180.52 ± 33.820 | 1705.12 | – |
| Method II | 317.94 ± 4.691 | 2410.51 ± 99.504 | 1705.12 | 1703.85 ± 140.772 |

$L$ is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 377.870$ Hz (first 48 points) and $f_{min} = 251.575$ Hz (last 48 points).