

R50: N958JX

UTC audio ridge and N958JX-track-EGM96.kml


V constant H varying; analyzed; audio data with Method I and Method II fitted curves

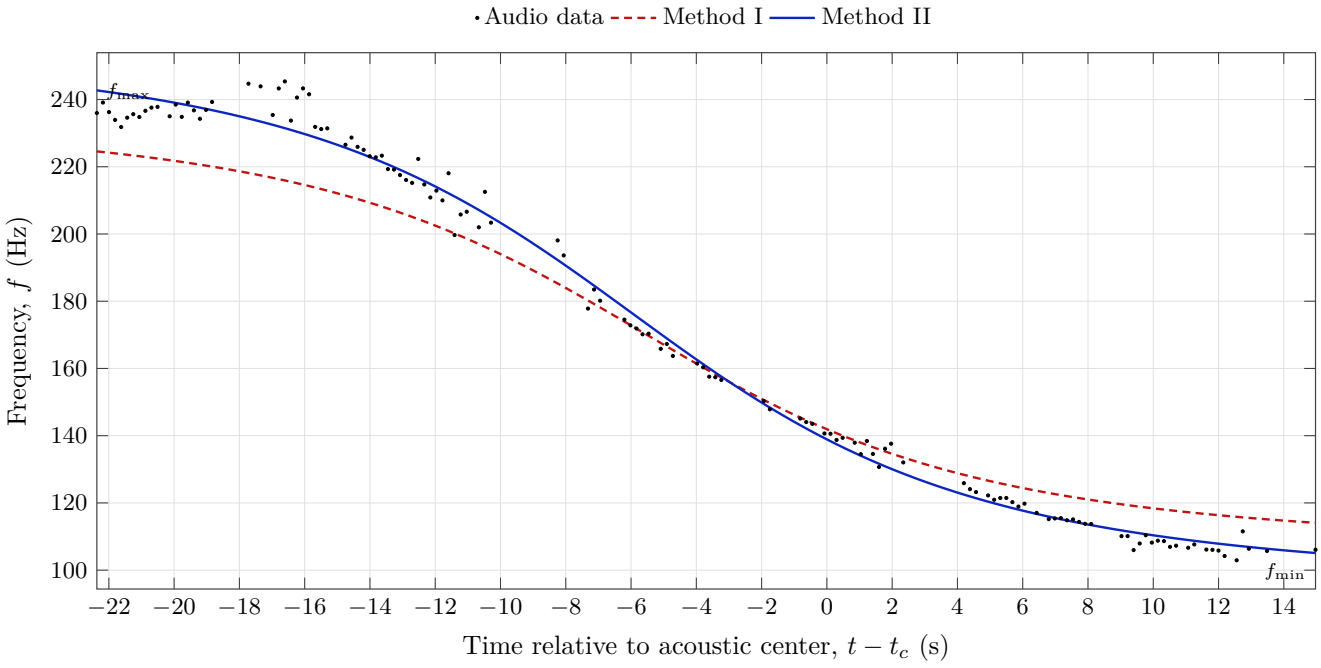

ADS-B speed and height

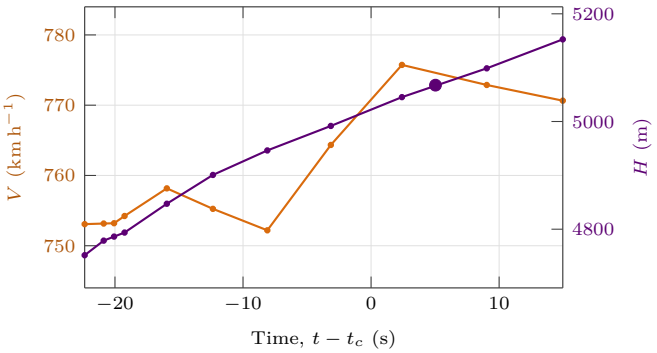

Ground track

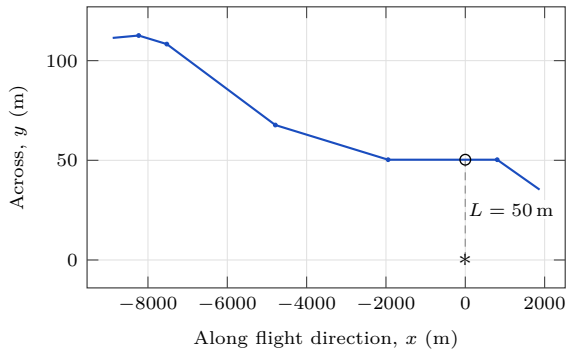

Reference / method	V (km h^{-1})	$R_{\min}$ (m)	L (m)	H (m)
ADS-B	758.16	5067.91	50.26	5067.66
Method I	464.57 ± 3.794	1584.03 ± 72.653	50.26	1583.23 ± 72.690
Method II	563.20 ± 12.808	2018.35 ± 151.234	50.26	2017.72 ± 151.281

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 235.808$ Hz (first 10 points) and $f_{min} = 106.053$ Hz (last 10 points).