

R38: N456CS

UTC audio ridge and N456CS-track-EGM96.kml


V varying H constant; analyzed; audio data with Method I and Method II fitted curves

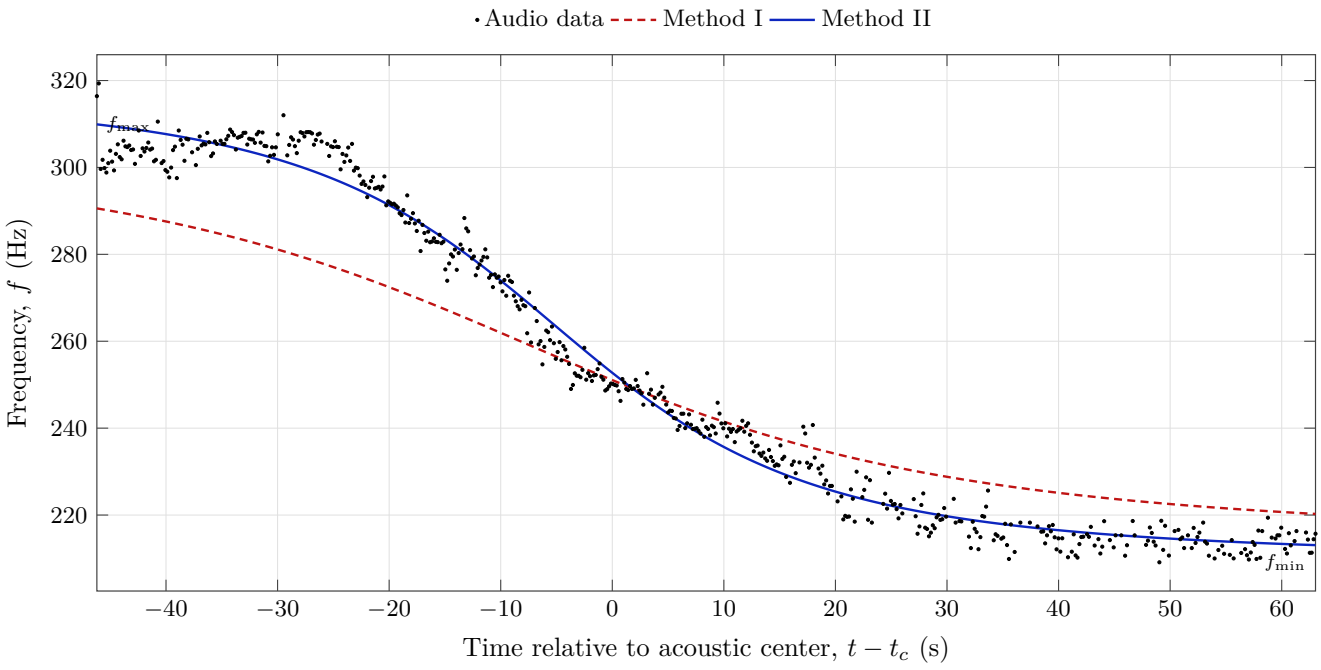

ADS-B speed and height

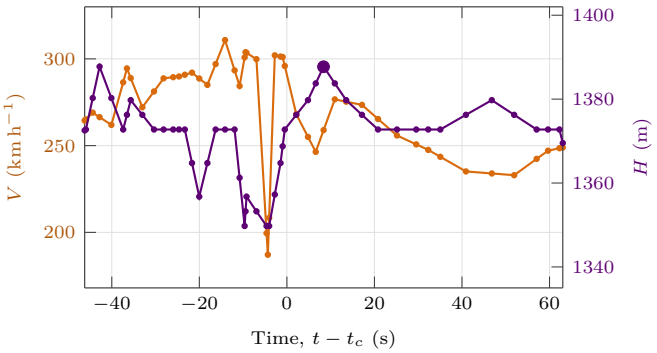

Ground track

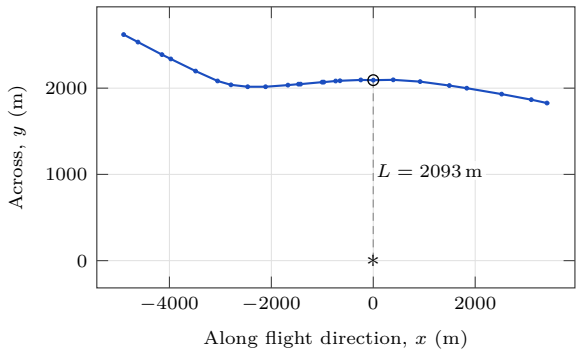

Reference / method	V (km h^{-1})	$R_{\min}$ (m)	L (m)	H (m)
ADS-B	269.01	2511.00	2092.67	1387.76
Method I	214.41 ± 1.073	2490.53 ± 104.562	2092.67	1350.36 ± 192.848
Method II	250.52 ± 2.868	1772.70 ± 67.451	2092.67	–

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 305.054$ Hz (first 81 points) and $f_{min} = 214.111$ Hz (last 81 points).