

R11: N60RS

UTC audio ridge and N60RS-track-EGM96.kml


V varying H constant; analyzed; audio data with Method I and Method II fitted curves

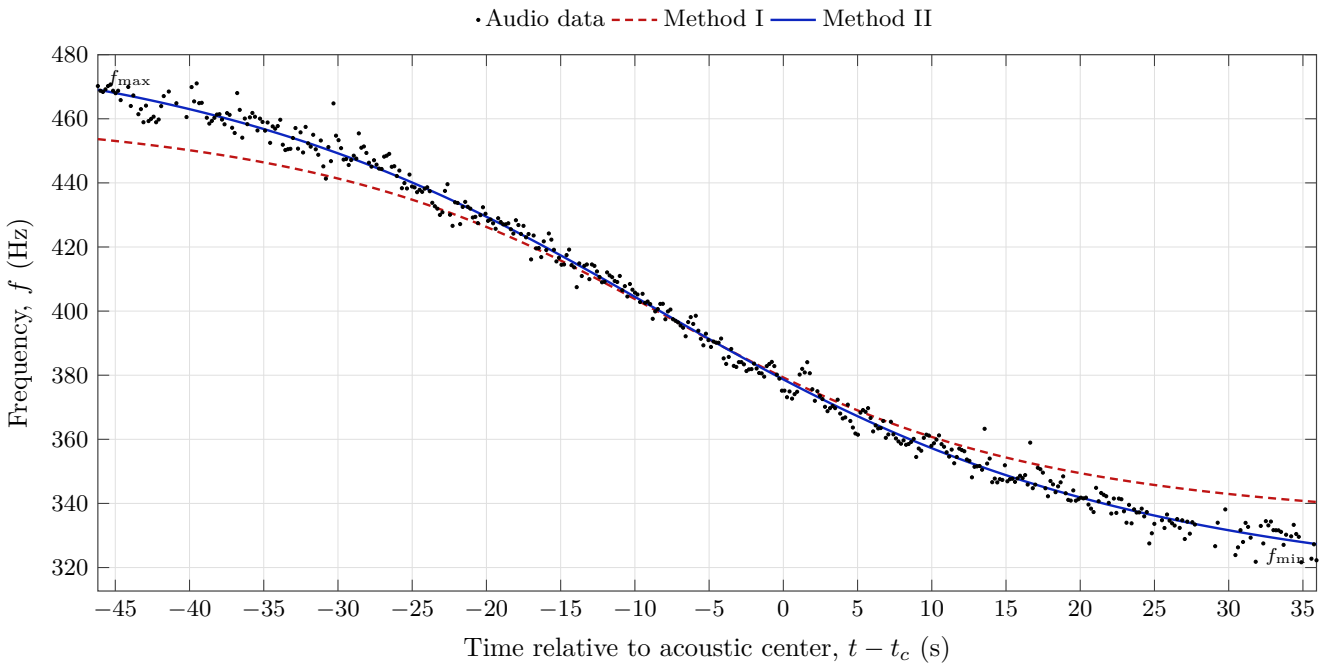

ADS-B speed and height

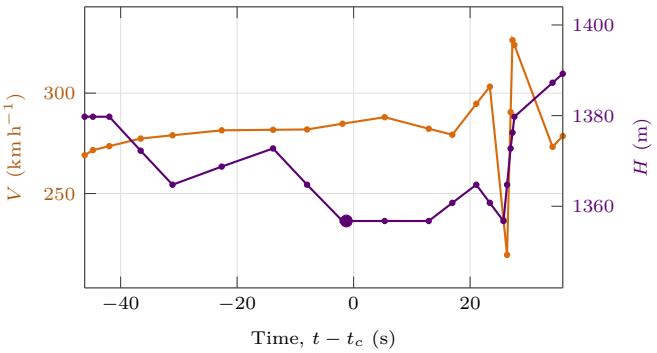

Ground track

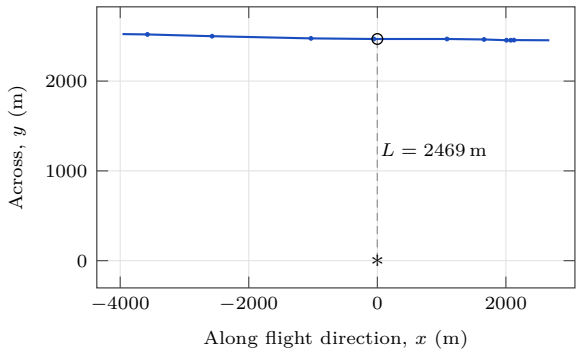

Reference / method	V (km h^{-1})	$R_{\min}$ (m)	L (m)	H (m)
ADS-B	281.48	2816.99	2468.73	1356.76
Method I	208.05 ± 1.905	1571.42 ± 56.850	2468.73	–
Method II	287.49 ± 4.157	2929.16 ± 111.175	2468.73	1576.49 ± 206.565

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{\max} = 465.820$ Hz (first 23 points) and $f_{\min} = 330.469$ Hz (last 23 points).