

R36: N748SP

UTC audio ridge and N748SP-track-EGM96.kml


V varying H constant; analyzed; audio data with Method I and Method II fitted curves

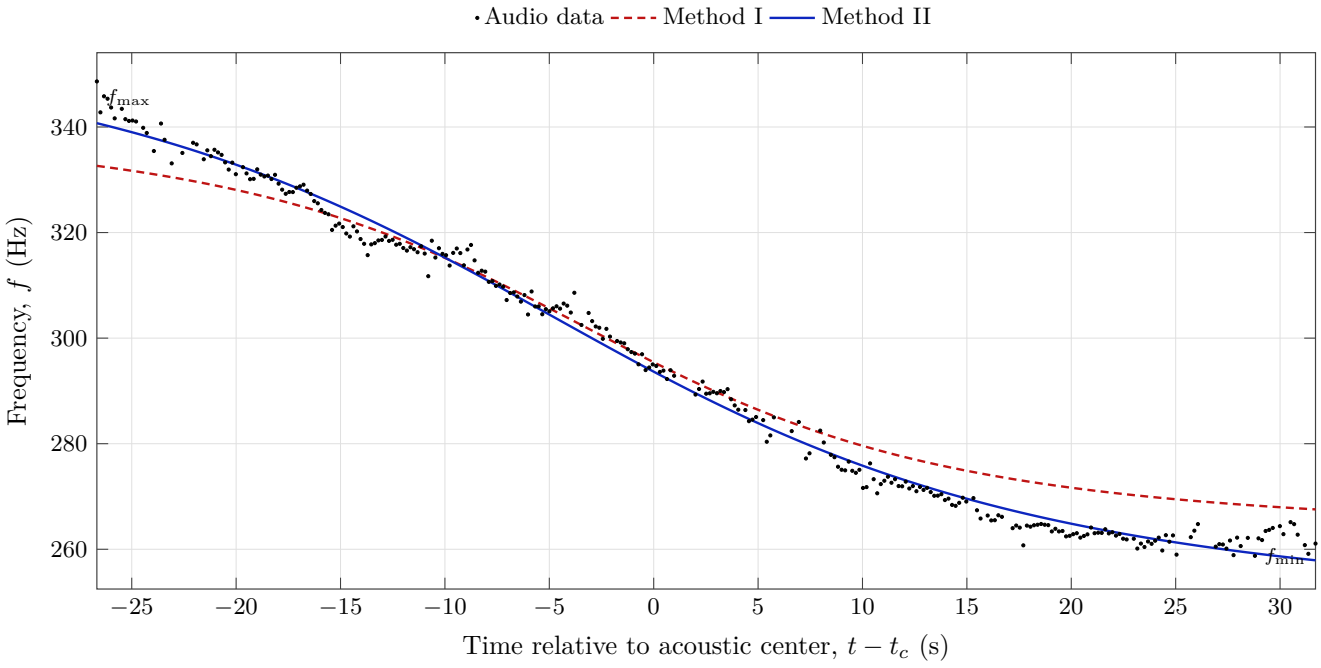

ADS-B speed and height

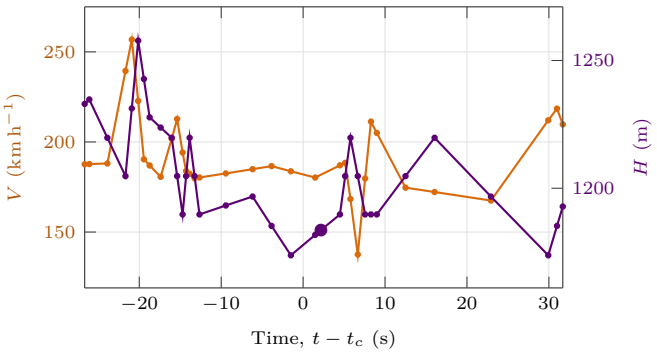

Ground track

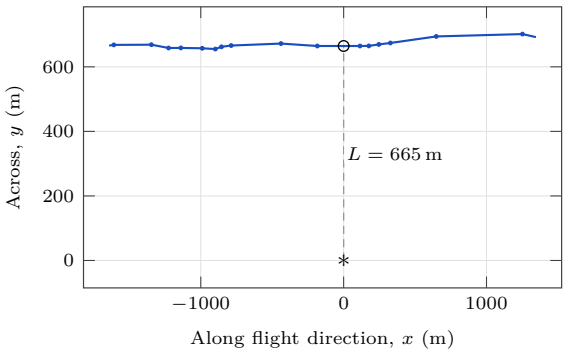

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	180.67	1357.45	664.65	1183.60
Method I	159.45 ± 1.820	851.08 ± 31.069	664.65	531.57 ± 49.742
Method II	227.28 ± 5.412	1648.33 ± 100.693	664.65	1508.38 ± 110.035

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 341.481$ Hz (first 15 points) and $f_{min} = 262.765$ Hz (last 15 points).