

R07: N814SR

UTC audio ridge and N814SR-track-EGM96.kml


V varying H constant; analyzed; audio data with Method I and Method II fitted curves

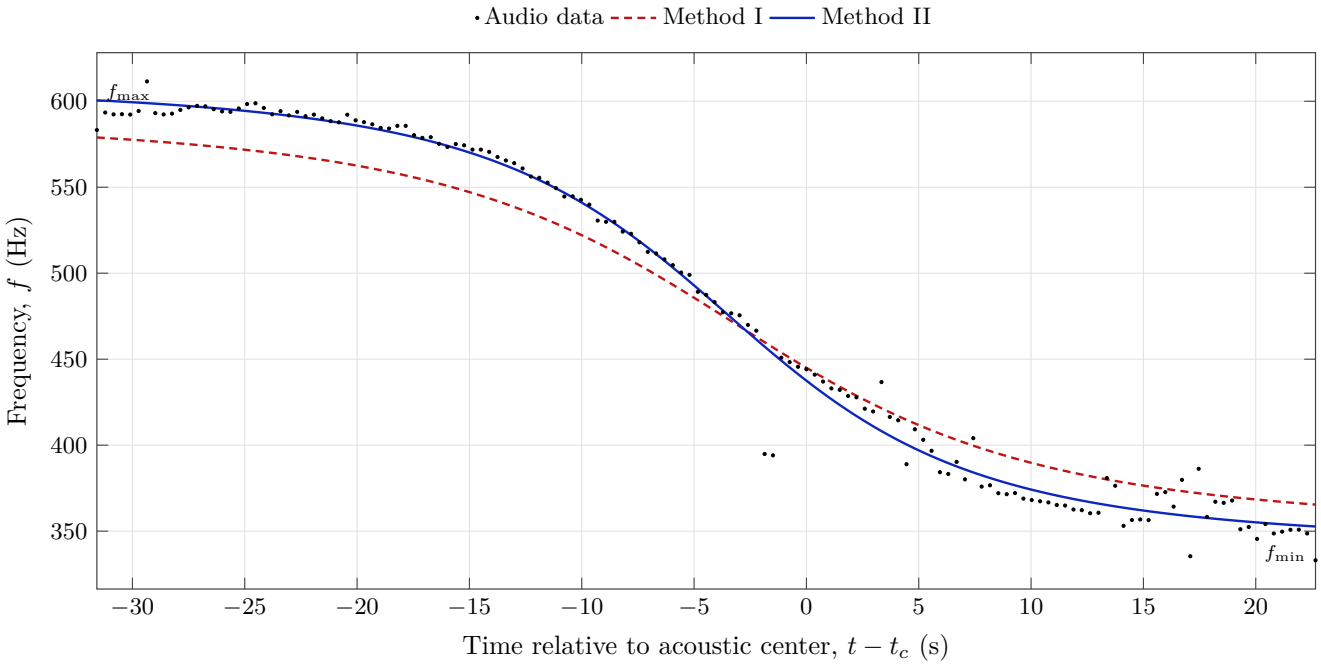

ADS-B speed and height

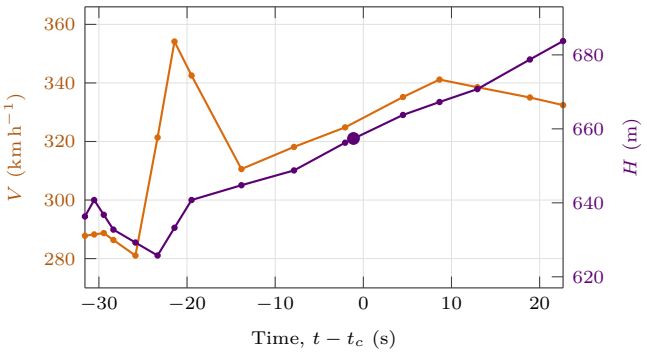

Ground track

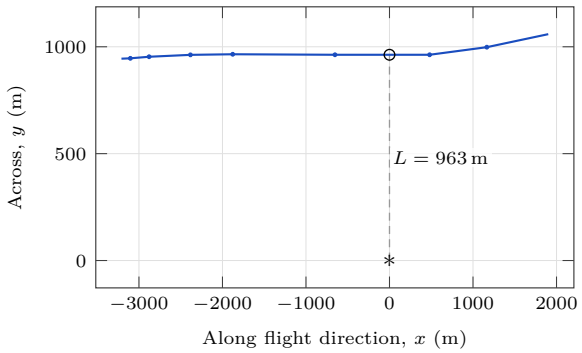

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	324.83	1165.68	962.62	657.39
Method I	315.38 ± 5.234	1327.83 ± 109.019	962.62	914.61 ± 158.275
Method II	347.78 ± 6.884	1191.40 ± 81.966	962.62	701.99 ± 139.112

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 592.478$ Hz (first 7 points) and $f_{min} = 349.712$ Hz (last 7 points).