

R44: N1387U

UTC audio ridge and N1387U-track-EGM96.kml


V varying H varying; analyzed; audio data with Method I and Method II fitted curves

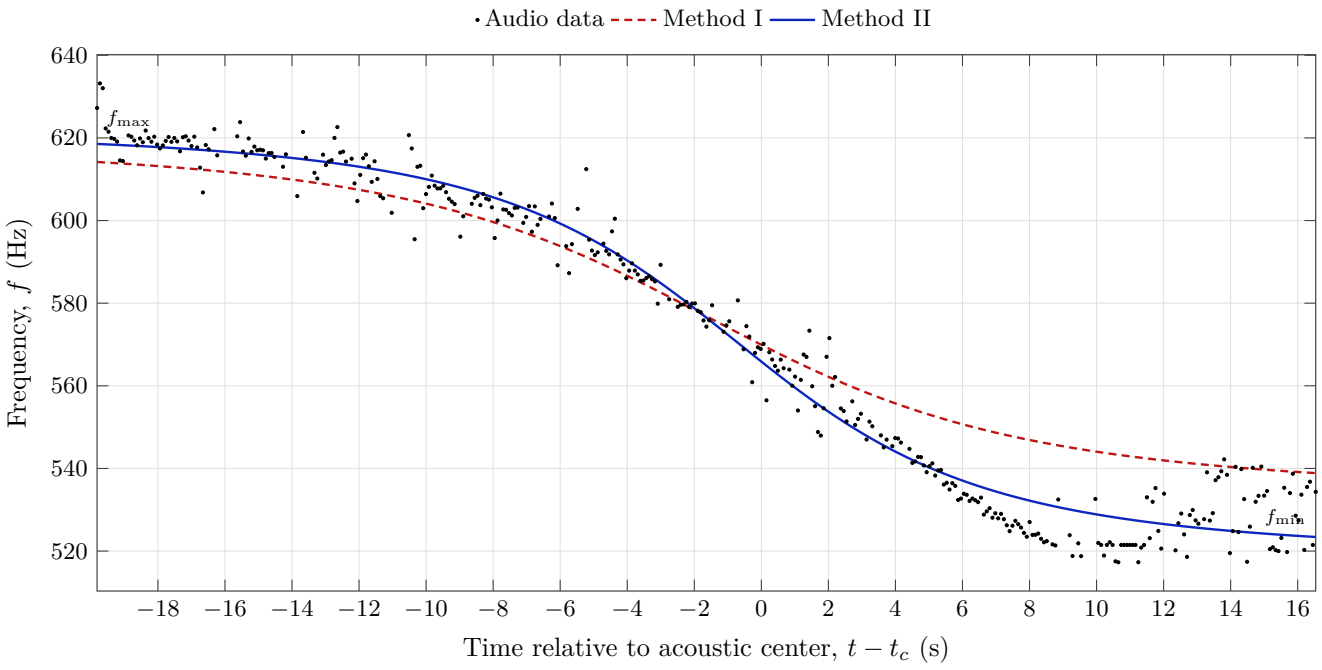

ADS-B speed and height

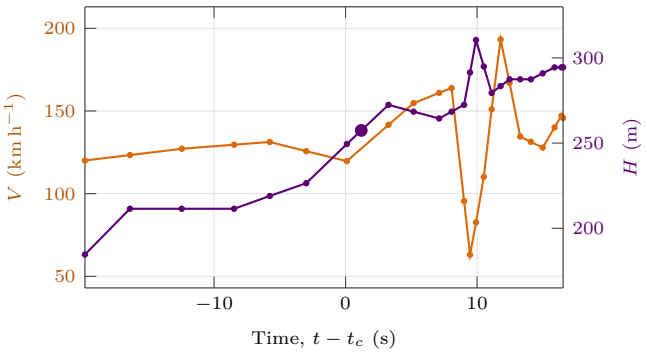

Ground track

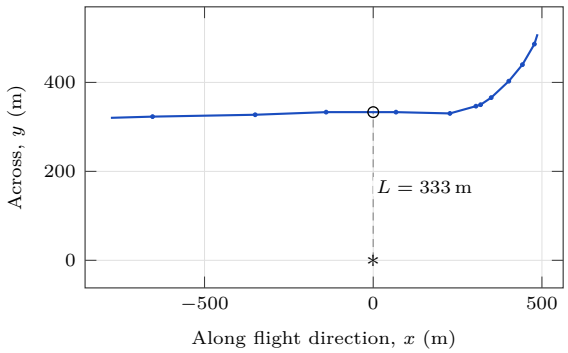

Reference / method	V (km h^{-1})	$R_{\min}$ (m)	L (m)	H (m)
ADS-B	127.15	420.96	333.16	257.32
Method I	91.49 ± 1.620	257.76 ± 18.795	333.16	–
Method II	111.47 ± 2.015	247.67 ± 15.476	333.16	–

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 619.571$ Hz (first 36 points) and $f_{min} = 533.390$ Hz (last 36 points).