

R57: N231DT

UTC audio ridge and N231DT-track-EGM96.kml


V varying H varying; analyzed; audio data with Method I and Method II fitted curves

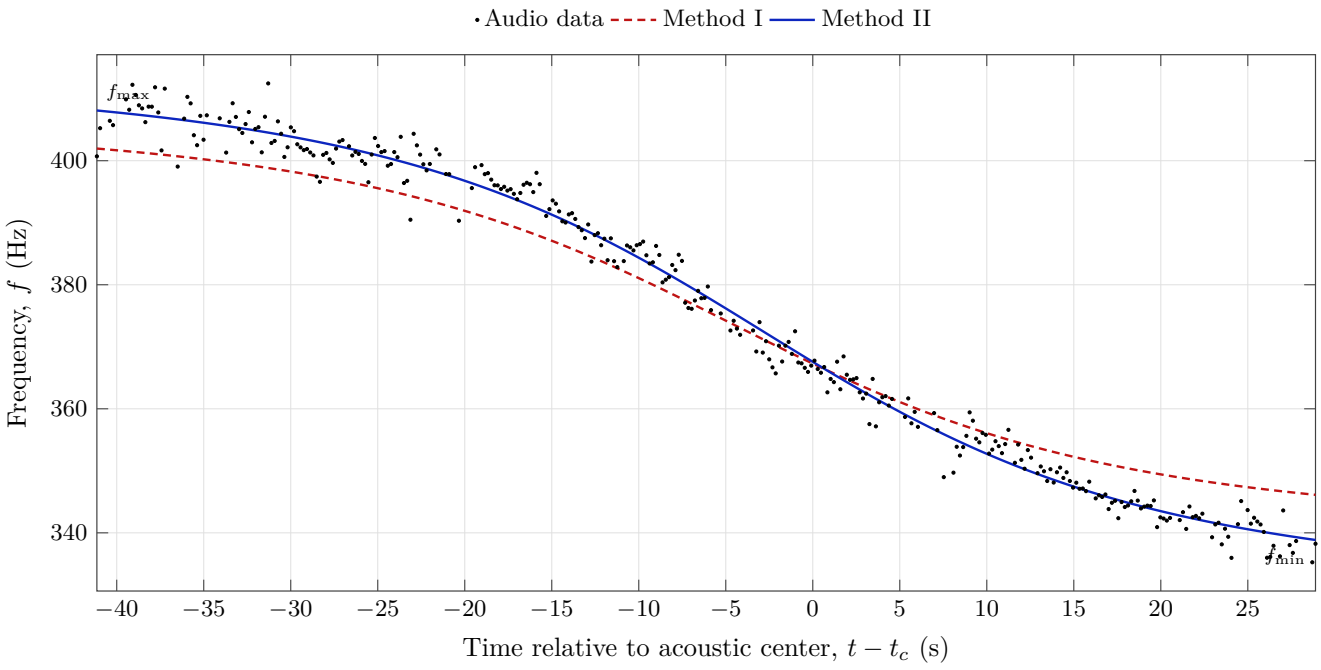

ADS-B speed and height

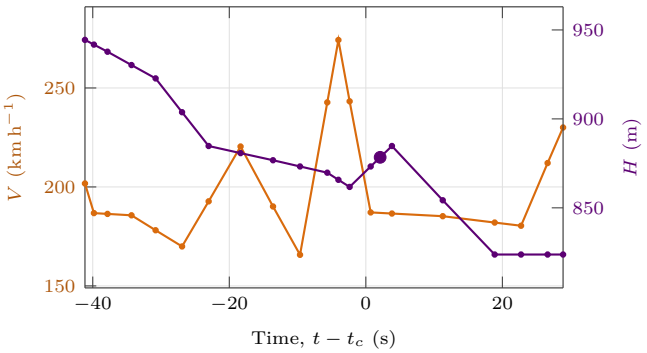

Ground track

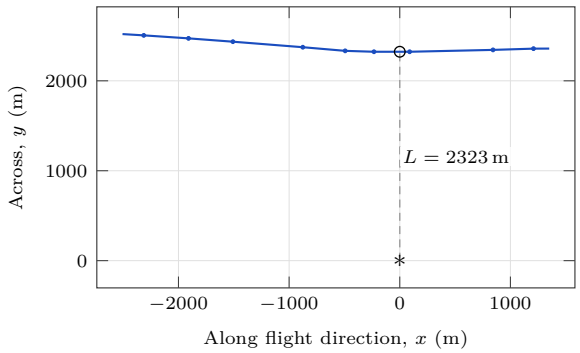

Reference / method	V (km h^{-1})	$R_{\min}$ (m)	L (m)	H (m)
ADS-B	185.22	2483.76	2323.22	878.46
Method I	111.05 ± 1.407	745.73 ± 43.115	2323.22	–
Method II	139.20 ± 2.902	951.03 ± 54.336	2323.22	–

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{\max} = 407.553$ Hz (first 26 points) and $f_{\min} = 339.755$ Hz (last 26 points).