

R08: N2933A

UTC audio ridge and N2933A-track-EGM96.kml


V varying H varying; analyzed; audio data with Method I and Method II fitted curves

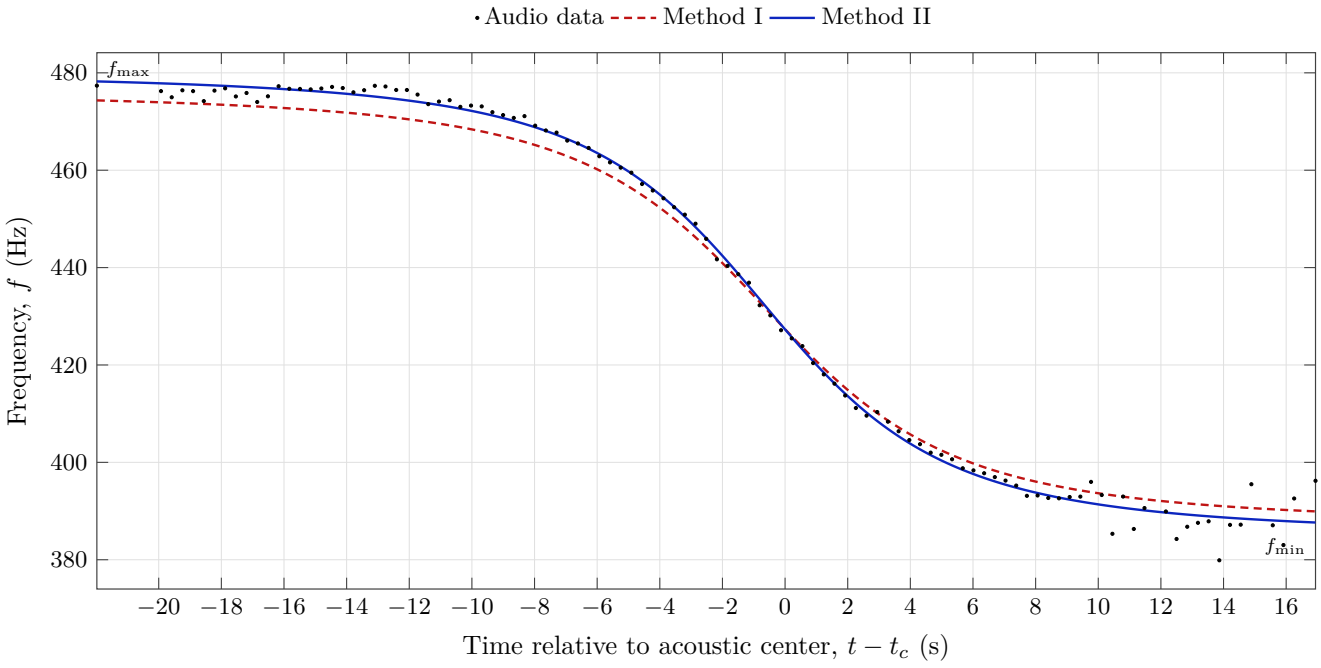

ADS-B speed and height

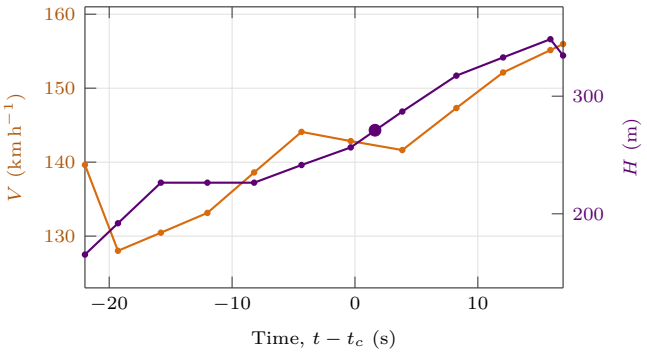

Ground track

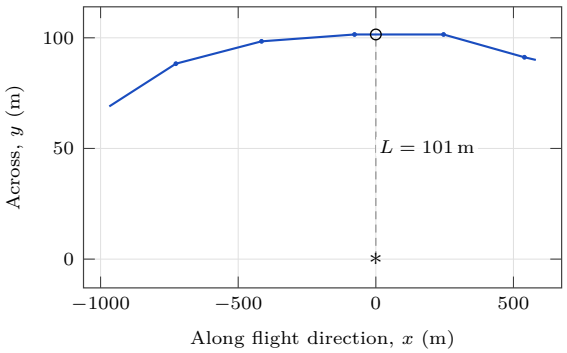

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	141.63	289.30	101.46	270.93
Method I	126.22 ± 2.339	227.39 ± 10.036	101.46	203.49 ± 11.215
Method II	134.67 ± 1.429	233.10 ± 9.538	101.46	209.86 ± 10.594

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 476.242$ Hz (first 11 points) and $f_{min} = 387.205$ Hz (last 11 points).