

R40: N3012N

UTC audio ridge and N3012N-track-EGM96.kml


V varying H varying; analyzed; audio data with Method I and Method II fitted curves

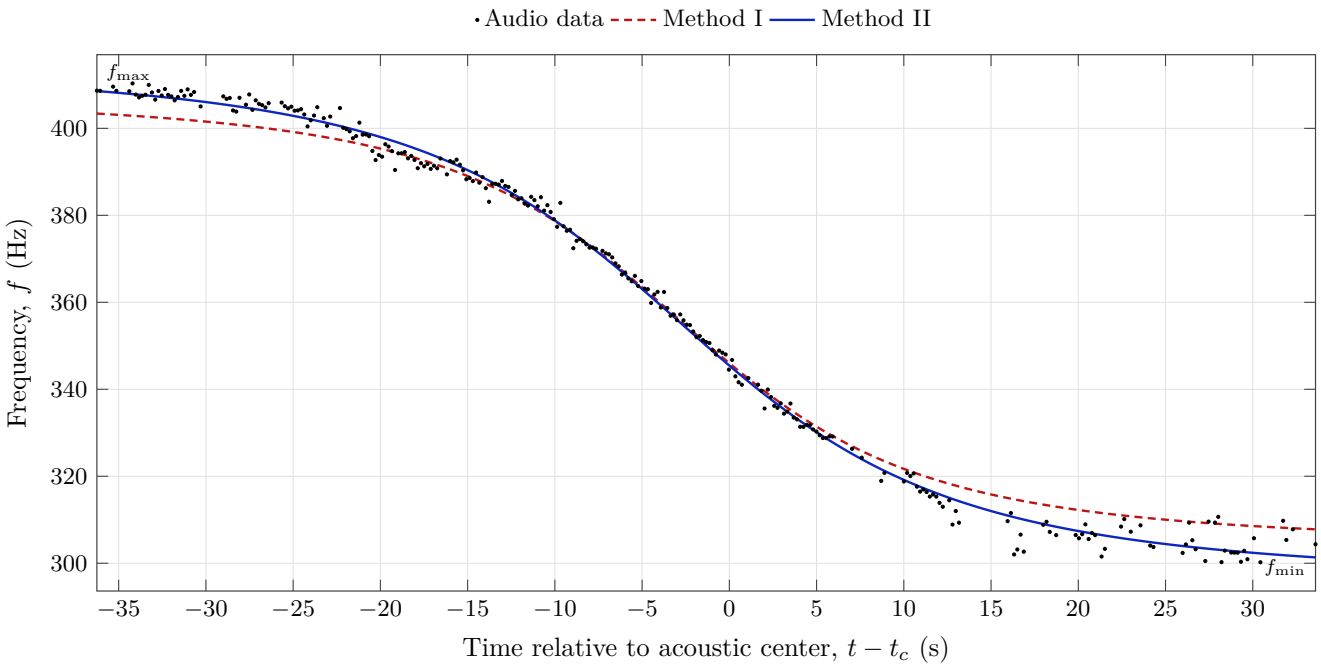

ADS-B speed and height

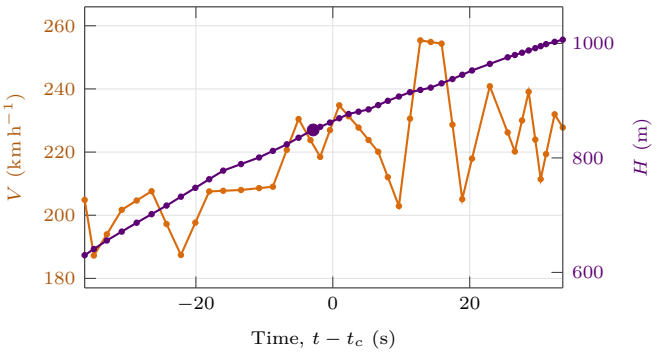

Ground track

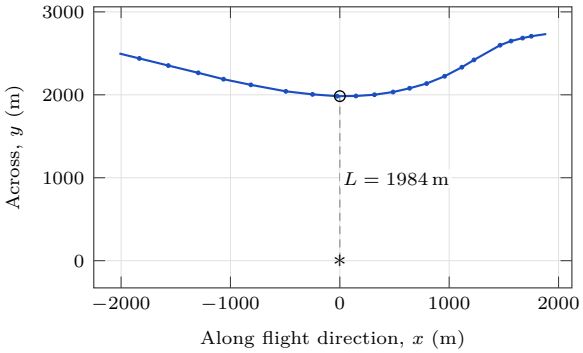

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	209.02	2157.93	1983.91	848.98
Method I	178.31 ± 1.293	732.92 ± 23.666	1983.91	–
Method II	204.78 ± 1.712	963.92 ± 25.711	1983.91	–

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 407.759$ Hz (first 27 points) and $f_{min} = 304.060$ Hz (last 27 points).