

R45: N451EE

UTC audio ridge and N451EE-track-EGM96.kml


V varying H varying; analyzed; audio data with Method I and Method II fitted curves

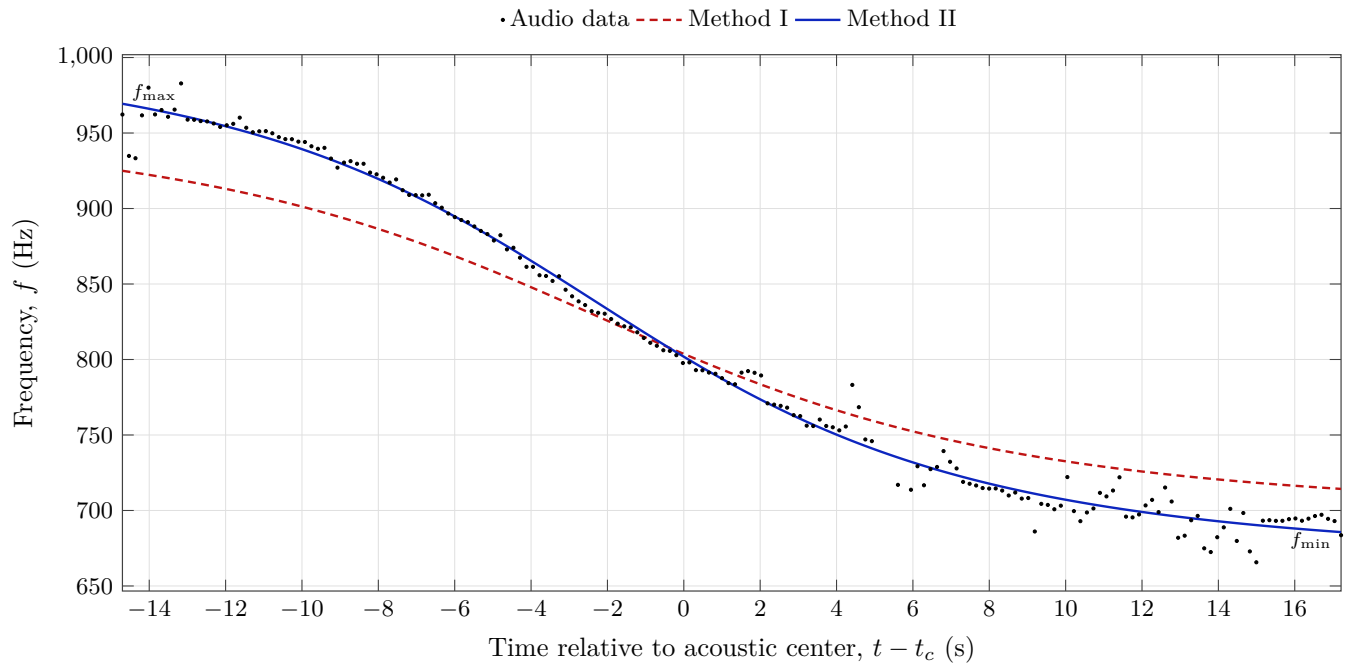

ADS-B speed and height

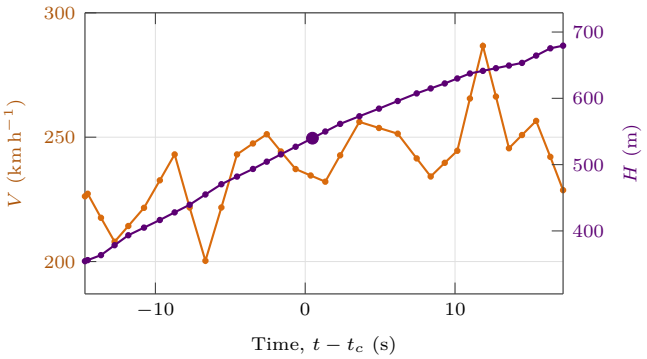

Ground track

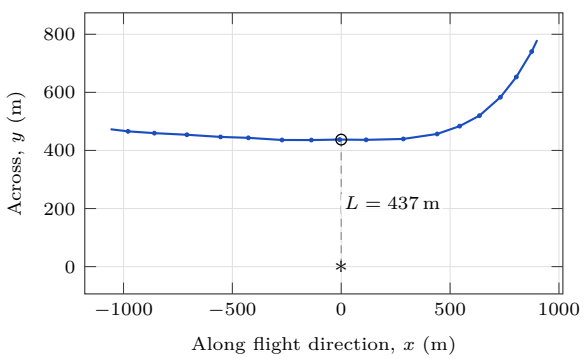

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	243.07	694.85	437.44	539.87
Method I	197.85 ± 3.293	665.89 ± 47.816	437.44	502.04 ± 63.421
Method II	253.97 ± 5.461	775.55 ± 48.489	437.44	640.40 ± 58.721

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 962.255$ Hz (first 9 points) and $f_{min} = 694.459$ Hz (last 9 points).