

R51: N451EE

UTC audio ridge and N451EE-track-EGM96.kml


V varying H varying; analyzed; audio data with Method I and Method II fitted curves

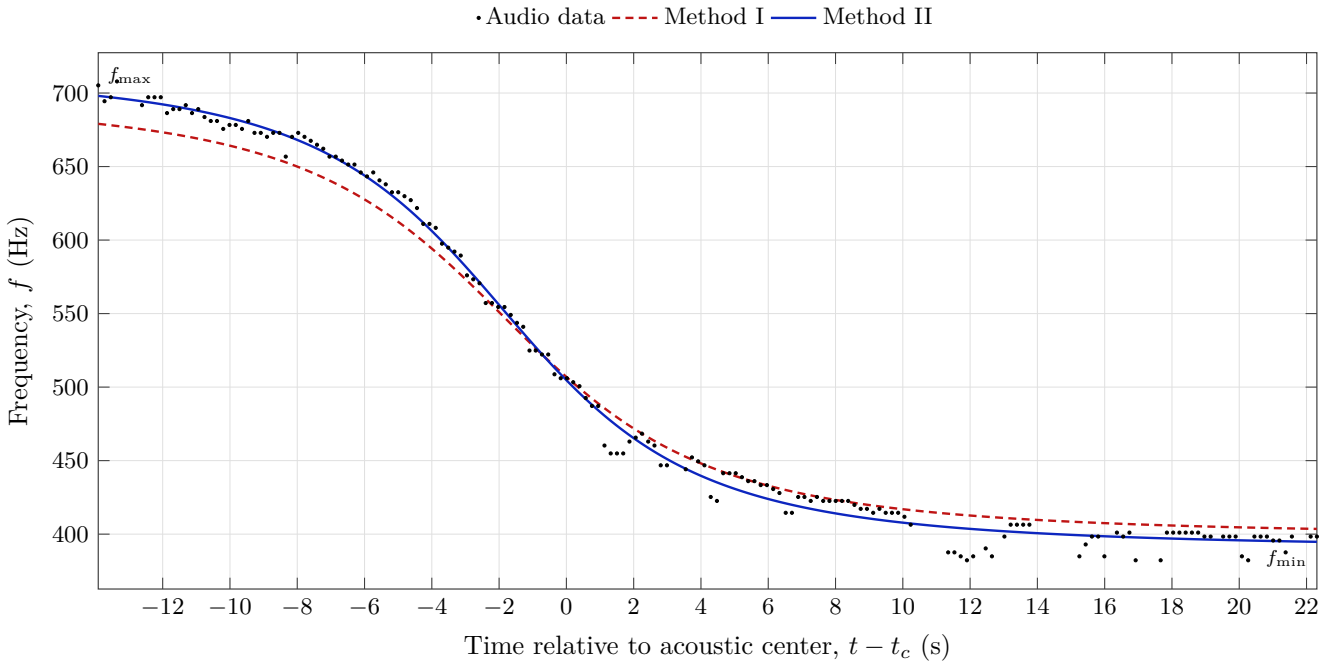

ADS-B speed and height

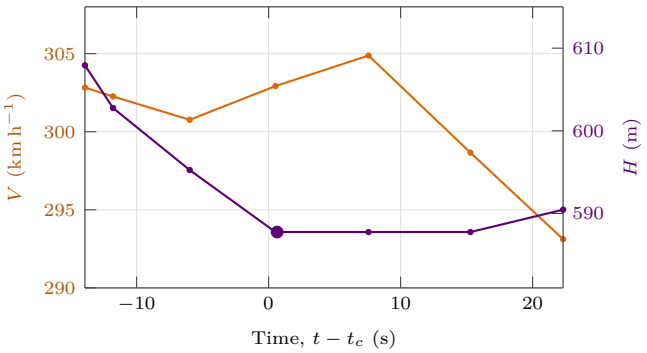

Ground track

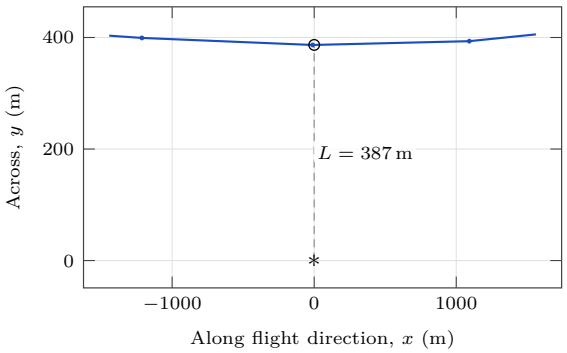

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	300.76	703.53	386.66	587.76
Method I	333.82 ± 2.434	630.64 ± 38.029	386.66	498.20 ± 48.138
Method II	360.79 ± 3.267	639.85 ± 22.449	386.66	509.81 ± 28.175

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 697.137$ Hz (first 8 points) and $f_{min} = 398.364$ Hz (last 8 points).