

R48: N662EZ

UTC audio ridge and N662EZ-track-EGM96.kml


V varying H varying; analyzed; audio data with Method I and Method II fitted curves

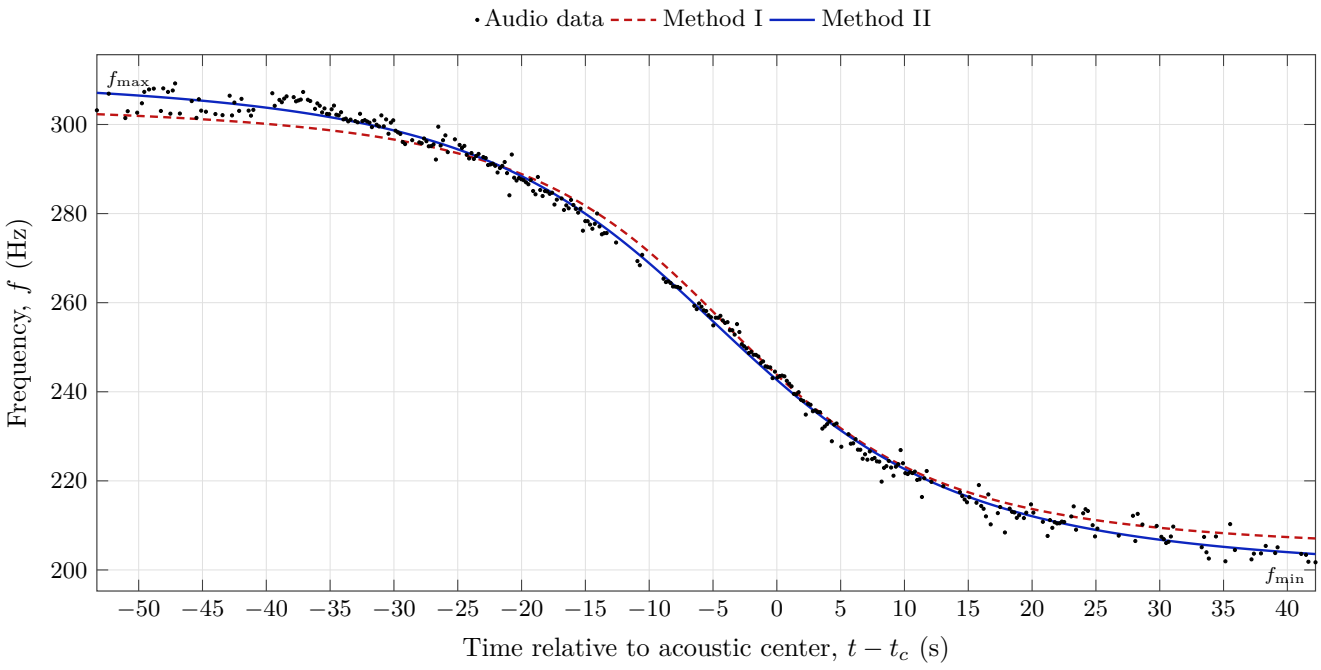

ADS-B speed and height

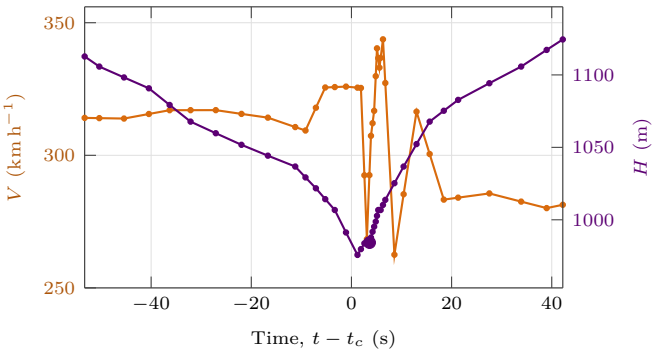

Ground track

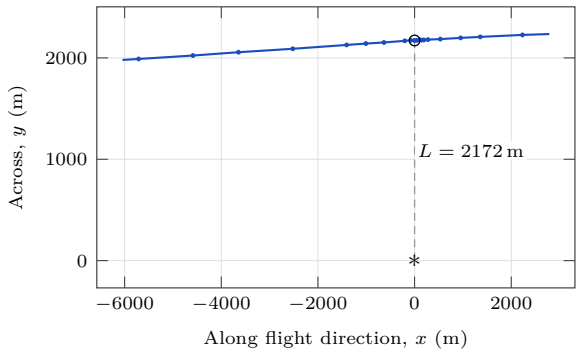

Reference / method	V (km h^{-1})	$R_{\min}$ (m)	L (m)	H (m)
ADS-B	314.20	2384.42	2172.02	983.76
Method I	244.19 ± 2.016	1219.13 ± 29.317	2172.02	–
Method II	271.26 ± 1.800	1623.02 ± 34.005	2172.02	–

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 305.251$ Hz (first 17 points) and $f_{min} = 203.713$ Hz (last 17 points).