

R24: N9658K

UTC audio ridge and N9658K-track-EGM96.kml


V varying H varying; analyzed; audio data with Method I and Method II fitted curves

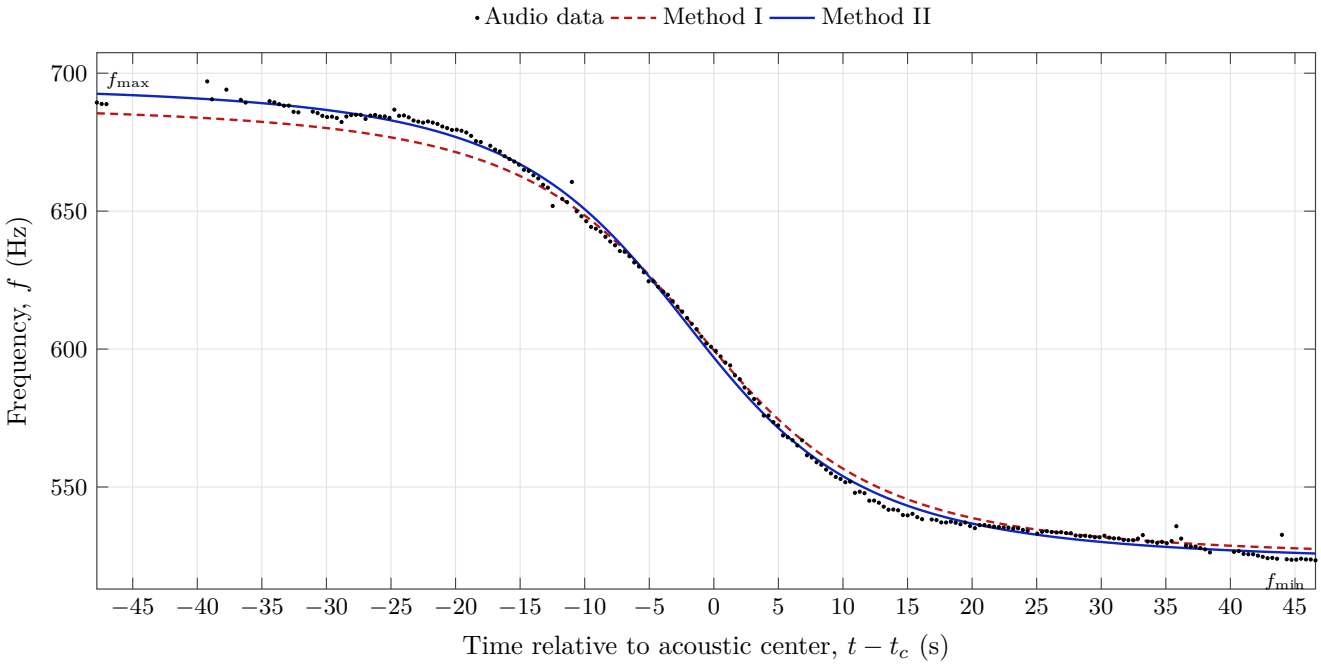

ADS-B speed and height

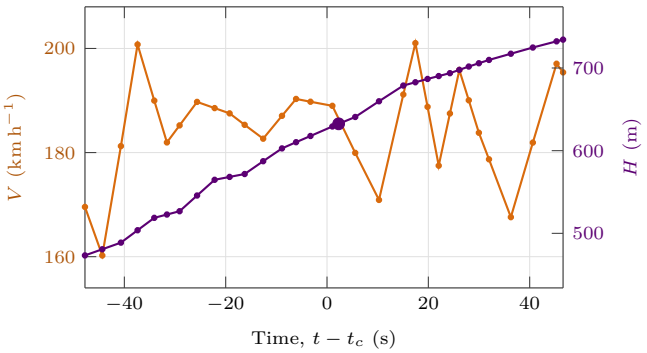

Ground track

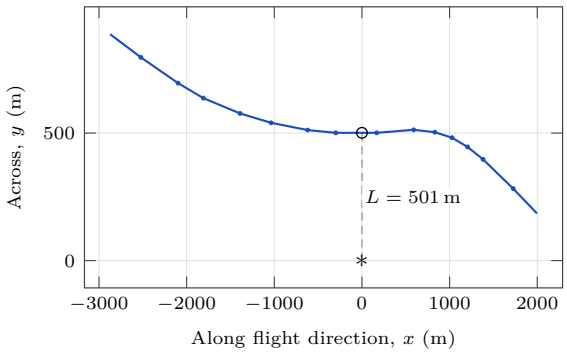

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	187.53	806.87	501.01	632.48
Method I	167.09 ± 1.149	698.20 ± 12.120	501.01	486.29 ± 17.402
Method II	175.28 ± 0.775	722.84 ± 12.292	501.01	521.04 ± 17.053

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 689.419$ Hz (first 11 points) and $f_{min} = 523.804$ Hz (last 11 points).