
DRAFT / LV-001 DC ONLY. One selected tap, one ADC channel.
J1/J2/J3 pin numbers are LOCAL to this fixture; board mapping is TBD.

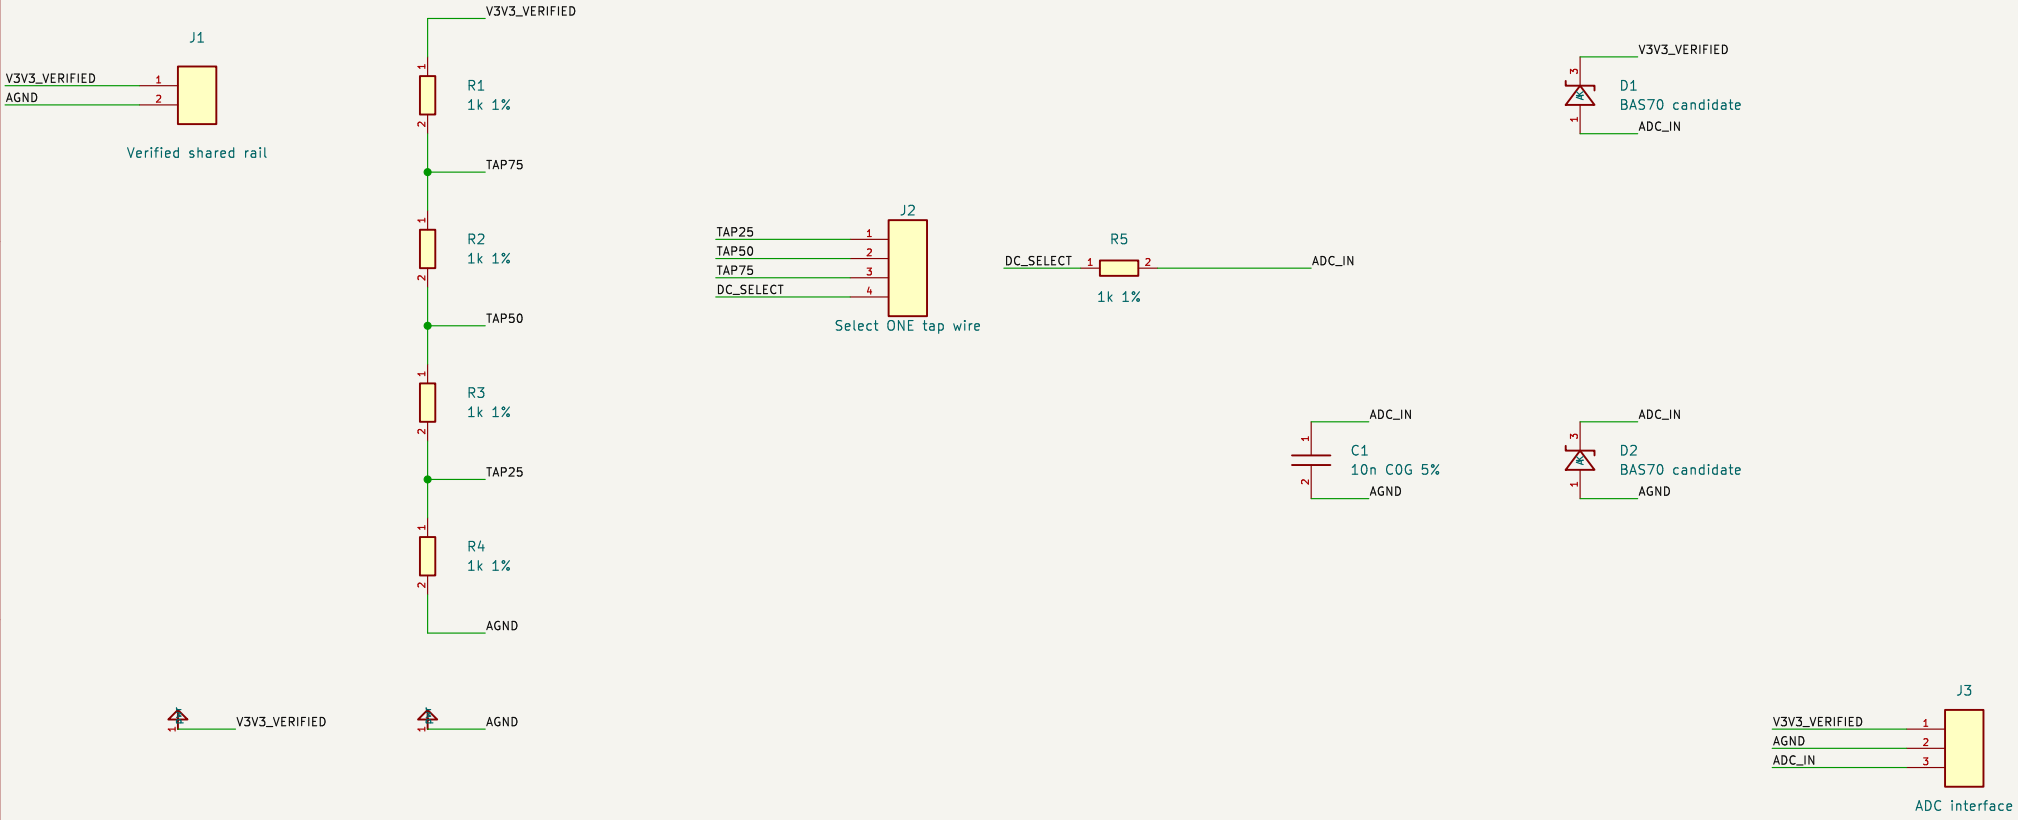

Nominal 3.3 V: taps 0.825 / 1.650 / 2.475 V. Worst Rsource = 2k.
No external PSU or ignition signal enters this fixture. Disconnect power before tap changes.
D1/D2 only candidate secondary clamps: rail back-power and −0.41 V / rail+0.41 V remain unresolved.
3.3 V rail source, power budget, grounds and actual ADC header must be verified first.
C1 adds settling memory: see calculate.py and README. No anti-alias accuracy claim.

Candidate calculation. Physical verification and Critic-A review pending.
LOW VOLTAGE ONLY. NO BLUE PILL OR ST-LINK PINOUT ASSERTED.
stm32_motortester

Sheet: /
File: option-a-dc.kicad_sch

Title: Option A – LV DC fixture (DRAFT)

Size: A4	Date: 2026-10-10	**Rev: DRAFT-0.1**
KiCad E.D.A. 9.0.2		Id: 1/1