
DRAFT / LV LAB SOURCE ONLY. Source stays within −0.5 to +0.5 V, including transients.
All supply and ground connections belong to one VERIFIED domain. Never drive while unpowered.

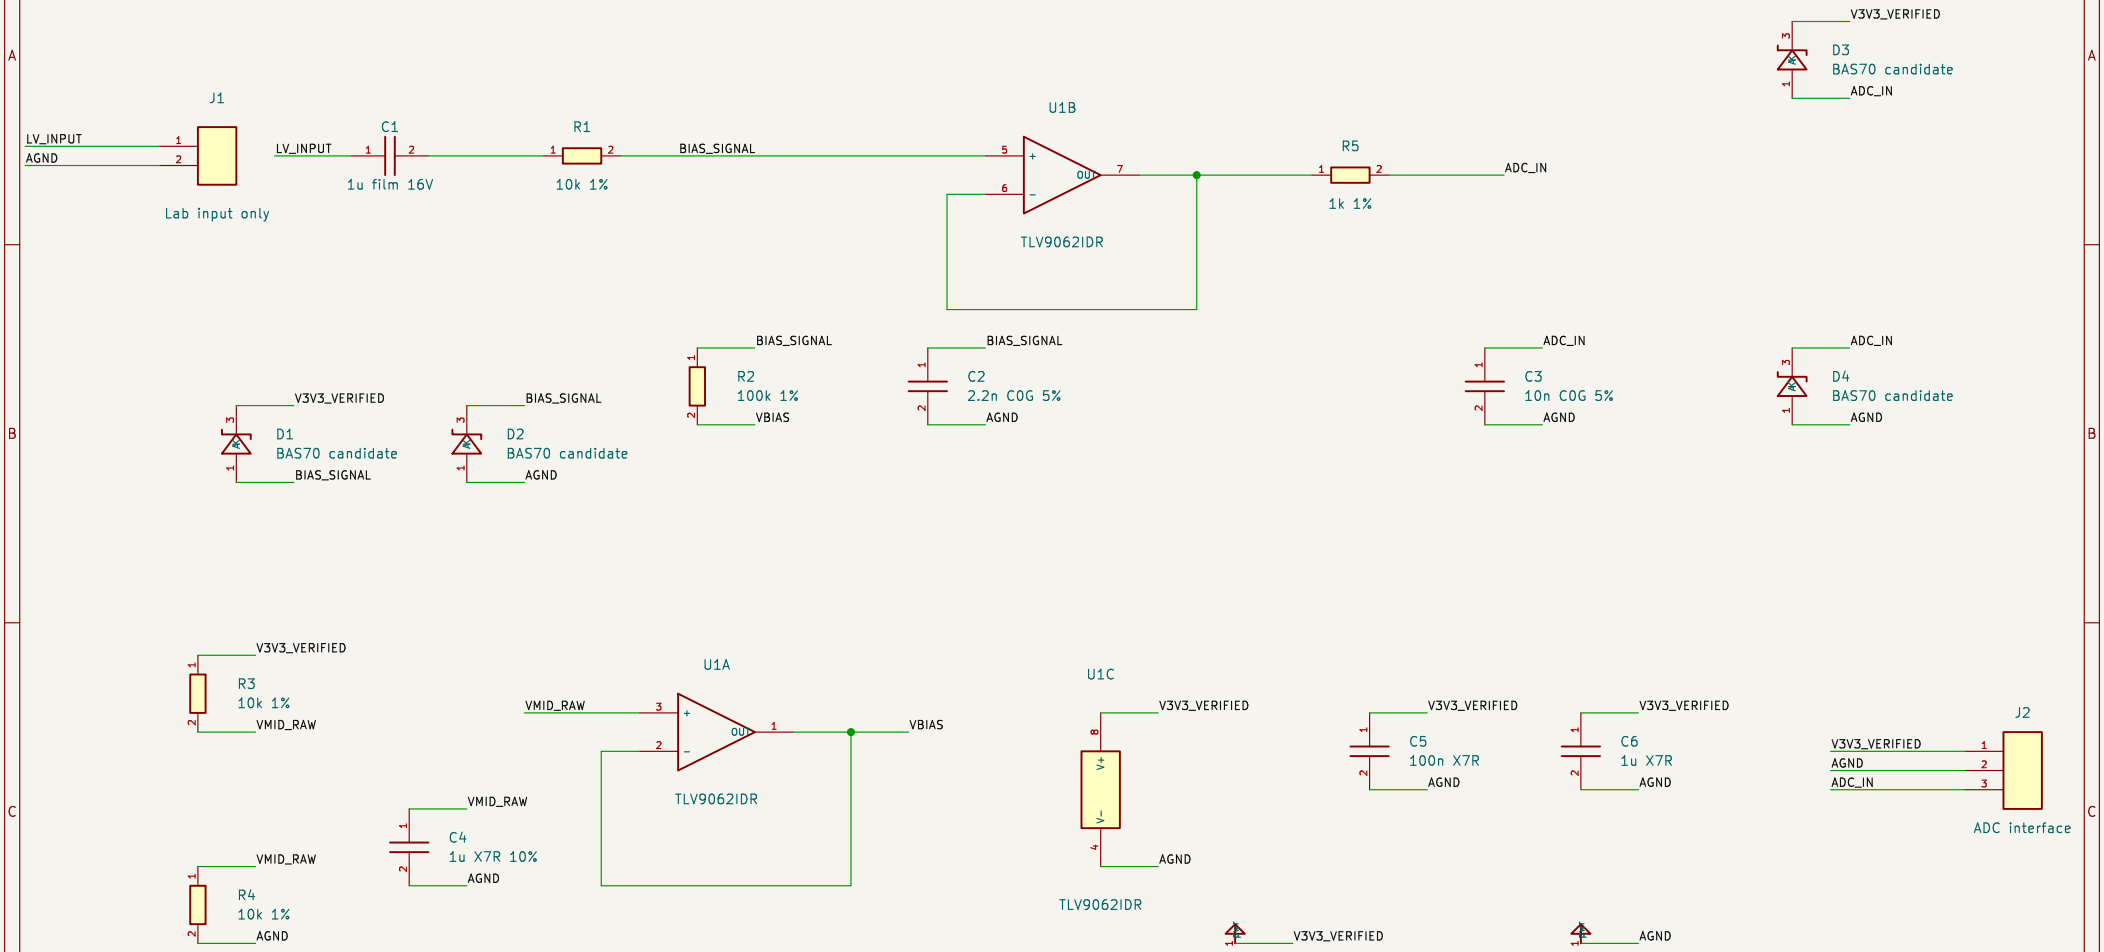

R2 loads a capacitive sensor; this circuit DOES NOT preserve an unknown ignition plateau.
Nominal low-voltage model: gain ~0.909, HP ~1.45 Hz, LP ~7.96 kHz plus ~15.9 kHz.
D1–D4 do not prove fault protection. No hot-plug/unpowered-input/24V/HV rating.
Local pin numbers only. Rail current, clamp recovery, stability, ground paths and board mapping TBD.

Candidate calculation. Physical verification and Critic-A review pending.
LOW VOLTAGE ONLY. NO BLUE PILL OR ST-LINK PINOUT ASSERTED.

stm32_motortester

Sheet: /
File: option-b-ac.kicad_sch

Title: Option B – LV AC buffer (DRAFT)

Size: A4	Date: 2026-10-10	**Rev: DRAFT-0.1**
KiCad E.D.A. 9.0.2		Id: 1/1