

Lateral Valves

Barb x Barb

12mm x 12mm
12mm x 16mm
12mm x 20mm



Barb x Barb

16mm x 16mm
16mm x 20mm
20mm x 20mm



1/2" Male Thread x Barb

1/2" Male Thread x 12mm
1/2" Male Thread x 16mm
1/2" Male Thread x 20mm



3/4" Femal/e Thread x Barb

3/4" Female Thread x 12mm
3/4" Female Thread x 16mm
3/4" Female Thread x 20mm



3/4" Male Thread x BARB

3/4" Male Thread x 12mm
3/4" Male Thread x 16mm
3/4" Male Thread x 20mm



Male Thread x Male Thread

1/2" Male Thread x 1/2" Male Thread
3/4" Male Thread x 3/4" Male Thread




Swing Joints


1/2", 3/4" & 1"



Performance Graph

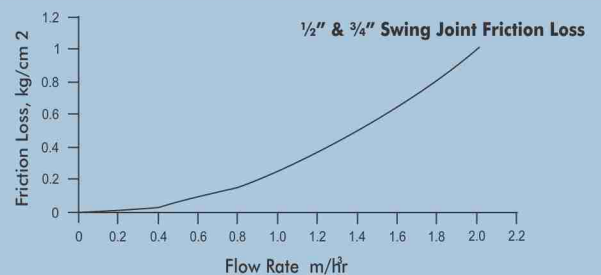

Performance Graph

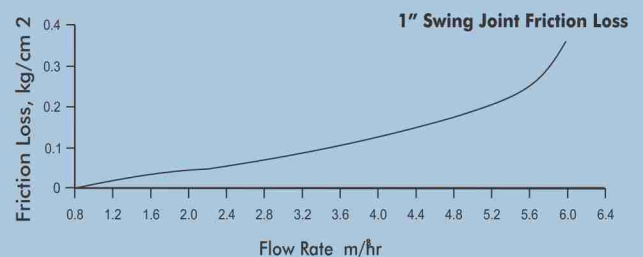

Model No.

Product Name

AQ-ASJ	1/2" Male thread connection
AQ-BSJ	3/4" Male thread connection
AQ-CSJ	1" Male thread connection

Performance Graph

- Full 3 way adjustability including height
- Durable polyethylene construction used for 1/2" & 3/4"
- Hi-Impact PVC material used for construction for 1"
- High quality EPDM O-ring threads used for seals
- Full 360° adjustment
- Heat resistant - operates at 50° C also