


# Flanged Ball Valves

2 1/2" & 3"



AQ - 68FL

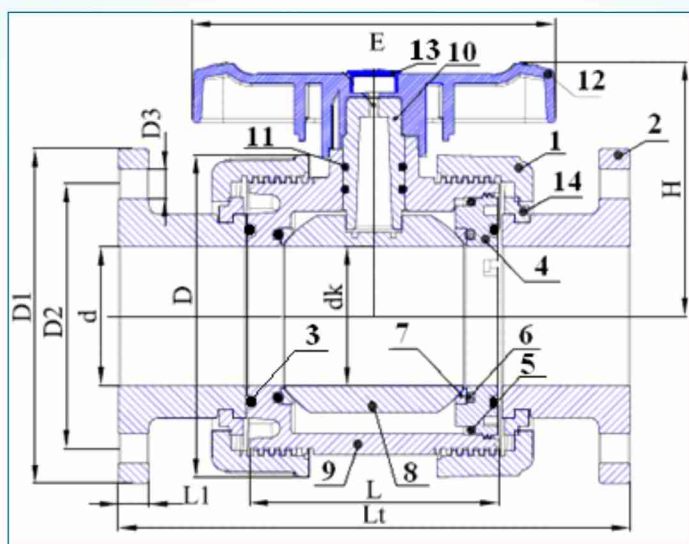

## Features

- Quarter turn handle operated ball valve
- End connections : Flanged type
- Max. Pressure : 8 Bar/ 110Psi
- Ture union with flanged end design for easier installation or repair, without expanding the pipe system.
- User friendly design allows smooth operation of handle.
- Union nut load does not transfer onto ball.
- In build Spanner wrench on Handle for valve dissemble /assemble.
- TPE Seals with O-ring gives cushioning effect that ensures leakage free and low fixed torque.
- Chemical/Corrosion resistant, Color UV stabilized.



## Specification of Material

Position	Description	Material	Qty.
1	Ring	UPVC	2
2	Socket	UPVC	2
3	Bush Small O-Ring	NBR	2
4	Bush	UPVC	1
5	Bush Big O-Ring	NBR	1
6	*Seal O-Ring	NBR	2
7	Seal	EPDM/TPE	2
8	Ball	UPVC	1
9	Body	UPVC	1
10	Shaft	UPVC	1
11	Shaft O-Ring	NBR	2
12	Handle	ABS	1
13	Handle Logo	ABS	1
14	Flange Clamp	UPVC	2

\* Only in 3" Ball valve.

## Dimensions

Size	d	dk	D	D1	D2	L	L1	Lt	E	H
65mm(2 1/2")	60	59	132	164	126	102.5	15.8	210	162.4	106
80mm(3")	76	76	176.8	183.8	145.3	141.3	16	275.4	200	139