

T Type Disc Filters

AQ-135TL(HC)



Max. Operating Pressure	6 Kg/cm ²
Clamp Material	Nylon Reinforced
Vacuum Breaker	For upside up installation
Drain port location	Front of the filter Body
Flow passes through outside to inside of Disc stake.	

AQ-135TL



Max. Operating Pressure	8 Kg/cm ²
Clamp Material	Stainless Steel
Vacuum Breaker	Not fit with this design
Drain port location	Below the Filter barrel
Flow passes through outside to inside of Disc stake.	

Specifications	AQ-135TL(HC) & AQ-135TL	
	US Standard	Metric Standard
Inlet / outlet	2 1/2" NPT	2 1/2" BSP
Range of Flow Rate	155-200 GPM	35-45 m ³ /hr
Nominal Flow Rate	176 GPM	40 m ³ /hr
Filtration Surface Area	185 in ²	1193cm ²
Material of Construction	Reinforced Polypropylene	
Material of Disc	Polypropylene Disc	
Cartridge Diameter	4.76 Inches	121mm
Cartridge Length	15.75 Inches	400mm
Available Mesh	120, 150 mesh	120, 150 mesh


Filtering Element

120 Mesh	
150 Mesh	


Head Loss : AQ-135TL(HC) & AQ-135TL

Flow m ³ /hr	28	35	40	45
Pressure Loss kg/cm ²	0.10	0.22	0.29	0.37
Flow GPM	123	155	175	200
Pressure Loss PSI	1.37	3.06	4.03	5.43

T Type Disc Filters

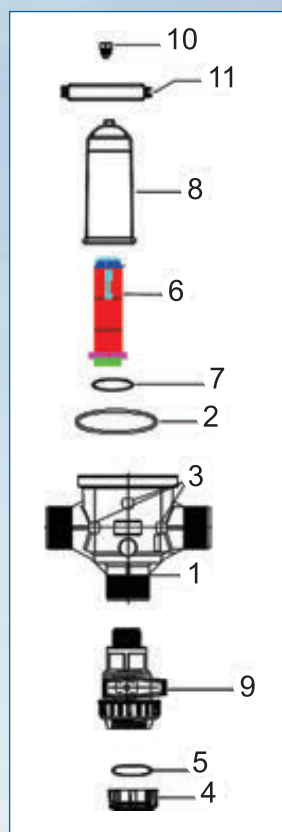

2 1/2" Disc Filter [Model 135 TL(HC) - 40 m³/hr]				
AIPL CODE	DESCRIPTION	INLET/OUTLET	CONNECTION SIZE	MICRON /MESH
14350030	2 1/2" Disc Filter T-Type (With Hybrid Clamp) 120 Mesh	Male Thread NPT	2 1/2"	130/120
14070086	2 1/2" Disc Filter T-Type (With Hybrid Clamp) 120 Mesh	Male Thread BSP	2 1/2"	130/120
SPARE PARTS				
S. NO	PARTS NAME	PART CODE	MATERIAL	QTY
1	Plain Body (BSP Thread)	12490077	Glass reinforced PP	1
	Plain Body (NPT Thread)	12490126		
2	Gasket	50030031	NBR	1
3	Brass Bush	50100033	Brass	3
4	End Cap (BSP Thread)	12490120	Glass reinforced PP	1
	End Cap (NPT Thread)	12490129		
5	End Cap O-Ring	14120001	NBR	1
6	Disc Cartridge (120 Mesh)	14010047	Glass reinforced PP	1
	Disc Cartridge (150 Mesh)	14010049		
7	Cartridge O-Ring	50010087	NBR	1
8	Barrel	12490007	Glass reinforced PP	1
9	3/4"x3/4" FXM Ball Valve	19070001	PP	1
10	3/4" Vacuum Breaker	25100051	Glass reinforced PP	1
11	Hybrid Clamp (SS Long Handle)	14050038	Glass reinforced PA	1

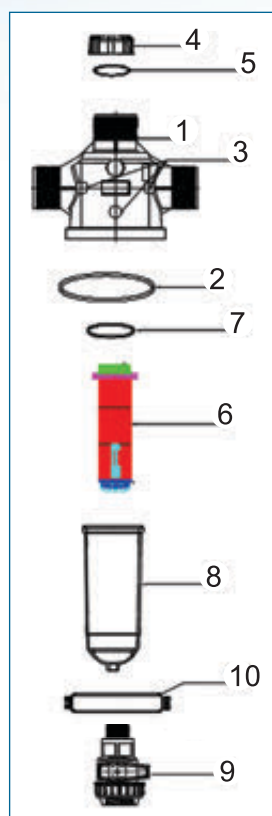

2 1/2" Disc Filter [Model 135 TL - 40 m³/hr]				
AIPL CODE	DESCRIPTION	INLET/OUTLET	CONNECTION SIZE	MICRON /MESH
14340004	2 1/2" Disc Filter T-Type (With SS Clamp) 120 Mesh	Male Thread NPT	2 1/2"	130/120
14010006	2 1/2" Disc Filter T-Type (With SS Clamp) 120 Mesh	Male Thread BSP	2 1/2"	130/120
SPARE PARTS				
S. NO	PARTS NAME	PART CODE	MATERIAL	QTY
1	Plain Body (BSP Thread)	12490077	Glass reinforced PP	1
	Plain Body (NPT Thread)	12490126		
2	Gasket	50030031	NBR	1
3	Brass Bush	50100033	Brass	3
4	End Cap (BSP Thread)	12490120	Glass reinforced PP	1
	End Cap (NPT Thread)	12490129		
5	End Cap O-Ring	14120001	NBR	1
6	Disc Cartridge (120 Mesh)	14010047	Glass reinforced PP	1
	Disc Cartridge (150 Mesh)	14010049		
7	Cartridge O-Ring	50010087	NBR	1
8	Barrel	12490007	Glass reinforced PP	1
9	3/4"x3/4" FXM Ball Valve	19070001	PP	1
10	SS Clamp (Long Handle)	14010060	SS 304	1