


Aquamic Excel

Micro Sprinkler (HT-211)



New

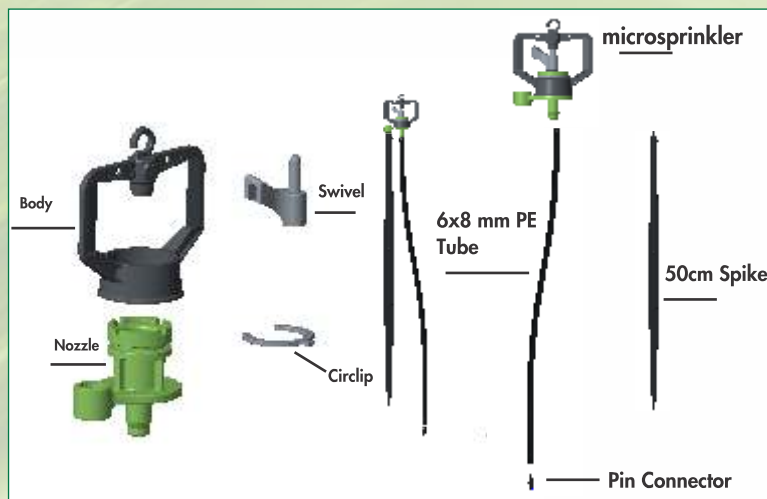

Features and Specifications

- Barbed type Connection.
- No dry patches due to body rotation, excellent distribution uniformity.
- Range of operating Pressure: 0.5 - 2.5kg/cm².
- Flow Rate Range: 82 - 225 LPH
- Recommended Spacing: 3x3m, 3.5 x 3.5m & 4x4m.
- Special material achieves high wear resistance and trouble free swivel rotation.
- 6x8mm PE tube for more water carrying capacity to run sprinkler at low pressure.
- UV & Chemical Resistant material.

Applications

- For overhead irrigation of vegetables, nurseries, flower beds, shrubs & landscape.
- For irrigation of widely spaced plants upto 4x4m spacing with different mounting options.



Specially designed Circlip for easy opening of microsprinkler for cleaning by the end user.

Specifications

Swivel Color	Pressure kg/cm ²	Yellow Nozzle (1.5mm)		Green Nozzle (1.85mm)		White Nozzle (2.1mm)	
		Flow (LPH)	Dia. (m)	Flow (LPH)	Dia. (m)	Flow (LPH)	Dia. (m)
Black	1	82	5.8	105	6.5	142	7.2
	1½	102	6.4	132	7.5	165	7.8
	2	115	7.0	155	7.8	188	8.2
	2½	125	7.4	170	8.2	208	8.8
	3	135	7.8	185	8.6	225	9

* Tested at 50cm height above ground.