

Double Union Long Handle Ball Valve

2"



HT - 66FFDU

Specially designed &
Approved in APMIP/TSMIP

Features

- Specially designed re-inforced handle with metal insert.
- It prevents breakage of handle in rough handling by farmers.
- **Most popular Union Ball Valve in AP/Telangana.**
- Pressure rating- PN-16.

Double Union & Flanged Ball Valves

1 1/2", 2 1/2" & 3"



HT - 67FFDU




HT - 68FL

Sizes Available


Size	Connections		
	Female x Female	Plain x Plain	Flanged
1 1/2"	HT-65FFDU	HT-65PPDU	N.A.
2"	HT-66FFDU	HT-66PPDU	N.A.
2 1/2"	HT-67FFDU	HT-67PPDU	HT-67FL
3"	HT-68FFDU	HT-68PPDU	HT-68FL

Double Union & Flanged BV Assembly Dimension

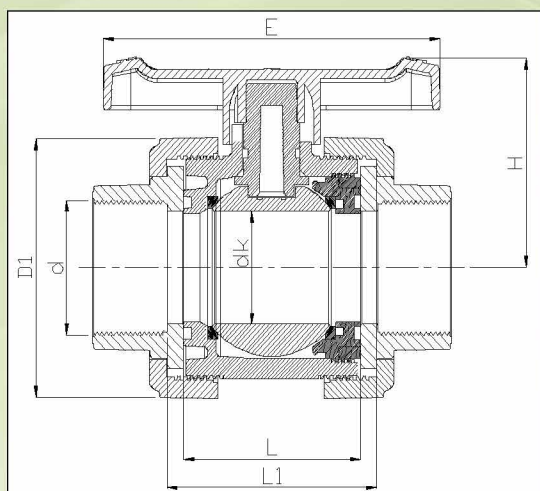

Double Union Ball Valve


Size			Dimension						
d	DN	DN	D1	E	dk	L	L1	H	Lt
mm	mm	inch							
44.846	40	1.5	94.4	121	39.4	76.6	89.6	88.3	148.8
56.656	50	2	116	149.9	49.5	88	104	97	175.4
72.22	65	2.5	131.6	162	59	108.4	122.8	106	186.7
84.92	80	3	176.8	198.3	76	140	156	139	213.8

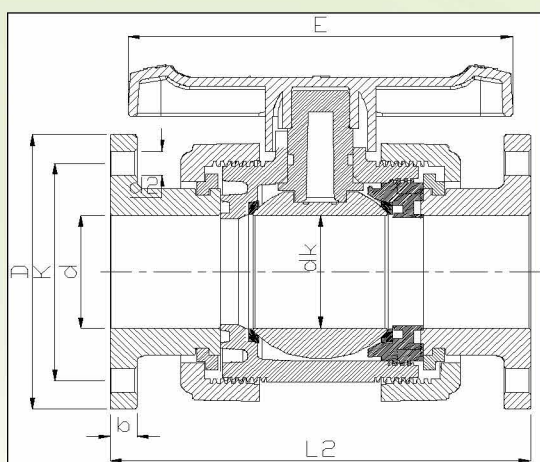

Flanged Ball Valve

Size			Dimension						
d	DN	DN	D	E	dk	d2	b	K	L2
mm	mm	inch							
59.7	65	2.5	164.4	162	59	16.3	15	126	214
76.2	80	3	184	198.3	76	15.9	15.7	145.2	275

Exploded View

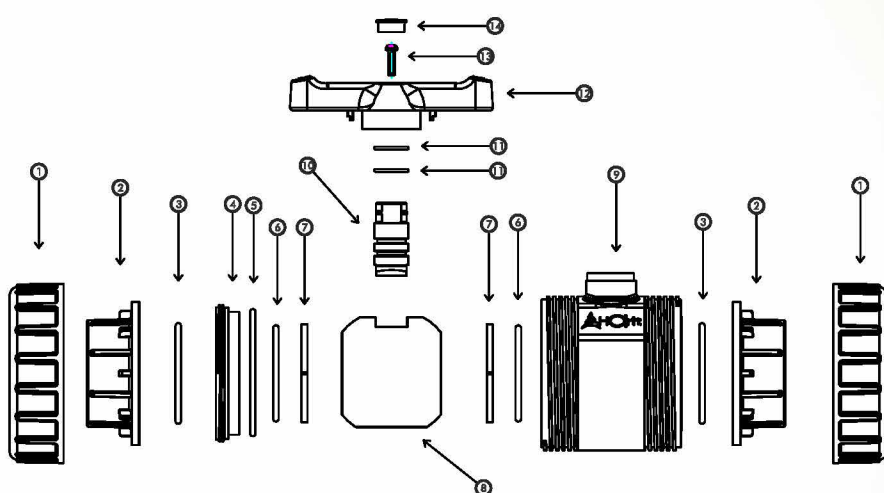

List of Spare Parts

Position	Description	Material
1	Ring For Socket	UPVC
2	Socket (Plain/Threaded)	UPVC
3	Bush Small 'O' Ring	NBR
4	Bush	UPVC
5	Bush Big 'O' Ring	NBR
6	Seal 'O' Ring	NBR
7	Seal	TPE
8	Ball	UPVC
9	Body	UPVC
10	Shaft	UPVC
11	Shaft 'O' Ring	NBR
12	Handle	PA6
13	Handle Screw	SS
14	Handle Insert (LOGO)	ABS