


Hybrid Butterfly Valve

2", 2½" & 3"

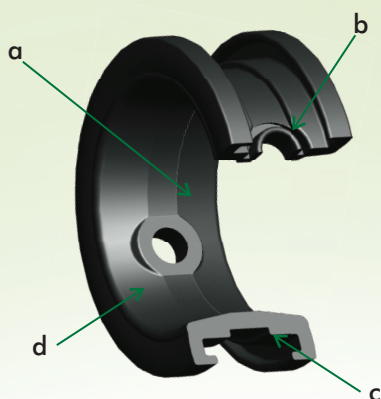

Approved in GGRC

Technical Specification

- Size: 50mm/ 2"- HT-81
65mm/ 2½"- HT-82
80mm/ 3"- HT-83
- Rating: PN10 (150 Psi)

Features

- Light Weight, easy to install.
- One Piece Body made of PVC-U.
- Disc designed ensuring low torque and low pressure loss.
- Suitable for piping in a limited space.
- **Rust Prevention**:- Main parts such as Disc, shaft and small parts such as bolting, washers are made of high graded stainless steel (SS304/316), for rust prevention.
- **Lock Plate** provided with throttling notches every 15° in balancing upto 90° or shut off service. The lever may be padlocked in any one of the notches position.

EPDM Rubber Seal

- Wide disc seating contact for good sealing performance.
- Dual shaft seal bearing for stabilized sealing function.
- Excellent gripping of rubber seal to avoid operating problems such as distortion, deformation and skidding caused by line pressure and friction with metal.
- Gasketless flange sealing contact for easy valve mounting.

Dimensions (mm)

Size	d	D	H1	H2	H	L	C
2"	50	117	130	62.4	156	198.5	120.8
2½"	65	112	134	88	161	198.5	137.5
3"	80	128	140.5	91	182	198.5	155.5

