

Single Union PVC Ball Valves

$\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ ", 2", 2 $\frac{1}{2}$ ", 3"

New



HT - 64FFSU



HT - 65FMSU



HT - 66FFSU



HT - 68PSU


Features

- Regular handle for use in complete header assembly unit.
- Pressure Rating- PN-10 for upto 2" Ball valves
PN-8 for 2 $\frac{1}{2}$ " & 3"
- Specially designed Long Handle for ease of operation once installed in system.

Sizes Available

Size	Threaded Connections		Solvent Connections
	Female x Female	Female x Male	Plain x Plain
$\frac{3}{4}$ "	HT-62FFSU	HT-62FMSU	HT-62PSU
1"	HT-63FFSU	HT-63FMSU	HT-63PSU
1 $\frac{1}{4}$ "	HT-64FFSU	HT-64FMSU	HT-64PSU
1 $\frac{1}{2}$ "	HT-65FFSU	HT-65FMSU	HT-65PSU
2"	HT-66FFSU	HT-66FMSU	HT-66PSU
2 $\frac{1}{2}$ "	HT-67FFSU	HT-67FMSU	HT-67PSU
3"	HT-68FFSU	HT-68FMSU	HT-68PSU

Exploded View

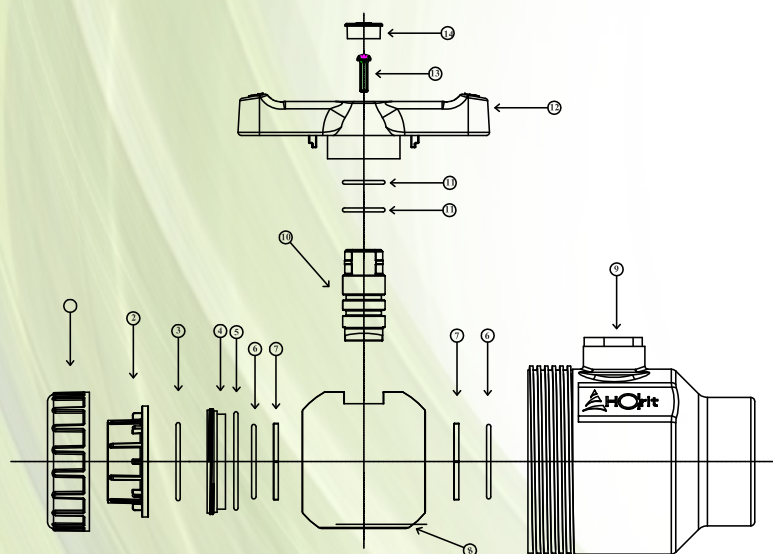

List of Spare Parts

Position	Description	Material
1	Ring	UPVC
2	Socket	UPVC
3	Bush Small 'O' Ring	NBR
4	Bush	UPVC
5	Bush Big 'O' Ring	NBR
6	Seal 'O' Ring	NBR
7	Seal	TPE
8	Ball	UPVC
9	Body	UPVC
10	Shaft	UPVC
11	Shaft 'O' Ring	NBR
12	Handle	Pa6
13	Handle Screw	SS
14	Handle insert (Logo)	ABS