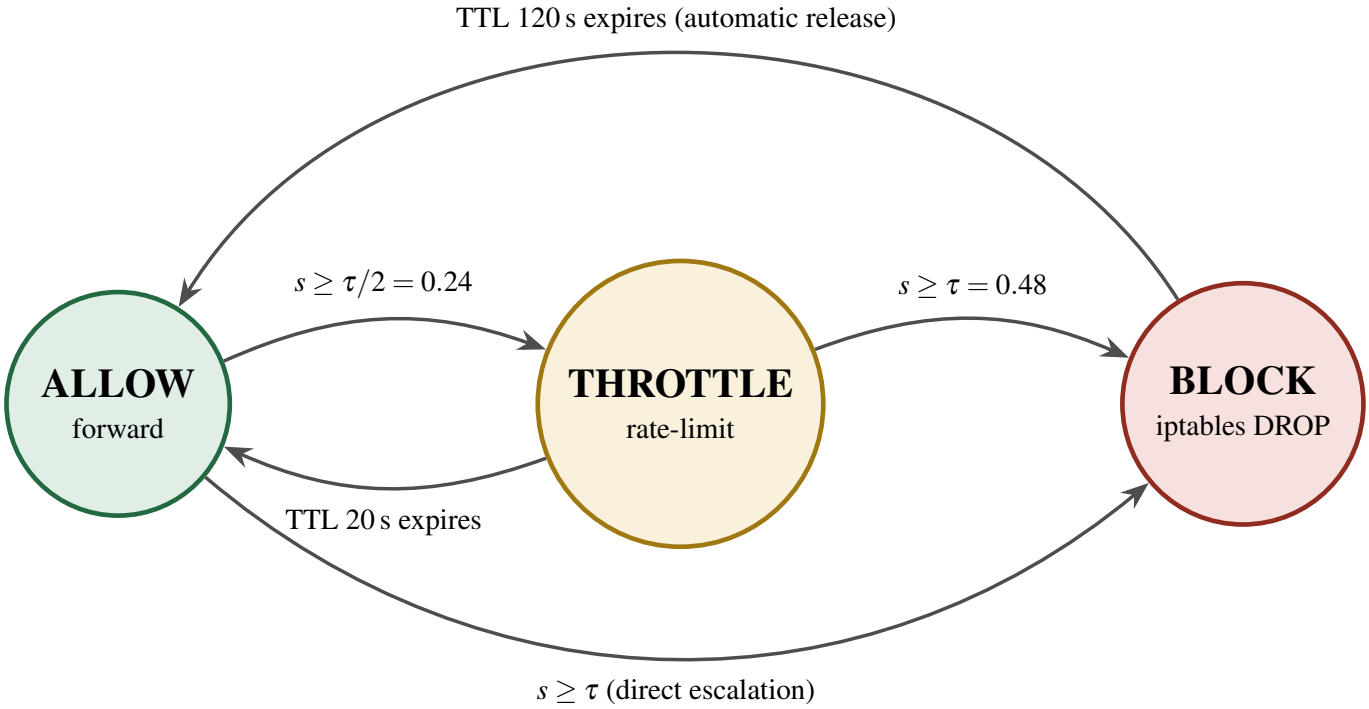


Safety rails: SSH client, loopback, broadcast and operator-protected IPs never leave ALLOW; direction gating stops the Pi's own replies, RSTs and ICMP errors from triggering mitigation.