

6

5

4

3




2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/11/10	

APPROVED: _____

DATE: _____ TITLE: _____

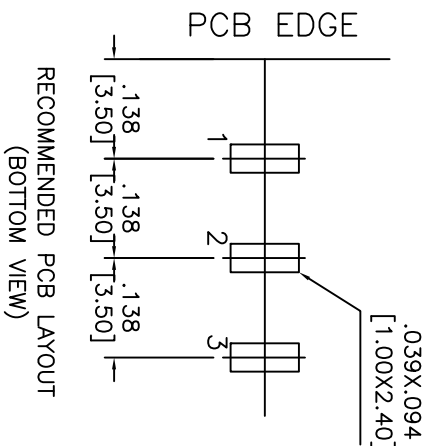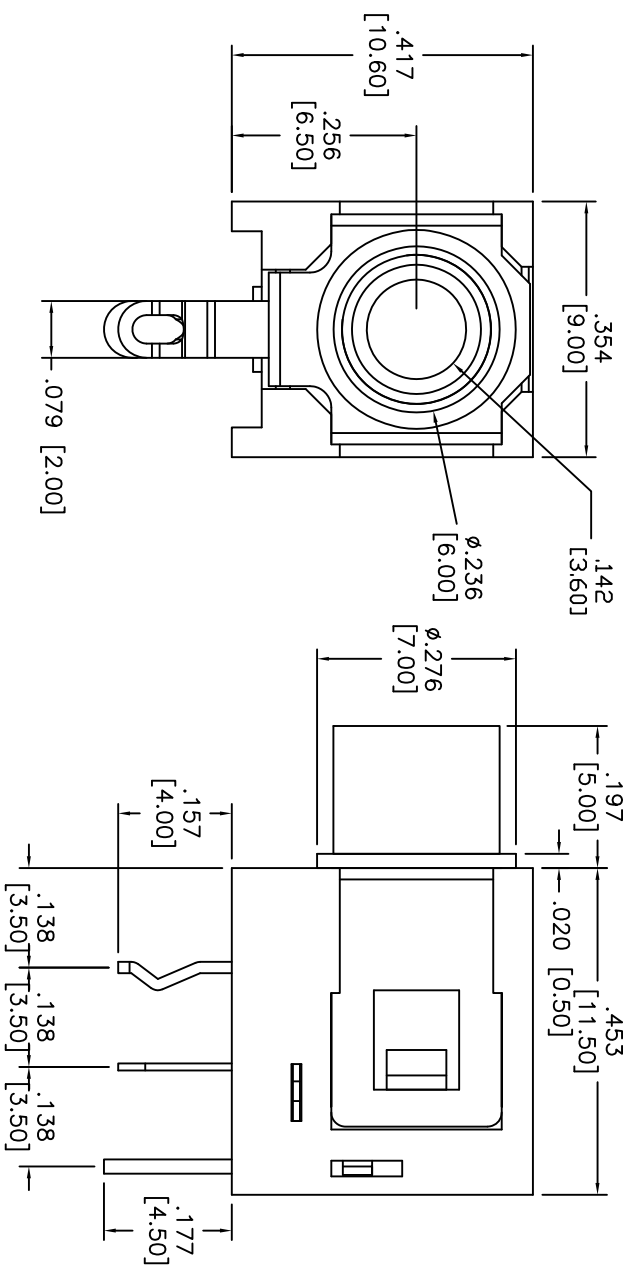

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy, Tin plated.

Electrical:

Rated Voltage & Current: DC 12V, 2A max; AC100V, 1A max.

Contact resistance: 30 mohms max.

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

3.5MM STEREO PHONE JACK, 3PIN

TITLE

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES

.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

APPROVALS

DRAWN	DR	5/11/10
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	ASJ-125-3	-
REF: S00095T	SCALE: NTS	SHEET 1 OF 1

A

B

C

D