

SUBMITTAL TRANSMITTAL — No. 26-01 REV 1

JCS Construction Solutions LLC | Lic# JCSCOCS770NC | Subcontract 26-008-004

Project:	Mountain View Middle School — Administrative Office Upgrades	Date:	07/20/2026
To:	Peak Construction (dba Peak Drywall Solutions)	Revision:	Rev 1 (responds to 26SUB-01)
From:	JCS Construction Solutions LLC — Justin Orellana	Reviewer:	Hargis — reviewed 07/17/2026
Division:	26 00 00 — Electrical	Action Req.:	APPROVAL

PURPOSE AND SCOPE OF THIS REVISION

This revision responds to comment sheet 26SUB-01 dated 07/17/2026. The package has been **reorganized by specification section with bookmarks** as directed, additional sections have been added, and items identified as outside the project scope have been removed. **Section 26 51 00 Lighting is intentionally excluded from this revision** and will follow as a separate package once product data for the specified fixtures is assembled. JCS requests that review of the sections below proceed independently of the lighting package to protect the construction schedule.

RESPONSE TO REVIEW COMMENTS

Spec Section	Prior Action	Reviewer Comment	JCS Response in This Revision
26 05 00 General Provisions	RR	Submittal not organized per spec section and out of order. Provide bookmarks for spec sections, submit additional sections noted, revise per comments.	Package fully reorganized by spec section in numerical order. PDF bookmarks added for each section. Additional sections added as noted below. Index page included.
26 05 19 Wire and Cables	SUB	Product data required.	Included — building wire product data, sizes #12 through #8 CU THHN.
26 05 21 Metal Clad Cables	SUB	Product data required.	Included — MC cable product data.
26 05 29 Supporting Devices	NE	No exceptions taken.	Approved in prior review. Included unchanged for completeness — no re-review requested.
26 05 33 Raceway Systems	SUB	Raceways and surface metal raceways material is not included in the submittal.	ADDED — EMT conduit, compression connectors and couplings, one-hole straps, and surface metal raceway product data now included.
26 05 34 Outlet Boxes	SUB	Product data required.	Included — outlet box, device box, and mud/plaster ring product data.
26 09 23 Lighting and Receptacle Controls	SUB	Product data and shop drawings required.	Included — control device product data and shop drawings for occupancy sensors, photo sensors, dimming stations, and plug-load controllers.
26 27 26 Wiring Devices	RR	Incomplete materials. Does not include controlled receptacles. Includes floor box device which is not part of the project. Remove and revise.	Controlled receptacles ADDED and identified by device type per plan flag notes. Floor box device and associated cover plate REMOVED per comment. Device schedule added cross-referencing each device to its plan designation.
26 51 00 Lighting	RR	All fixtures (Juno, Satco, RAB) do not align with contract documents. Bug eye exit sign not in scope. Remove unapproved substitutes and submit data aligning with contract documents.	EXCLUDED FROM THIS REVISION. All previously proposed fixtures withdrawn. Product data for the specified fixtures is being assembled and will be submitted as a separate package. Bug eye exit sign withdrawn.

NOTES

- Lighting package separation: JCS requests the sections above be reviewed and released independently of Section 26 51 00. Material in these sections is required for work currently in progress; holding them for the lighting package would delay procurement of items unrelated to the fixture comments.
- Floor box: removed from this submittal per the reviewer comment that the floor box device is not part of the project. JCS has separately requested written confirmation from the Contractor as to whether this also constitutes design direction regarding existing floor outlets discovered in the field, which are the subject of an open RFI and pending change order.

- 3. Lighting fixture schedule impact: the specified fixtures are noted by the reviewer as available on a 15-day quick ship. That duration begins upon approval of the lighting resubmittal. JCS has provided the Contractor separate written notice of the resulting schedule exposure to the 8/7 trim-out start.
- 4. Wattage and battery backup options: JCS notes the reviewer's allowance that slight wattage or battery backup option changes are acceptable to accommodate quick ship, and will apply that latitude only where required to meet the schedule, with any such selection identified in the lighting package.

Submitted by:	Justin Orellana — JCS Construction Solutions LLC	Reviewed by GC:	
Date:	07/20/2026	Date:	
		Design action:	Approved / Approved as Noted / Revise and Resubmit

SECTION 26 05 19 — WIRE AND CABLES

Submittal 26-01 Rev 1 | MVMS Admin TI | Responds to Hargis 26SUB-01 (07/17/2026)

Response to review comment

Product data required — included: building wire product data, sizes #12 through #8 CU THHN/THWN-2, 600V.

Contents of this section

- Copper building wire, THHN/THWN-2, #12 AWG through #8 AWG, 600V — manufacturer product data follows.

SECTION 26 05 21 — METAL CLAD CABLES

Submittal 26-01 Rev 1 | MVMS Admin TI | Responds to Hargis 26SUB-01 (07/17/2026)

Response to review comment

Product data required — included: MC cable product data.

Contents of this section

- Metal clad cable, copper conductors, 14-2 and 12-2 w/ ground — manufacturer product data follows.

SECTION 26 05 29 — SUPPORTING DEVICES

Submittal 26-01 Rev 1 | MVMS Admin TI | Responds to Hargis 26SUB-01 (07/17/2026)

Response to review comment

No exceptions taken in prior review. Included unchanged for completeness — no re-review requested.

Contents of this section

- J-hook cable supports, pre-galvanized steel (Minerallac J100) — manufacturer product data follows.

J100

1 J-Hook Cable Supprt PG

UPC: 78461004834
 UNSPSC: 39121701
 Standard Qty: 50
 Master Carton Qty: 50
 Country of Origin: CHINA
 1" J-Hook, 1/4" Mounting Hole, Includes Steel Retaining Pin, Pre-Galvanized



Product Attributes

Brand Name	Minerallac
Type	Cable Support
Application	Provides support without stress to sensitive voice/data cables.
Cable Size	Accommodates Cat 5, Cat 6, fiber-optic and interduct cables.
Material	Pre-Galvanized Steel
Color	Silver
Mounting	1/4" hole
Construction	Stamped

Compliance Information

Buy America Act Compliant: No
 Buy American Act Compliant: No
 RoHS Compliant: No
 UL Listed: No
 UL Code:

Proposition 65



WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and reproductive harm. For more information go to www.P65Warnings.ca.gov.

Minerallac Company

Tel: 800-927-3293
 Fax: 800-824-8942
www.minerallac.com

WARRANTY DISCLAIMER The information, data and recommendations contained herein may not be all inclusive or specific to your situation, and should only be used as a guide. The information is furnished upon the condition that the person receiving it shall make his/her own determination of the suitability of the product for his/her particular use and on condition that they assume the risk of the use thereof.

With respect to this publication and the product related thereto, except otherwise expressly provided by Manufacturer in writing, MANUFACTURER MAKES NO EXPRESS OR IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER EXPRESS OR IMPLIED WARRANTY.

Remedy/Liability Limits The exclusive remedy for losses or damages resulting from this publication or the related product (including claims based on contract, negligence, strict liability or other legal theories) shall be limited to, at Manufacturer's sole election, one of the following: 1. Refund of purchase price paid by buyer or user for product bought, or 2. Replacement of amount of product used.

Manufacturer shall not be liable for losses or damages resulting from use of this publication or handling or use of this product, IN NO CASE SHALL MANUFACTURER BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES OR LOSSES, INCLUDING WITHOUT LIMIT, HEALTH RELATED DAMAGES OR INJURIES, OR LOST PROFITS.

The terms of this Warranty Disclaimer and Remedy/Liability Limits cannot be varied by any written or verbal statements or agreements. No employee or sales agent of Manufacturer or the seller is authorized to vary or exceed the terms of this Warranty Disclaimer or Limitation of Remedies in any manner.

SECTION 26 05 33 — RACEWAY SYSTEMS

Submittal 26-01 Rev 1 | MVMS Admin TI | Responds to Hargis 26SUB-01 (07/17/2026)

Response to review comment

Reviewer comment: raceways and surface metal raceways material not included. ADDED in this revision: EMT conduit, compression connectors and couplings (standard and rain-tight), one-hole straps, and surface metal raceway product data.

Contents of this section

- EMT conduit, hot-galvanized steel, UL 797 / ANSI C80.3 — manufacturer product data follows.
- EMT steel compression connectors and couplings, 1/2"–4", UL 514B, concrete-tight (American Fittings EC series).
- EMT steel rain-tight compression connectors and couplings (American Fittings ECRT series).
- EMT one-hole steel straps, 1/2"–4" (American Fittings CSE series).
- Surface metal raceway, one-piece steel, UL 5, NEC Article 386 — manufacturer product data follows.

Electrical Metallic Tubing (EMT) and True Color™ EMT



A PART OF **atkore**
INTERNATIONAL

E-Z Pull® EMT

- Hot galvanized steel using patented inline Flo-Coat® process for long lasting exterior protection
- E-Z Pull interior coating provides a smooth raceway for fast, easier wire-pulling
- Excellent mechanical protection for conductors
- Ductility for faster and easier bending
- Optimal EMI shielding characteristics
- Listed to Underwriters Laboratories Safety Standard UL 797
- Manufactured in accordance with ANSI C80.3
- Available in sizes 1/2 (16) - 4 (103)

True Color™ EMT

- All the benefits of E-Z Pull EMT
- Instant identification of multiple circuits
- Fire Alarm® Red EMT
- Healthcare Green EMT
- Data Com Blue EMT
- Available in 8 colors
- Available in sizes 1/2 (16) - 4 (103)

Quality Electrical Metallic Tubing



Identify Important Circuits Instantly!



True Color™ Applications

Black EMT

- Blends in dark colored areas

Fire Alarm® EMT

- Emergency circuits
- Fire alarm and Security systems

Orange EMT

- Construction/research areas
- Fiber optic systems
- Auto repair/maintenance

Yellow EMT

- High voltage wiring
- Caution areas
- Special equipment

Green EMT

- Hospital and healthcare areas
- Nurse call stations
- Critical circuits

Blue EMT

- Low voltage wiring
- Data com/video
- Network security

Purple EMT

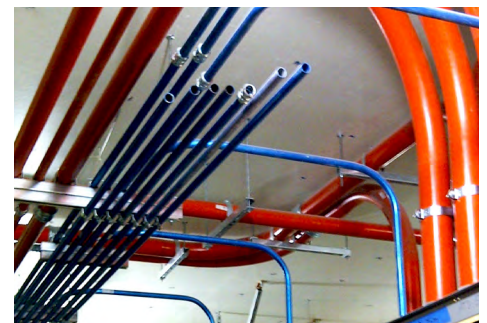
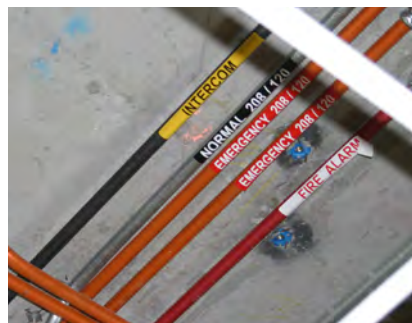
- Specialty wiring systems
- Security systems

White EMT

- Blends in light colored areas

Silver EMT

- Standard Use
- Contemporary architecture



Project Information

Company Name: _____
Address: _____
City: _____
State & Zip: _____
Phone: _____
Project Name: _____
City: _____
State: _____

Electrical Metallic Tubing (EMT) and True Color™ EMT



A PART OF **atkore**
INTERNATIONAL

FEATURES & SPECIFICATIONS

Manufactured for Long Life

Allied Tube & Conduit® EMT is precision manufactured from high grade mild strip steel for exceptional durability and long-lasting life. Allied EMT is hot galvanized using a patented inline Flo-Coat® process. This process combines zinc, a conversion coating, and a clear organic polymer topcoat to form a triple layer of protection against corrosion and abrasion.

E-Z Pull® EMT combines strength with ductility, providing easy bending, cutting and joining while resisting flattening, kinking and splitting. Available in sizes 1/2 (16) - 4 (103).

Coatings

Allied's EMT (Electrical Metallic Tubing) has a special low friction ID coating called E-Z Pull that greatly improves the slip properties between conduit and wire. With E-Z Pull EMT, wire pulls through the EMT smoothly and easily, making installation easier and faster.

EMI Shielding

Allied EMT is very effective in reducing electromagnetic field levels for encased power distribution circuits, shielding computers and other sensitive electronic equipment from the effects of electromagnetic interference. For more information on EMT shielding, visit www.alliedeg.com to obtain the **GEMI** (Grounding and Electro-Magnetic Interference) software analysis program.

Electrical Metallic Tubing (EMT) and True Color™ EMT

Listed to Underwriters Laboratories Safety Standard UL 797
Manufactured in accordance with ANSI C80.3



Trade Size	Metric Designator	Outside Diameter ¹		Nominal Wall Thickness ²		Approximate Weight Per 100 Ft. (30.5M)		Red and Galvanized Master Bundle Quantity		True Color** Bundle Qty.	
		in	mm	in	mm	lb	kg	ft	m	ft	m
1/2	16	0.706	17.93	0.042	1.07	30	13.6	7000	2135	3500	1066.8
3/4	21	0.922	23.42	0.049	1.24	46	20.9	5000	1525	2500	762.0
1	27	1.163	29.54	0.057	1.45	67	30.4	3000	915	1500*	457.2
1-1/4	35	1.510	38.35	0.065	1.65	101	45.8	2000	610	2000	609.6
1-1/2	41	1.740	44.20	0.065	1.65	116	52.6	1500	457.5	1500	457.2
2	53	2.197	55.80	0.065	1.65	148	67.1	1200	366.0	1200	365.7
2-1/2	63	2.875	73.03	0.072	1.83	216	98.0	610	186.1	610	185.9
3	78	3.500	88.90	0.072	1.83	263	119.3	510	155.6	510	155.4
3-1/2	91	4.000	101.60	0.083	2.11	349	158.3	370	112.9	370	112.7
4	103	4.500	114.30	0.083	2.11	393	178.3	300	91.5	300	91.5

¹Outside diameter tolerances: +/- .005 in. (.13mm) for trade sizes 1/2 (16mm) through 2 (53mm);
+/- .010 in. (.25mm) for trade sizes 2-1/2 (63mm);
+/- .015 in. (.38mm) for trade size 3 (78mm);
+/- .020 in. (.51mm) for trade sizes 3-1/2 (91mm) and 4 (103mm).

*Blue trade size 1 master bundle size: 3000 ft / 915 m

** Other Color Trade Sizes 2 - 4 are available thru special order

NOTE: Length = 10 ft. (3.05m) with a tolerance of +/- .25 in. (6.35 mm)


Electrical Metallic Tubing (EMT) Elbows

EMT 90° Elbows

Listed to Underwriters Laboratories Safety Standard UL 797
Manufactured in accordance with ANSI C80.3



Trade Size	Metric Designator	Radius (A) ¹		Offset (B) ²		Straight (D) ¹		Approximate Weight Per 100 Pieces		Standard Package
		in	mm	in	mm	in	mm	lb	kg	
1/2	16	4	102	5 7/8	149	1 1/2	38	25	11.3	25
3/4	21	4 1/2	114	7	178	1 1/2	38	46	20.9	50
1	27	5 3/4	146	8 3/4	222	1 7/8	48	84	38.1	25
1 1/4	35	7 1/4	184	10 1/8	257	2	51	144	65.3	20
1 1/2	41	8 1/4	210	11 3/4	298	2	51	193	87.5	15
2	53	9 1/2	241	14	356	2	51	296	134.3	10
2 1/2	63	10 1/2	267	16 1/4	413	3	76	504	228.6	1
3	78	13	330	18 3/4	476	3 1/8	79	701	318.0	1
3 1/2	91	15	381	21 1/4	540	3 1/4	83	1047	474.9	1
4	103	16	406	23 3/8	594	3 3/8	86	1310	594.2	1



¹Minimum requirement as per UL Standard

²Dimensions and weights are approximate

Sizes 2-1/2 (63) and larger shipped in palletized cartons or bulk.


Also available in the following Degrees (60°, 45°, 30°, 22-1/2°, 15° & 11-1/4°)

EMT 45° Elbows

Listed to Underwriters Laboratories Safety Standard UL 797
Manufactured in accordance with ANSI C80.3



Trade Size	Metric Designator	Radius (A) ¹		Offset (B) ²		Offset (C) ²		Straight (D) ¹		Approximate Weight Per 100 Pieces		Standard Package
		in	mm	in	mm	in	mm	in	mm	lb	kg	
1/2	16	4	102	6 1/8	156	2 1/2	64	1 1/2	38	18	8.2	25
3/4	21	4 1/2	114	7 3/8	187	3 1/8	79	1 1/2	38	33	15.0	50
1	27	5 3/4	146	8 3/4	222	3 5/8	92	1 7/8	48	56	25.4	25
1 1/4	35	7 1/4	184	10 1/8	257	4 1/8	105	2	51	97	44.0	20
1 1/2	41	8 1/4	210	13 1/8	333	5 3/8	137	2	51	145	65.8	15
2	53	9 1/2	241	13 1/8	333	5 1/2	140	2	51	185	83.9	10
2 1/2	63	10 1/2	267	17 1/2	445	7 1/4	184	3	76	360	163.3	1
3	78	13	330	17 1/2	445	7 1/4	184	3 1/8	79	438	198.7	1
3 1/2	91	15	381	26 1/8	664	10 7/8	276	3 1/4	83	873	396.0	1
4	103	16	406	26 1/4	667	10 7/8	276	3 3/8	86	983	445.9	1



¹Minimum requirement as per UL Standard

²Dimensions and weights are approximate

Sizes 2-1/2 (63) and larger shipped in palletized cartons or bulk.

Also available in the following Degrees (90°, 60°, 30°, 22-1/2°, 15° & 11-1/4°)

NOTE: Special orders are non-cancelable, non-returnable and non-refundable


Electrical Metallic Tubing (EMT) Elbows

EMT Large Radius 90° Elbows

Listed to Underwriters Laboratories Safety Standard UL 797
Manufactured in accordance with ANSI C80.3



Trade Size	Metric Designator	Radius (A)		Offset (B) ²		Straight (D) ²		Approximate Weight Per 100 Pieces	
		in	mm	in	mm	in	mm	lb	kg
1	27	12	305	20 5/8	524	8 5/8	219	201	91.2
1	27	15	381	24 1/4	616	9 1/4	235	235	106.6
1	27	18	457	27 7/8	708	9 7/8	251	268	121.6
1	27	24	610	34 5/8	879	10 5/8	270	329	149.2
1	27	30	762	41	1041	11	279	385	174.6
1	27	36	914	46 3/4	1187	10 3/4	273	436	197.8
1	27	42	1067	54	1372	12	305	503	228.2
1	27	48	1219	60 1/4	1530	12 1/4	311	558	253.1
1 1/4	35	12	305	20 5/8	524	8 5/8	219	303	137.4
1 1/4	35	15	381	24 1/4	616	9 1/4	235	354	160.6
1 1/4	35	18	457	27 7/8	708	9 7/8	251	404	183.3
1 1/4	35	24	610	34 5/8	879	10 5/8	270	497	225.4
1 1/4	35	30	762	41	1041	11	279	581	263.5
1 1/4	35	36	914	46 3/4	1187	10 3/4	273	657	298.0
1 1/4	35	42	1067	54	1372	12	305	758	343.8
1 1/4	35	48	1219	60 1/4	1530	12 1/4	311	842	381.9
1 1/2	41	15	381	24 1/4	616	9 1/4	235	406	184.2
1 1/2	41	18	457	27 7/8	708	9 7/8	251	464	210.5
1 1/2	41	24	610	34 5/8	879	10 5/8	270	570	258.6
1 1/2	41	30	762	41	1041	11	279	667	302.6
1 1/2	41	36	914	46 3/4	1187	10 3/4	273	754	342.0
1 1/2	41	42	1067	54	1372	12	305	870	394.6
1 1/2	41	48	1219	60 1/4	1530	12 1/4	311	967	438.6
2	53	15	381	24 1/4	616	9 1/4	235	518	235.0
2	53	18	457	27 7/8	708	9 7/8	251	592	268.5
2	53	24	610	34 5/8	879	10 5/8	270	728	330.2
2	53	30	762	41	1041	11	279	851	386.0
2	53	36	914	46 3/4	1187	10 3/4	273	962	436.4
2	53	42	1067	54	1372	12	305	1110	503.5
2	53	48	1219	60 1/4	1530	12 1/4	311	1233	559.3
2 1/2	63	18	457	27 7/8	708	9 7/8	251	864	391.9
2 1/2	63	24	610	34 5/8	879	10 5/8	270	1062	481.7
2 1/2	63	30	762	41	1041	11	279	1242	563.4
2 1/2	63	36	914	46 3/4	1187	10 3/4	273	1404	636.9
2 1/2	63	42	1067	54	1372	12	305	1620	734.8
2 1/2	63	48	1219	60 1/4	1530	12 1/4	311	1800	816.5



²For information only, not a requirement as per UL Standard
 Sizes 2-1/2 (63) and larger shipped in palletized cartons or bulk.
 Also available in the following Degrees (60°, 45°, 30°, 22-1/2°, 15° & 11-1/4°)

Chart continued on the next page

NOTE: Special orders are non-cancelable, non-returnable and non-refundable


Electrical Metallic Tubing (EMT) Elbows

EMT Large Radius 90° Elbows (continued)

Listed to Underwriters Laboratories Safety Standard UL 797
Manufactured in accordance with ANSI C80.3



Trade Size	Metric Designator	Radius (A)		Offset (B) ²		Straight (D) ²		Approximate Weight Per 100 Pieces	
		in	mm	in	mm	in	mm	lb	kg
3	78	15	381	24 1/4	616	9 1/4	235	921	417.8
3	78	18	457	27 7/8	708	9 7/8	251	1052	477.2
3	78	24	610	34 5/8	879	10 5/8	270	1293	586.5
3	78	30	762	41	1041	11	279	1512	685.8
3	78	36	914	46 3/4	1187	10 3/4	273	1710	775.7
3	78	42	1067	54	1372	12	305	1973	895.0
3	78	48	1219	60 1/4	1530	12 1/4	311	2192	994.3
3 1/2	91	18	457	27 7/8	708	9 7/8	251	1396	633.2
3 1/2	91	24	610	34 5/8	879	10 5/8	270	1716	778.4
3 1/2	91	30	762	41	1041	11	279	2007	910.4
3 1/2	91	36	914	46 3/4	1187	10 3/4	273	2269	1029.2
3 1/2	91	42	1067	54	1372	12	305	2618	1187.5
3 1/2	91	48	1219	60 1/4	1530	12 1/4	311	2908	1319.1
4	103	24	610	34 5/8	879	10 5/8	270	1932	876.4
4	103	30	762	41	1041	11	279	2260	1025.1
4	103	36	914	46 3/4	1187	10 3/4	273	2555	1158.9
4	103	42	1067	54	1372	12	305	2948	1337.2
4	103	48	1219	60 1/4	1530	12 1/4	311	3275	1485.5



²For information only, not a requirement as per UL Standard

Sizes 2-1/2 (63) and larger shipped in palletized cartons or bulk.

Also available in the following Degrees (60°, 45°, 30°, 22-1/2°, 15° & 11-1/4°)

NOTE: Special orders are non-cancelable, non-returnable and non-refundable

EMT Steel Compression Connector

Size Range: 1/2" - 4" 2 1/2" thru 4" are UL Listed & Approved for Use on Both EMT & Rigid

Product Series: EC - EMT Compression Connector

Material: Solid Alloy Steel Construction

Zinc Plated with a Chromate Finish **

Made in the USA

Features:

Precision Machined Cut Threads

UL Rated Concrete Tight

Full FLAT HEX Surface with
EZ Torque Steel Compression Nut
Torques Tight & Right

Twice the Strength and Durability of ALL Die Cast and Malleable Products

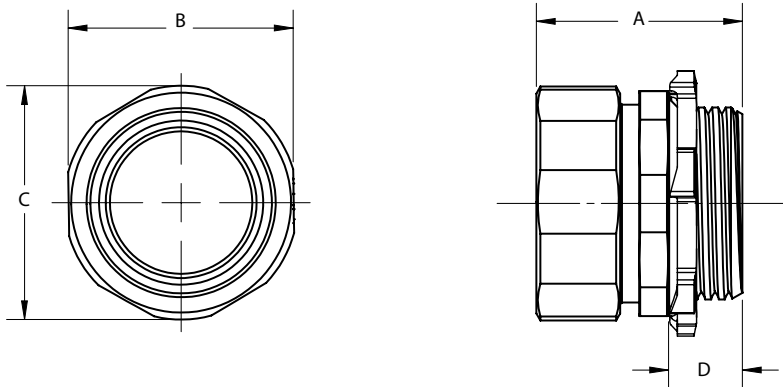
Industrial SPEC-grade



Compression Connector
Above with Insulated Bushing



Furnished with a UL Listed
Steel Locknut



Cat #	TRADE SIZE	A LENGTH	B HEX	C DIAMETER	D THREAD LENGTH	Wt. Per/C
EC750US	1/2"	1-3/16"	15/16"	1"	3/8"	8
EC751US	3/4"	1-1/4"	1-3/16"	1-1/4"	7/16"	12
EC752US	1"	1-1/2"	1-7/16"	1-1/2"	7/16"	19
EC753US	1-1/4"	1-7/8"	1-13/16"	1-7/8"	1/2"	30
EC754US	1-1/2"	2-3/16"	2-1/16"	2-3/16"	9/16"	46
EC755US	2"	2-7/8"	2-9/16"	2-7/8"	5/8"	55
ERC250CONN (1)	2-1/2"	3-7/16"	3-1/4"	3-7/16"	1"	120
ERC300CONN (1)	3"	4"	3-15/16"	4"	1"	165
ERC350CONN (1)	3-1/2"	4-9/16"	4-7/16"	4-9/16"	1"	201
ERC400CONN (1)	4"	5-1/8"	4-15/16"	5-1/8"	1"	237

(1) 2 1/2" to 4" UL Listed and Rated for Rigid Conduit. Product is stamped accordingly.

Compliances:

Certified Made in the USA

UL 514B, 467

Compression Fittings Concrete Tight

Suitable for Direct Burial ***

NEMA Standard FB1

Federal Standard A-A-50553

Certified for MIL-STD 810 Sinusoidal Vibrations

CSA Standard: C22.2 No. 18F

RoHS Compliant

REACH Compliant

CA Prop 65 Compliant

UNSPSC 39121434



Available OPTIONS:

Factory Installed 105° UL Rating Insulated Bushing-
For this Option, Add Suffix B to Above Cat Number

RainTight Configuration - "RT series" See Catalog Page

** Galvanized Plating - Option

For this Option, Add Suffix "G" to Above Cat Number

Color Coded Painted (powder coated) Fittings- See Catalog Page

*** Rain Tight Series Recommended for
Direct Burial Requirements

EMT Steel Compression Coupling

Size Range: 1/2" - 4" 2 1/2" thru 4" are UL Listed & Approved for Use on Both EMT & Rigid

Product Series: EC - EMT Compression Coupling

Material: Solid Alloy Steel Construction

Zinc Plated with a Chromate Finish **

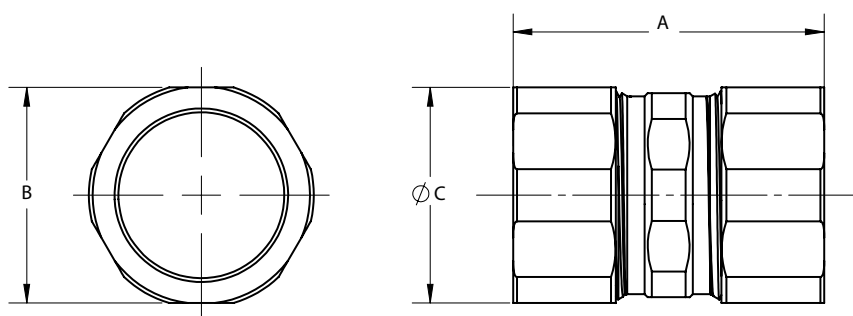
Made in the USA

Features:

Precision Machined Cut Threads

UL Rated Concrete Tight

Twice the Strength and Durability of ALL Die Cast and Malleable Products



Industrial SPEC-grade



Compression Coupling



Full FLAT HEX Surface with
EZ Torque Steel Compression Nuts
Torques Tight & Right

CAT #	TRADE SIZE	A LENGTH	B HEX	C DIAMETER	Wt. Per/C
EC760US	1/2"	1-3/8"	15/16"	1"	9
EC761US	3/4"	1-9/16"	1-3/16"	1-1/4"	13
EC762US	1"	1-5/8"	1-7/16"	1-1/2"	18
EC763US	1-1/4"	2"	1-13/16"	1-15/16"	29
EC764US	1-1/2"	2-1/4"	2-1/16"	2-3/16"	42
EC765US	2"	2-3/8"	2-9/16"	2-11/16"	61
ERC250CPLG (1)	2-1/2"	3-13/16"	3-1/4"	3-7/16"	127
ERC300CPLG (1)	3"	3-15/16"	3-15/16"	4"	167
ERC350CPLG (1)	3-1/2"	3-15/16"	4-7/16"	4-9/16"	204
ERC400CPLG (1)	4"	4"	4-15/16"	5-1/8"	235

(1) 2 1/2" to 4" UL Listed and Rated for Rigid Conduit. Product is stamped accordingly.

Compliances:

Certified Made in the USA

UL 514B, 467

Compression Fittings Concrete Tight

Suitable for Direct Burial ***

NEMA Standard FB1

Federal Standard A-A-50553

Certified for MIL-STD 810 Sinusoidal Vibrations

CSA Standard: C22.2 No. 18F

RoHS Compliant

REACH Compliant

CA Prop 65 Compliant

UNSPSC 39121434



Available OPTIONS:

RainTight Configuration - "RT series" See Catalog Page

** Galvanized Plating - Option

For this Option, Add Suffix "G" to Above Cat Number

Color Coded Painted (powder coated) Fittings - See Catalog Page

*** Rain Tight Series Recommended for

Direct Burial Requirements

EMT Steel Rain Tight Connectors

Size Range: 1/2" - 4" 2 1/2" thru 4" are UL Listed & Approved for Use on Both EMT & Rigid

Product Series: ECRT EMT Rain Tight Compression Connector

Material: Solid Alloy Steel Construction

Zinc Plated with Chromate Finish **

Made in the USA

Features:

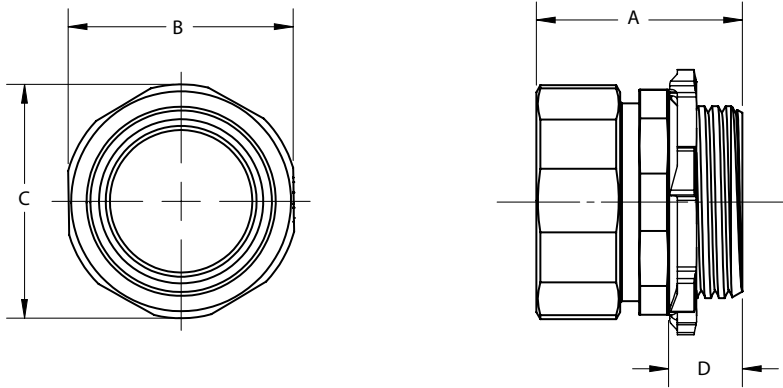
Precision Machined Cut Threads

AMFICO **EZ Torque** Solid Steel Compression Nut

Rain Tight Nuts Plated Gold Tone

UL Rated Concrete Tight

Twice the Strength and Durability of ALL Die Cast and Malleable Products



Compression Nut Plated Gold Tone for
EZ Inspection and Identification

Guaranteed Rain Tight

Full FLAT HEX Surface for
EZ Torque Steel Compression Nut
Torques Tight & Right

Industrial SPEC-grade



Rain Tight Compression Connector
Above Shown with Optional Insulated Bushing



Furnished with UL Listed
Steel Locknut and
Rain Tight Sealing Ring

Cat #	TRADE SIZE	A LENGTH	B HEX	C DIAMETER	D THREAD LENGTH	Wt. Per/C
EC750US RT	1/2"	1-3/16"	15/16"	1"	3/8"	8
EC751US RT	3/4"	1-1/4"	1-3/16"	1-1/4"	7/16"	12
EC752US RT	1"	1-1/2"	1-7/16"	1-1/2"	7/16"	19
EC753US RT	1-1/4"	1-7/8"	1-13/16"	1-7/8"	1/2"	30
EC754US RT	1-1/2"	2-3/16"	2-1/16"	2-3/16"	9/16"	46
EC755US RT	2"	2-7/8"	2-9/16"	2-7/8"	5/8"	55
ERC250CONN RT (1)	2-1/2"	3-7/16"	3-1/4"	3-7/16"	1"	120
ERC300CONN RT (1)	3"	4"	3-15/16"	4"	1"	165
ERC350CONN RT (1)	3-1/2"	4-9/16"	4-7/16"	4-9/16"	1"	201
ERC400CONN RT (1)	4"	5-1/8"	4-15/16"	5-1/8"	1"	237

(1) 2 1/2" to 4" UL Listed and Rated for Rigid Conduit. Product is stamped accordingly.

Compliances:

Certified Made in the USA

UL 514B, 467

Compression Fittings Concrete Tight

Suitable for Direct Burial ***

NEMA Standard FB1

Federal Standard A-A-50553

Certified for MIL-STD 810 Sinusoidal Vibrations

CSA Standard: C22.2 No. 18F

RoHS Compliant

REACH Compliant

CA Prop 65 Compliant

UNSPSC 39121434



Available OPTIONS:

Factory Installed 105° UL Rating Insulated Bushing-
For this Option, Add Suffix B to Above Cat Number

** Galvanized Plating - Option

For this Option, Add Suffix "G" to Above Cat Number

*** Rain Tight Series Recommended for
Direct Burial Requirements

EMT Steel Rain Tight Couplings

Size Range: 1/2" - 4" 2 1/2" thru 4" are UL Listed & Approved for Use on *Both* EMT & Rigid

Product Series: ECRT EMT Rain Tight Compression Coupling

Material: Solid Alloy Steel Construction

Zinc Plated with a Chromate Finish **

Made in the USA

Features:

Precision Machined Cut Threads

AMFICO **EZ Torque** Solid Steel Compression Nuts

Rain Tight Nuts Plated Gold Tone

UL Rated Concrete Tight

Twice the Strength and Durability of ALL Die Cast and Malleable Products

Compression Nut Plated Gold Tone for
EZ Inspection and Identification

Guaranteed Rain Tight

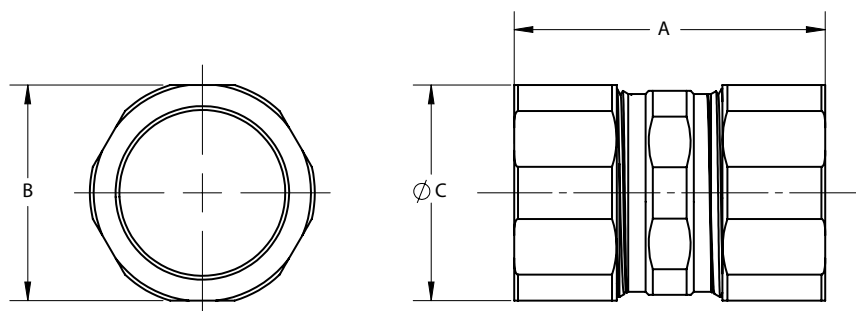
Industrial SPEC-grade



Rain Tight Compression Coupling



Full FLAT HEX Surface for
EZ Torque Steel Compression Nuts
Torques Tight & Right



CAT #	TRADE SIZE	A LENGTH	B HEX	C DIAMETER	Wt. Per/C
EC760US RT	1/2"	1-3/8"	15/16"	1"	9
EC761US RT	3/4"	1-9/16"	1-3/16"	1-1/4"	13
EC762US RT	1"	1-5/8"	1-7/16"	1-1/2"	18
EC763US RT	1-1/4"	2"	1-13/16"	1-15/16"	29
EC764US RT	1-1/2"	2-1/4"	2-1/16"	2-3/16"	42
EC765US RT	2"	2-3/8"	2-9/16"	2-11/16"	61
ERC250CPLG RT (1)	2-1/2"	3-13/16"	3-1/4"	3-7/16"	127
ERC300CPLG RT (1)	3"	3-15/16"	3-15/16"	4"	167
ERC350CPLG RT (1)	3-1/2"	3-15/16"	4-7/16"	4-9/16"	204
ERC400CPLG RT (1)	4"	4"	4-15/16"	5-1/8"	235

(1) 2 1/2" to 4" UL Listed and Rated for Rigid Conduit. Product is stamped accordingly.

Compliances:

Certified Made in the USA

UL 514B, 467

Compression Fittings Concrete Tight

Suitable for Direct Burial ***

NEMA Standard FB1

Federal Standard A-A-50553

Certified for MIL-STD 810 Sinusoidal Vibrations

CSA Standard: C22.2 No. 18F

RoHS Compliant

REACH Compliant

CA Prop 65 Compliant

UNSPSC 39121434



Available OPTIONS:

** Galvanized Plating - Option

For this Option, Add Suffix "G" to Above Cat Number

*** Rain Tight Series Recommended for
Direct Burial Requirements

EMT One Hole Straps

Size Range: 1/2" - 4"

Product Series: CSE - 1 Hole EMT Strap

Material: Steel Construction

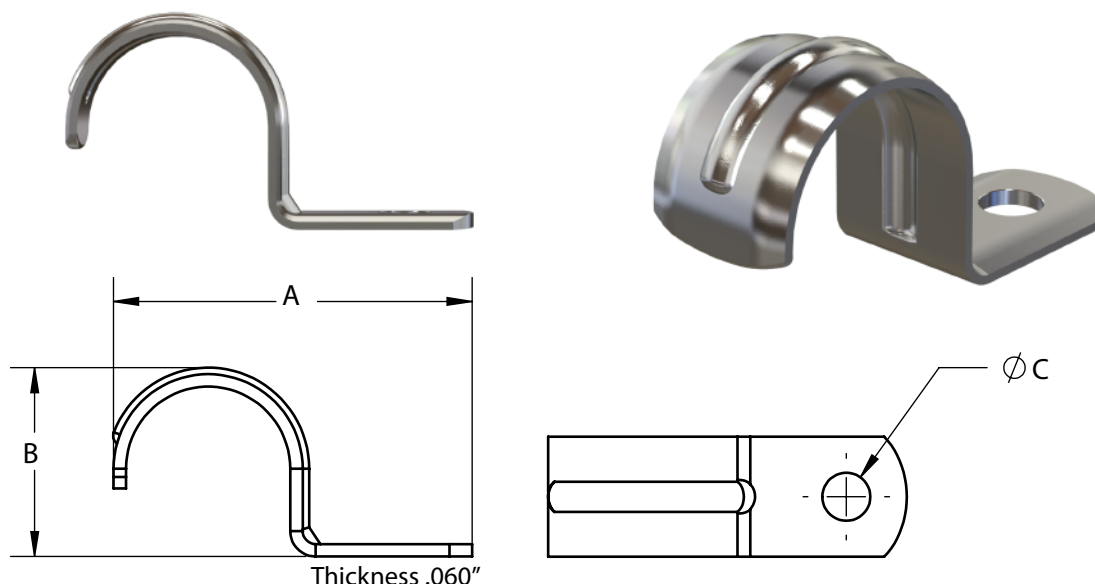
Bright Electro Zinc Plated

Made in the USA

Industrial SPEC-grade

CSE Series Steel EMT Straps

AMFICO Steel One Hole Straps Snap On to the Conduit Allowing the Installer to Easily Position the Strap Prior to Mounting. Alignment of EMT is Quick and Easy.



Cat #	TRADE SIZE	A LENGTH	B HEIGHT	C HOLE ID	Unit Ctn.	Mstr. Ctn.	Wt. Per/C
CSE501	1/2"	1-5/8"	11/16"	1/4"	100	1000	3
CSE751	3/4"	1-7/8"	15/16"	1/4"	100	500	4
CSE1001	1"	2-1/8"	1-3/16"	5/16"	50	250	6
CSE1251	1-1/4"	2-3/4"	1-1/2"	3/8"	30	150	9
CSE1501	1-1/2"	3"	1-3/4"	3/8"	25	125	13
CSE2001	2"	3-3/4"	2-3/16"	7/16"	20	100	17
CSER2501	2-1/2"	4-3/4"	2-7/8"	9/16"	-	20	42
CSER3001	3"	5-3/8"	3-1/2"	9/16"	-	10	49
CSER3501	3-1/2"	6"	4"	9/16"	-	10	71
CSER4001	4"	6-1/2"	4-1/2"	9/16"	-	10	78

Compliances:

Certified Made in the USA

Indoor or Outdoor Use

RoHS Compliant

REACH Compliant

CA Prop 65 Compliant

UNSPSC 31162310



Available OPTIONS:

2 Hole Straps EMT and Rigid

One-Hole BX Type

Cat. #	Size	Unit Ctn	Std Pkg	WT/ 100
CSBX381	12-2, 12-3, 10-2, 10-3	100	1000	1

Single-Channel, One-Piece Steel Surface Raceway

500® and 700® Series Raceway is ideal for surface mounting small amounts of electrical wiring or communication cables. These rugged raceways offer a low profile appearance which blend with any decor. 500® and 700® Series Raceway all come with our exclusive ScuffCoat™ finish for increased durability and scratch-resistance.

500 and 700 Series Raceway profiles.



500 Series Raceway and components used in a ceiling fan installation.



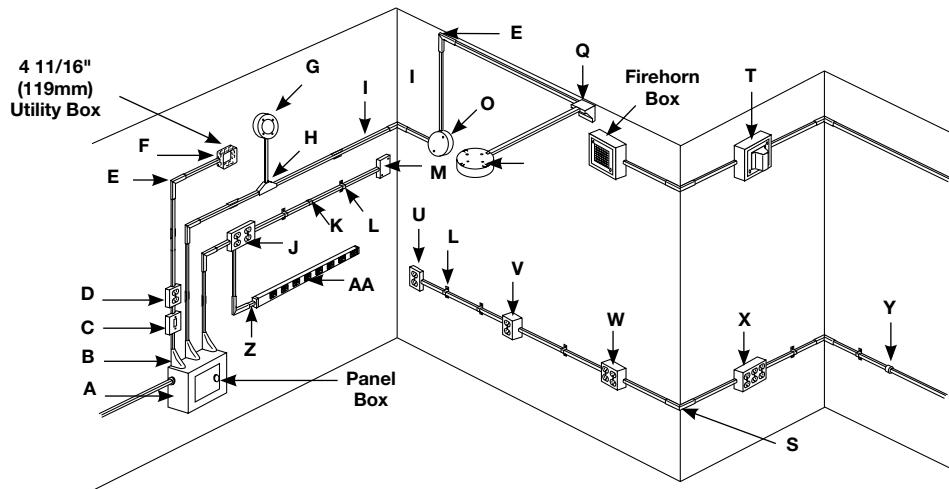
FEATURES & BENEFITS

- **Low-profile, unobtrusive appearance.** Blends with any decor or setting. Excellent for low-voltage wiring.
- **ScuffCoat finish.** Tough, durable, scratch-resistant finish which can be overpainted with latex paint.
- **Surface mounting.** Eliminates disturbing the building structure or wall finish to make renovations easy.
- **V5748-3 Device Box accommodates wireless.** Designed for use with Ortronics® Wi-Jack™ Wireless Access Points.
- **Full line of fittings.** Provides unlimited wiring solutions and interconnection between raceway systems.
- **More choice of colors.** 700 Series Raceway and Fittings are available in ivory and white.
- **Fittings have removable covers.** Allows easy access to wiring for changes and additions.
- **Raceway cutters with replaceable blades.** Cuts raceway cleanly, reduces labor, and installation time.
- **Datacom connectivity options.** Accepts industry standard and proprietary devices from a wide range of manufacturers to provide a seamless and aesthetically pleasing interface for voice, data, audio, and video applications at the point of use.
- **UL5 and ADA compliant.** Raceway and fittings meet UL5 specifications and can be installed in conformance with ADA requirements.
- **UL and cUL Listed component raceways.** File E4376 Guide RJBT, Fittings: File E41751 Guide RJPR. Meets Article 386 of NEC and meets Section 12-600 of CEC.



Typical applications for 500 & 700 Series Raceway.

500 & 700 Series System Product Applications



- | | | | | | |
|-------------|-----------------------------|------------|------------------------|-------------|---------------------------------|
| A — 5781A | 3/4" (19.1mm) Box Connector | J — 5747-2 | Shallow Device Box | S — V718 | External Elbow |
| B — V5786 | Adjustable Offset Connector | K — V706 | Cover Clip | T — R5753 | Extra Deep Alarm Device Box |
| C — V57240 | Single Pole Switch and Box | L — V704 | Mounting Strap | U — V5747S | Shallow Device Box |
| D — V57243G | Duplex Receptacle and Box | M — V57242 | Utility Box | V — V5744 | Extra Deep Device Box |
| E — V711 | Flat Elbow | N — V717 | Internal Elbow | W — V5748-2 | Device Box |
| F — V5785 | Combination Connector | O — V5734A | Utility Box | X — V5748-3 | Device Box |
| G — V5738 | Fixture Box Solid Base | P — V5739 | Fixture Box Solid Base | Y — 5782 | 1/2" (12.7mm) Conduit Connector |
| H — V5715 | Tee Fitting | Q — V5719 | Corner Box | Z — V2089E | Reducing Fitting |
| I — V5703 | Supporting Clip | R — R5752 | Alarm Device Box | AA — | Plugmold Multioutlet System |

V500 & V700 Series Wire Fill Capacity Charts

V500/V700 Series Raceway Wire Fill Capacities for Power

WIRE SIZE THHN/THWN	O.D.		NUMBER OF CONDUCTORS 40% FILL	
	inches	(mm)	V500 SERIES	V700 SERIES
14 AWG	0.111	(2.8)	7	10
12 AWG	0.130	(3.3)	5	7
10 AWG	0.164	(4.2)	3	4

V500/V700 Series Raceway Wire Fill Capacities for Communications

	CABLE/WIRE SIZE	O.D.		V500 SERIES		V700 SERIES	
		inches	(mm)	20% FILL*	40% FILL**	20% FILL*	40% FILL**
UNSHIELDED TWISTED PAIR	4-pair, 24 AWG, Cat 3	0.190	(4.8)	1	2	1	3
	4-pair, 24 AWG, Cat 5e	0.210	(5.3)	1	2	1	3
	4-pair, 24 AWG, Cat 6	0.250	(6.3)	0	1	1	2
TELEPHONE	2-pair, 24 AWG	0.140	(3.6)	2	4	3	6
	3-pair, 24 AWG	0.150	(3.8)	2	4	2	5
	4-pair, 24 AWG	0.190	(4.8)	1	2	1	3
	25-pair, 24 AWG	0.410	(10.4)	0	0	0	0
COAXIAL	RG58/U	0.195	(5.0)	1	2	1	3
	RG59/U	0.242	(6.1)	0	1	1	2
	RG62/U	0.242	(6.1)	0	1	1	2
	RG6/U	0.270	(6.9)	0	1	0	1
TWINAXIAL	100 Ohm	0.330	(8.4)	0	0	0	1
SHIELDED TWISTED PAIR	TYPE 1	0.390	(9.9)	0	0	0	0
	TYPE 2	0.465	(11.8)	0	0	0	0
	TYPE 3	0.245	(6.2)	0	1	0	1
FIBER	Mini ZipCord	0.079 x 0.157	(2 x 4)	3	6	4	8
	ZipCord	0.118 x 0.236	(3 x 6)	1	2	1	3
	Round 4 Strand Fiber	0.187	(4.8)	1	2	1	3
	Round 6 Strand Fiber	0.256	(6.5)	0	1	1	2
















* 20% cable fill is calculated to approximate reduction in cable capacity due to connectors mounted within raceway and fittings that may restrict cross sectional area.

** 40% cable fill is the maximum designed cable fill based on a proposed revision to TIA/EIA 569-A.















Download this product's PEP ecosport[®] environmental product declaration at www.legrand.us/resources-and-downloads. This declaration conforms with ISO 14025 and 14040 and is in alignment with EN 15804.

500 & 700 Series Raceway & Fittings Ordering Information

Catalog No./Item	Description/Specifications	Catalog No./Item	Description/Specifications
V500 	Raceway – .040" (1.0mm) steel. Comes in 10 ft. (3.05mm) lengths, one 5701 Coupling furnished with each length. Five ft. (1.525m) lengths available, order V500-5.	V518 V718 718WH 	External Elbow – For outside surfaces at right angles.
V700 700WH 	Raceway – .040" (1.0mm) steel. Comes in 10 ft. (3.05mm) lengths, one 5701 Coupling furnished with each length. Five ft. (1.525m) lengths available, order V700-5.	V5700F 	Flexible Section – For getting around difficult angles. End fittings and bulk conduit lengths available. Maximum painted length 3' (915mm) longer lengths furnished unpainted, consult factory for availability.
502 702 	Bushing – Protects wires from abrasion. Bushing slips into open end of raceway where it enters a fitting.	5701 	Coupling – For joining and supporting lengths of V500 or 700 Series raceway. One coupling supplied with each length.
V504 V704 704WH 	Mounting Strap (1- or 2-Hole) – Convert to one-hole by breaking off at score. Lanced tab holds strap in place while fastening to surface.	V5703 	Supporting Clip – For supporting lengths of V500 or 700 Series raceway at any point desired.
V506 V706 706WH 	Connection Cover – To cover openings where lengths of V500 or 700 Series, not squarely cut, come together.	5709 	Ground Clamp – Provides additional grounding or to ground remotely located devices. Attach ground wire to screw as required by NEC. Insert into V500 or 700 Series raceway before installing.
V511 V711 711WH 	90° Flat Elbow – For right angle turns on same surface.	V5711LHA V5711RHA 5711LHAWH 5711RHAWH 	Internal Twisted Elbows – For 90° twist with 90° turn including a flat run on sidewall to a flat run on ceiling or on door edge or window trim. Break out crescent twistout in cover to use with 700 Series.
V512 V712 	45° Flat Elbow – For diagonal 45° turns on same surface.	V5715 5715WH 	Tee – For branches at right angles. Break out crescent twistout in cover to use with V700.
V517 V717 717WH 	Internal Elbow – For inside surfaces at right angles.		










NOTE: Use #6 flat head screws with all fittings requiring screws except V504/V704, and V57200 Series; with V504/V704 use #8 pan head screws; with V57200 Series use #8 flat head screws.

500 & 700 Series Raceway Fittings Ordering Information

Catalog No./Item	Description/Specifications	Catalog No./Item	Description/Specifications
V5719 	Corner Box – Allows ample splice room. Each leg of base has 1/2" trade size KO.	V5786 V5786WH 	Adjustable Offset Connector – Eliminates offsetting raceway when connecting to surface type panel boxes. The adjustment from surface to center of bushings is 5/8" (15.9mm) minimum to 1 3/8" (35mm) maximum. Break out crescent twistout in cover to use with 700 Series. 1/2" (12.7mm) chase nipple and locknut furnished.
5780 	Special Nipple (Galvanized) – Has female 3/8" (9.5mm) pipe thread inside and male 1/2" (12.7mm) pipe thread outside. For hanging 3/8" (9.5mm) or 1/2" (12.7mm) fixtures to Wiremold fittings with 1/2" trade size KOs.	5790B 	Armored Cable Connector (Galvanized) – For connecting 14/2, 14/3, 12/2, and 12/3 armored cable to Wiremold fittings. Use a short piece of V500/V700 raceway (1 5/8" (41mm) min.) between this connector and fitting. Not for connection to 1/2" (12.7mm) Flex Conduit.
5781 5781A 	Box Connector (Galvanized) – For connecting raceway to conduit boxes, panel boxes, etc., having a KO for conduit. May also be used with conduit type fittings. Break out crescent twistout to use with V700.	5791 	5700 Series Box EMT Connector – Joins 1/2" (12.7mm) EMT directly into any V5700 Series Wiremold box.
5782A 	Conduit Connector (Galvanized) – For connecting raceway to conduit. Break out crescent twistout to use with V700.	V2475D 	2400 Series Raceway Bridge Fitting – For allowing 2400 Series Raceway to bridge over existing installations of V500/V700 Series Raceway
V5783 	Elbow Box Connector – For connecting raceway at right angles to conduit boxes, panel boxes, etc., having a KO for 1/2" (12.7mm) conduit. Break out crescent twistout in cover to use with V700.	V4075DA 	4000 Series Raceway Bridge Fitting – For allowing 4000 Series Raceway to bridge over existing installations of V500/V700 Series Raceway.
V5784 	Elbow Conduit Connector – For connecting raceway at right angles to 1/2" (12.7mm) conduit or armored cable connectors. Break out crescent twistout in cover to use with V700.		
V5785 5785WH 	Combination Connector – For connecting raceway, without offsetting, to any 3 1/4" (83mm) or 4" (102mm) outlet box mounted on the surface with a KO for 1/2" (12.7mm) conduit. The base end and bottom has two 1/2" trade size KOs. Break off cover extension to use with 700 Series. Spring steel bushing included for end connection to box, eliminating conduit nipple and locknut.		

NOTE: Use #6 flat head screws with all fittings requiring screws except V504/V704, and V57200 Series; with V504/V704 use #8 pan head screws; with V57200 Series use #8 flat head screws.

500 & 700 Series Raceway Device Boxes Ordering Information

Catalog No./Item	Description/Specifications	Catalog No./Item	Description/Specifications																												
V57240  	15A, 125V Single Pole Switch and Box – Accommodates other standard single-gang switches in place of furnished standard single pole switch. Cover has twistouts for V500 or V700 on each end. Twistout on ends permits running raceway close to interior trim. Base has 1/2" trade size KOs.	V5744S   5744SWH   	Deep Switch and Receptacle Box – For installing signal system alarm wiring and communication devices. Base has 1/2" trade size and rectangular single-gang KOs.																												
V57242 	Utility Box – For use as tee, cross, pull box, junction box, blank box, etc. Cover has 1/2" trade size KO and twistouts for V500 and V700 on each end and side. End twistouts permit running raceway close to interior trim. Base has 1/2" trade size KOs.	<table border="1"> <thead> <tr> <th>CAT NO.</th><th>L</th><th>W</th><th>GANG #</th></tr> </thead> <tbody> <tr> <td>V5744S, WH </td><td>4 5/8" (118mm)</td><td>2 7/8" (73mm)</td><td>1</td></tr> <tr> <td>V5744S-2, WH </td><td>4 3/4" (121mm)</td><td>4 3/4" (121mm)</td><td>2*</td></tr> <tr> <td>V5744S-3 </td><td>4 5/8" (118mm)</td><td>6 1/2" (165mm)</td><td>3</td></tr> </tbody> </table>	CAT NO.	L	W	GANG #	V5744S, WH 	4 5/8" (118mm)	2 7/8" (73mm)	1	V5744S-2, WH 	4 3/4" (121mm)	4 3/4" (121mm)	2*	V5744S-3 	4 5/8" (118mm)	6 1/2" (165mm)	3													
CAT NO.	L	W	GANG #																												
V5744S, WH 	4 5/8" (118mm)	2 7/8" (73mm)	1																												
V5744S-2, WH 	4 3/4" (121mm)	4 3/4" (121mm)	2*																												
V5744S-3 	4 5/8" (118mm)	6 1/2" (165mm)	3																												
V57243G  	15A, 125V Duplex Grounding Receptacle (Nema 5-15R) and Box – Accommodates other standard 15A (NEMA 5-15R) or 20A (NEMA 5-20R) duplex devices in place of furnished duplex grounding receptacle. Cover has twistouts for V500 and V700 on each end and side. End twistouts permit running raceway close to interior trim. Base has 1/2" trade size KOs.	V5745   5745WH   	Combination Device Box – For connecting surface runs of 1/2" (12.7mm) conduit, etc. Cover has two raceway twistouts on one end and three on opposite end; also two 1/2" trade size KOs and a raceway twistout on each side. Base has two 1/2" trade size KOs.																												
V5741  5741WH  	Device Box – For shallow type switches (three-way, single, and double pole) and receptacles, (three-wire locking receptacles and single-gang combination devices). Base has 1/2" trade size KO. End twistout permits running raceway close to interior trim.	V5747   5747WH   	Shallow Device Box – For standard shallow switches, receptacles, communication devices, and single-gang combination devices. Base has two 1/2" trade size KOs.																												
V5744   5744WH   	Extra Deep Device Box – Designed for deep devices – momentary contact, and remote control switches, hospital signaling system devices, and deep communication devices. Base has 1/2" trade size KOs.	<table border="1"> <thead> <tr> <th>CAT NO.</th><th>L</th><th>W</th><th>GANG #</th></tr> </thead> <tbody> <tr> <td>V5747, WH </td><td>4 5/8" (118mm)</td><td>2 7/8" (73mm)</td><td>1</td></tr> <tr> <td>V5747-2, WH </td><td>4 3/4" (121mm)</td><td>4 3/4" (121mm)</td><td>2*</td></tr> <tr> <td>V5747-3 </td><td>4 5/8" (118mm)</td><td>6 1/2" (165mm)</td><td>3</td></tr> </tbody> </table>	CAT NO.	L	W	GANG #	V5747, WH 	4 5/8" (118mm)	2 7/8" (73mm)	1	V5747-2, WH 	4 3/4" (121mm)	4 3/4" (121mm)	2*	V5747-3 	4 5/8" (118mm)	6 1/2" (165mm)	3													
CAT NO.	L	W	GANG #																												
V5747, WH 	4 5/8" (118mm)	2 7/8" (73mm)	1																												
V5747-2, WH 	4 3/4" (121mm)	4 3/4" (121mm)	2*																												
V5747-3 	4 5/8" (118mm)	6 1/2" (165mm)	3																												
<table border="1"> <thead> <tr> <th>CAT NO.</th><th>L</th><th>W</th><th>GANG #</th></tr> </thead> <tbody> <tr> <td>V5744, WH </td><td>4 5/8" (118mm)</td><td>2 7/8" (73mm)</td><td>1</td></tr> <tr> <td>V5744-2, WH </td><td>4 3/4" (121mm)</td><td>4 3/4" (121mm)</td><td>2*</td></tr> <tr> <td>V5744-3 </td><td>4 5/8" (118mm)</td><td>6 1/2" (165mm)</td><td>3</td></tr> </tbody> </table>	CAT NO.	L	W	GANG #	V5744, WH 	4 5/8" (118mm)	2 7/8" (73mm)	1	V5744-2, WH 	4 3/4" (121mm)	4 3/4" (121mm)	2*	V5744-3 	4 5/8" (118mm)	6 1/2" (165mm)	3		V5748   5748WH   	Device Box – For deep switches, receptacles and communication devices. Base has two 1/2" trade size KOs.												
CAT NO.	L	W	GANG #																												
V5744, WH 	4 5/8" (118mm)	2 7/8" (73mm)	1																												
V5744-2, WH 	4 3/4" (121mm)	4 3/4" (121mm)	2*																												
V5744-3 	4 5/8" (118mm)	6 1/2" (165mm)	3																												
		<table border="1"> <thead> <tr> <th>CAT NO.</th><th>L</th><th>W</th><th>GANG #</th></tr> </thead> <tbody> <tr> <td>V5748, WH </td><td>4 5/8" (118mm)</td><td>2 7/8" (73mm)</td><td>1</td></tr> <tr> <td>V5748-2, WH </td><td>4 3/4" (121mm)</td><td>4 3/4" (121mm)</td><td>2*</td></tr> <tr> <td>V5748-3 </td><td>4 5/8" (118mm)</td><td>6 1/2" (165mm)</td><td>3</td></tr> <tr> <td>V5748-4 </td><td>4 5/8" (118mm)</td><td>8 11/32" (212mm)</td><td>1</td></tr> <tr> <td>V5748-5 </td><td>4 3/4" (121mm)</td><td>10 5/32" (212mm)</td><td>2*</td></tr> <tr> <td>V5748-6 </td><td>4 5/8" (118mm)</td><td>11 31/32" (165mm)</td><td>3</td></tr> </tbody> </table>	CAT NO.	L	W	GANG #	V5748, WH 	4 5/8" (118mm)	2 7/8" (73mm)	1	V5748-2, WH 	4 3/4" (121mm)	4 3/4" (121mm)	2*	V5748-3 	4 5/8" (118mm)	6 1/2" (165mm)	3	V5748-4 	4 5/8" (118mm)	8 11/32" (212mm)	1	V5748-5 	4 3/4" (121mm)	10 5/32" (212mm)	2*	V5748-6 	4 5/8" (118mm)	11 31/32" (165mm)	3	
CAT NO.	L	W	GANG #																												
V5748, WH 	4 5/8" (118mm)	2 7/8" (73mm)	1																												
V5748-2, WH 	4 3/4" (121mm)	4 3/4" (121mm)	2*																												
V5748-3 	4 5/8" (118mm)	6 1/2" (165mm)	3																												
V5748-4 	4 5/8" (118mm)	8 11/32" (212mm)	1																												
V5748-5 	4 3/4" (121mm)	10 5/32" (212mm)	2*																												
V5748-6 	4 5/8" (118mm)	11 31/32" (165mm)	3																												




NOTES: Covers on this page have double twistouts. Break out lower twistout for use with V500, and both twistouts for use with V700.




* V5744-2 and V5744S-2 Base and V5747-2 and V5748-2 Base have 1/2" and 1" concentric trade size KOs and a 1 13/16" x 2 7/8" (47mm x 73mm) rectangular KO to permit mounting on a one-gang in-wall outlet box.

 Replace V with VC or WH with WHC to denote Canadian version — Agency approved for sale in Canada. 

† Larger gangs available, consult factory.

500 & 700 Series Raceway Device Boxes Ordering Information (continued)

Catalog No./Item	Description/Specifications																
V5748S 5748SWH 	Shallow Switch and Receptacle Box – For duplex receptacles (shallow type). Base has 1/2" trade size KOs.																
V5751 5751WH 	Flush-Type Extension Adapter – For extensions from existing flush wall boxes. Larger gangs available, consult factory.																
<table><tr><th>CAT NO.</th><th>L</th><th>W</th><th>GANG #</th></tr><tr><td>V5751,WH</td><td>4 5/8" (118mm)</td><td>2 7/8" (73mm)</td><td>1</td></tr><tr><td>V5751-2, WH</td><td>4 3/4" (121mm)</td><td>4 3/4" (121mm)</td><td>2*</td></tr><tr><td>V5751-3</td><td>4 5/8" (118mm)</td><td>6 1/2" (165mm)</td><td>3</td></tr></table>		CAT NO.	L	W	GANG #	V5751,WH	4 5/8" (118mm)	2 7/8" (73mm)	1	V5751-2, WH	4 3/4" (121mm)	4 3/4" (121mm)	2*	V5751-3	4 5/8" (118mm)	6 1/2" (165mm)	3
CAT NO.	L	W	GANG #														
V5751,WH	4 5/8" (118mm)	2 7/8" (73mm)	1														
V5751-2, WH	4 3/4" (121mm)	4 3/4" (121mm)	2*														
V5751-3	4 5/8" (118mm)	6 1/2" (165mm)	3														
V5751A 5751AWH 	Deep Flush-Type Extension Adapter – For deep extensions from existing flush wall boxes.																

Catalog No./Item	Description/Specifications
R5752 (Red) V5752 (Ivory) 	Two-Gang Alarm Device Box – For surface mounting alarm devices and safety signals designed to fit 4" (102mm) square back boxes. Cover has three raceway twistouts on each side. Base has 1/2" and 1" trade size concentric and single-gang box KOs.
R5753 (Red) V5753 (Ivory) 	Two-Gang Extra Deep Alarm Device Box – For surface mounting alarm devices and safety signals designed to fit 4" (102mm) square back boxes. Cover is 2 3/4" (70mm) deep and has three raceway twistouts on each side. Base has 1/2" and 1" trade size concentric and single-gang box KOs.
V5760 	Blank Extension Box – For extending from existing flush switch and receptacle boxes to blank original outlet. Closed base available, consult factory.





NOTES: Covers on this page have double twistouts. Break out lower twistout for use with V500, and both twistouts for use with V700.

* V5744-2 and V5744S-2 Base and V5747-2 and V5748-2 Base have 1/2" and 1" concentric trade size KOs and a 1 13/16" x 2 7/8" (47mm x 73mm) rectangular KO to permit mounting on a one-gang in-wall outlet box.

 Replace V with VC or WH with WHC to denote Canadian version — Agency approved for sale in Canada. 

† Larger gangs available, consult factory.

500 & 700 Series Raceway Round Fixture Boxes Ordering Information




Catalog No./Item	Description/Specifications	Catalog No./Item	Description/Specifications								
V5731 		Blank Cover – Use with V5733 to convert into a pull or junction box. Has 1/2" trade size KO in center.	V5737  V5737A  V5739A  5737WH  5737AWH 	Extension Box/Open Base – For mounting on 3 1/4" (83mm), 4" (102mm) conduit boxes, or other recessed outlets. Cover takes devices with mounting screw centers of 2 3/4", 3 1/2", or 4 1/16" (70mm, 89mm, or 104mm). Use as a pull or junction box with V5736.							
V5733 		Outlet Box – Designed for devices with mounting screw centers of 1 15/32", 1 5/8", 1 22/32", or 1 27/32" (37mm, 41mm, 60mm, or 45mm). Accepts any device that mounts on G or H type conduit fittings.	<table><tr><th>CAT. NO.</th><th>DIA. A.</th></tr><tr><td>V5737, WH</td><td>4 3/4" (121mm)</td></tr><tr><td>V5737A, WH</td><td>5 1/2" (140mm)</td></tr><tr><td>V5739A</td><td>6 3/8" (162mm)</td></tr></table>	CAT. NO.	DIA. A.	V5737, WH	4 3/4" (121mm)	V5737A, WH	5 1/2" (140mm)	V5739A	6 3/8" (162mm)
CAT. NO.	DIA. A.										
V5737, WH	4 3/4" (121mm)										
V5737A, WH	5 1/2" (140mm)										
V5739A	6 3/8" (162mm)										
V5735 		Distribution Box – Each side accepts three parallel raceway runs. Base has 1/2" and 1" concentric trade size KOs and a 1 13/16" x 2 7/8" trade size KO to mount on a one-gang in-wall outlet box. Cover takes devices with mounting screw centers of 2 3/4", 3 1/2", and 4 1/16" (70mm, 89mm, and 104mm), and canopy fixtures 4 5/8" (118mm) diameter or smaller. Used as a pull or junction box with V5736.	V5738  V5738A  V5739  5738WH  5738AWH 	Fixture Box/Solid Base – For hanging fixtures. Cover takes devices with mounting screw centers of 2 3/4", 3 1/2", or 4 1/16" (70mm, 89mm, or 104mm). Base has four holes for fixture studs; five 1/2" trade size KOs and raised section for no-bolt fixture-stud. Use as a junction or pull box with V5736.							
V5736		Blank Cover – Use with V5735, V5737, V5737A, V5738, V5738A, V5739, or V5739A, or V2135 converting them to pull or junction boxes and for hanging lightweight pendant fixtures having 1/2" (12.7mm) pipe stems, etc. Has 1/2" trade size KO.	V5738AF 5738AFWH 	Fan Box/Solid Base – UL approved fixture box for ceiling fans. Cover accepts fan brackets with 3.2" (82mm) mounting centers. Supports up to 50 lbs. Base has six mounting holes and four 1/2" trade size KOs. #10 mounting screws provided.							

NOTE: Covers have double twistouts; Lower twistout for V500, and both twistouts for V700.

 Replace V with VC or WH with WHC to denote Canadian version — Agency approved for sale in Canada. 

* These boxes are not designed to support ceiling fans. For fan applications, use V5738AF.

500 & 700 Series Raceway Tools Ordering Information

Catalog No./Item	Description/Specifications	Catalog No./Item	Description/Specifications
605 607	 V500 Raceway Cutter 700 Series Raceway Cutter – Single action portable cutter.	5700LL	 Laser Level for 500/700 Series Raceway – Attaches to outlet box base and raceway fittings for perfect alignment of runs of raceway.
605K 607K	Replacement blade for 605 and 607 cutters – Replacement case-hardened steel blades cut clean and square.	5700CG	 Cutting Guide for 500/700 Series Raceway – Attaches to step ladder and holds raceway channel securely for accurate cuts.

NOTE: All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



NOTE: The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.



Electrical Wiring Systems

60 Woodlawn Street
 West Hartford, CT 06110
 Phone: 1.877.BY.LEGRAND (295-3472)
www.legrand.us/wiremold
 570 Applewood Crescent
 Vaughan, Ontario L4K 4B4
 Phone: 905.738.9195



SECTION 26 05 34 — OUTLET BOXES

Submittal 26-01 Rev 1 | MVMS Admin TI | Responds to Hargis 26SUB-01 (07/17/2026)

Response to review comment

Product data required — included: outlet box, device box, and mud/plaster ring product data.

Contents of this section

- 4" square outlet boxes, galvanized steel, 2-1/8" deep (52C18 series) — manufacturer product data follows.
- Device boxes and single/two-gang mud (plaster) rings — manufacturer product data follows.

Model #	52C18
UPC #	7.86E+11
Product Height	0.75
Product Width	4
Product Weight	0.326
Material	Galvanized Steel
Cubic Capacity	8.8 (144.2)
Standard Package	50
Color	Silver

SECTION 26 09 23 — LIGHTING AND RECEPTACLE CONTROLS

Submittal 26-01 Rev 1 | MVMS Admin TI | Responds to Hargis 26SUB-01 (07/17/2026)

Response to review comment

Product data and shop drawings required — included: control device product data and shop drawings for occupancy sensors, photo sensors, dimming stations, and plug-load controllers.

Contents of this section

- Occupancy / vacancy sensors — product data follows.
- Photo sensors (daylighting) — product data follows.
- Dimming stations — product data follows.
- Plug-load controllers (controlled receptacle circuits) — product data follows.
- Control shop drawings — typical classroom/office application diagrams follow.

SECTION 26 27 26 — WIRING DEVICES

Submittal 26-01 Rev 1 | MVMS Admin TI | Responds to Hargis 26SUB-01 (07/17/2026)

Response to review comment

Reviewer comment: incomplete materials; controlled receptacles not included; floor box device not part of project. REVISED: controlled receptacles added and identified by device type per plan flag notes; floor box device and cover plate removed; device schedule below cross-references each device to its plan designation.

Contents of this section

- Device schedule (below), cross-referencing each device type to its plan designation.
- Standard, controlled, and GFCI duplex receptacles — manufacturer product data follows.

Device Type	Catalog Number	Description	Plan Designation
Duplex receptacle, standard	Leviton TBR20-W	20A/125V tamper-resistant duplex, commercial spec grade, NEMA 5-20R, white	Unflagged duplex symbols, typical
Duplex receptacle, controlled	Leviton 5362-S1W	20A/125V split-circuit duplex, one outlet marked "Controlled" per NEC 406.3(E), industrial spec grade, white	Duplex symbols with controlled-receptacle flag per plan flag notes
Duplex receptacle, GFCI	Leviton GFTR2-W	20A/125V self-test tamper-resistant GFCI, NEMA 5-20R, white	Symbols flagged "GFI" per plan flag notes



TBR20-W

Tamper-Resistant Duplex Receptacle, 20 Amp, 125 Volt

Duplex Receptacle Outlet, Commercial Specification Grade, Tamper-Resistant, Smooth Face, 20 Amp, 125 Volt, Back and Side Wire, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - White

ROHS Compliant : Yes

Technical Information

AC Horsepower Ratings

At Rated Voltage : 1 HP

Electrical Specifications

Amperage : 20 A

Current Limiting : Full Rated Current

Dielectric Voltage :
Withstands 2000V per UL498

Grounding : Self-Grounding

Pole : 2

Temperature Rise : Max 30C
after 100 cycles OL at 150
percent rated current

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Operating Temperature : -40°
C to 60°C

Material Specifications

Body Material : Thermoplastic

Color : White

Face Material : Thermoplastic

Ground Clips : Brass

Grounding Screw : Plated
Steel

Line Contacts : Brass .031
Thick

Shutter Mechanism : Acetal

Strap Material : Zinc-Plated
Steel

Terminal Screws : Plated Steel

Mechanical Specifications

Product ID : Ratings
permanently marked on device

Screw Terminal Torque : 14-
18 in-lbs

Terminal Accom. : 14-10 AWG

Product Features

Color : White

Device Type : Duplex
Receptacle Outlet

Feature : Two Outlets Marked
Controlled|Tamper-
Resistant|Smooth Face

Color :  White

UPC Code : 078477381816

Country Of Origin : Mexico

NEMA :  5-20R

Available Colors :



Terminal ID : Brass-Hot,
Green-Ground, Silver-Neutral

Grade : Commercial
Specification Grade

Termination : Back and Side
Wire

NEMA : 5-20R

Standards and Certifications

ANSI : C-73

CSA C22.2 No. 42 : File
152105

NEMA : WD-1 WD-6


NOM : 057

UL 498 : File E13399

Warranty : 10-Year Limited

Dimensional Drawing

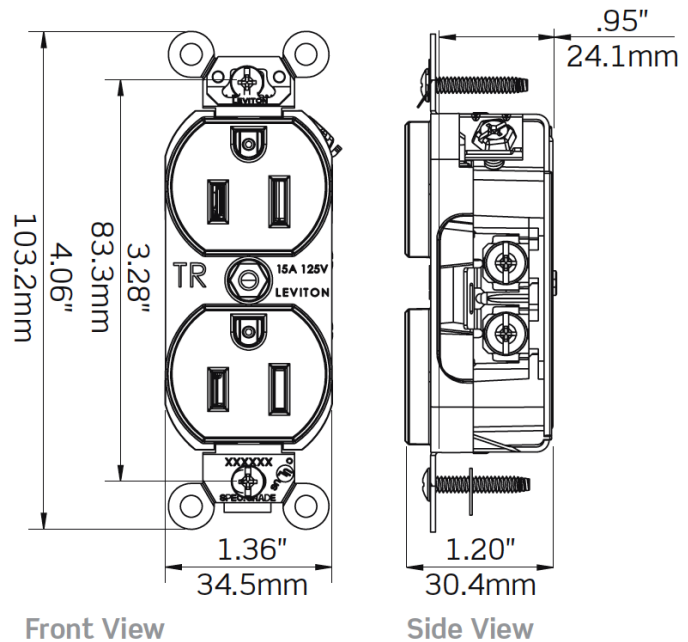Typical for Commercial Spec Grade TR Receptacles



SPECIFICATION SUBMITTAL

JOB NAME: 	CATALOG NUMBERS: 	
JOB NUMBER: 		

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·

FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 ·

Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/company/about-leviton/locations

© 2026 Leviton Manufacturing Co., Inc.



Color :  White

UPC Code : 078477710890

Country Of Origin : Mexico

NEMA :  5-20R

Available Colors :



5362-S1W

20 Amp Duplex Receptacle/Outlet, Industrial Grade, Self-Grounding

Duplex Receptacle Outlet, Heavy-Duty Industrial Specification Grade, Split-Circuit, One Outlet Marked "Controlled", Smooth Face, 20 Amp, 125 Volt, Back or Side Wire, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - White

ROHS Compliant : Yes

Leviton offers custom imprinting solutions to meet the 2014 National Electrical Code requirements for identifying receptacles that will be automatically de-energized as part of an overall plug load control program. All 15A & 20A, 125V receptacles that are automatically controlled will be marked with a specific symbol.

Technical Information

AC Horsepower Ratings

At Rated Voltage : 1 HP

Electrical Specifications

Amperage : 20 A

Dielectric Voltage :
Withstands 2000V per UL498

Grounding : Self-Grounding

Pole : 2

Temperature Rise : Max 30C
after 250 cycles OL at 200
percent rated current

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Flammability : Rated V-2 per
UL 94

Operating Temperature : -40°
C to 75°C

Material Specifications

Body Material : Nylon

Face Material : Nylon

Ground Clips : Brass

Grounding Screw : Brass 8-32

Line Contacts : Triple-Wipe .
040" High Performance Brass
Alloy

Strap Material : Brass .050"

Terminal Clamp : Zinc-Plated
Steel

Terminal Screws : Brass 10-32

Mechanical Specifications

Product ID : Ratings are
permanently marked on device

Product Features

Color : White

Device Type : Duplex
Receptacle Outlet

Screw Terminal Torque : 14-18 in-lbs

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot,
Green-Ground, Silver-Neutral

Termination : Back or Side
Wire

Wire Type : Solid or Stranded
Building Wire

Feature : Split-circuit, One
Outlet Marked
Controlled|Smooth Face

Grade : Heavy-Duty Industrial
Specification Grade

NEMA : 5-20R

Standards and Certifications

ANSI : C-73

Applicable Standards : UL
498, CSA C22.2 No. 42,
FedSpec W-C 596

Certification/Listing : UL,
CSA, NOM-ANCE

NEMA : WD-1 & WD-6

Warranty

Warranty : 10-Year Limited

Patents*

MX321216

US8684771

This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

SPECIFICATION SUBMITTAL

JOB NAME: 	CATALOG NUMBERS: 	
JOB NUMBER: 		

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.
T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·
FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)
5386- 1797 ·

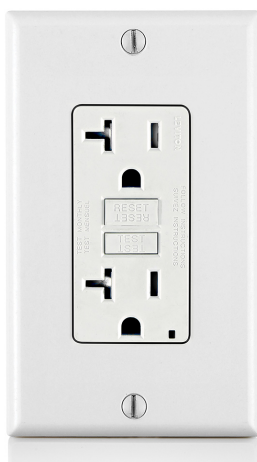
Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without
notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/company/about-leviton/locations



Color :  White

UPC Code : 078477497364

Country Of Origin : China

NEMA :  5-20R

Available Colors :



GFTR2-W

20 Amp, Self Test, Tamper-Resistant Slim GFCI Outlet with LED Indicator Light

20 Amp, 125 Volt Receptacle/Outlet, 20 Amp Feed-Through, Tamper-Resistant, Self-test SmartlockPro Slim GFCI, Monochromatic, Residential/Commercial applications, back and side wired, nylon wallplate/faceplate, screws and self grounding clip included - White

- SAFE – Delivers continuous ground fault protection
- SELF TESTING – Automatically self-tests to ensure it can respond to ground fault
- SIMPLE – Status indicator light provides simple, intuitive feedback
- COMPATIBLE – Device designed to improve immunity for reduced HF nuisance tripping
- Now available in bulk pack - white color only

Technical Information

Electrical Specifications

Amperage : 20 A

Dielectric Voltage : 1250 VAC

Grounding : Self-Grounding

Horsepower Rating : 1 hp

Pole(s) : 2

Power Supply Input and

Frequency : 125V, 60Hz

Short Circuit Current Rating :

10 kA

Temperature Rise : Max 30°C

Trip Level : Class A

Voltage : 125 VAC

Wire(s) : 3

Environmental Specifications

Operating Temperature :

Maximum Continuous 66°C,
Minimum -35°C (w/o impact)

Material Specifications

Body : Thermoplastic

Face : Thermoplastic

Grounding Screw : #8
Galvanized Steel

Line Contacts : Brass

Mounting Strap : Galvanized
Steel

Self-Grounding Clip : Yes

TR Shutter : Thermoplastic

Terminal Clamps : Brass

Mechanical Specifications

Product ID : Ratings are
marked on device

Termination : Back and Side
Wire

Torque Range : 14-18 lbs.

Wire Accomodation : #10 -
#14 AWG Copper, #10 - #12
Copper Clad

Terminal Screws : #8 Plated Steel

Product Features

Brand : SmartlockPro

Color : White

Device Type : Duplex
Receptacle/Outlet

Feature(s) : Indicator Light,
Self-Test, Tamper Resistant

Grade : Residential
/Commercial Specification
Grade

NEMA Configuration : 5-20R

Product Type : GFCI

Warranty

Warranty : 2-Year Limited

Standards and Certifications

Applicable Standards and Certifications : UL|CSA|CSA C22.2 No. 144|CSA C22.2 No. 42|Fed Spec WC-596|UL 943|UL 498

NEMA : WD-1 and WD-6

Features and Benefits

- Provides continuous ground fault protection – detects and trips on actual ground fault even when self-test is being conducted
- On initial power up, tests the GFCI within 3 seconds
- Auto-monitoring exceeds the UL requirement
- Auto adapts and shifts to more frequent testing if potential problem is detected
- Status Indicator Light provides simple, intuitive feedback on power and protection status as well as indication of line/load reversal
- Patented Lockout Action prevents reset if GFCI is damaged and cannot respond to a ground fault
- Electronics are designed to minimize any false triggers
- Reduced depth makes it easier to install in any electrical box, even shallow ones
- Terminals allow for easy wiring options – back and side wire capable
- External back wire clamps provide visual indication of proper wire seating
- Withstands high torque and resists wire pullout
- Standard brass self-grounding clip
- Trip threshold meets or exceeds UL requirements for tripping time
- Improved immunity to high-frequency noise reduces nuisance tripping
- Advanced electronics design provides superior resistance to electrical surges and over-voltages
- Compatible with all Decora devices and wallplates; available in select Decora colors
- UL Fed Spec WC-596 rated

Patents*


CA2621644

CA2624409

CA2677283	CA2730014
MX302458	MX308495
MX344697	US10483066
US11349293	US11456138
US11831139	US7355117
US7697252	US7820909
US7868719	US8242362
US8587914	US8599522
US8944859	US9053886
US9276393	

This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

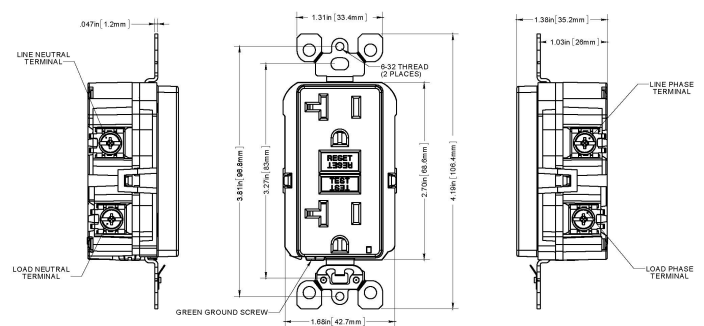Dimensional Drawing



SPECIFICATION SUBMITTAL

JOB NAME: JOB NUMBER: 	CATALOG NUMBERS: <table border="1" style="width: 100%;"> <tr> <td style="width: 50%; height: 20px;"></td> <td style="width: 50%; height: 20px;"></td> </tr> <tr> <td style="height: 20px;"></td> <td style="height: 20px;"></td> </tr> </table>				

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·

FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)

5386- 1797 ·

Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/company/about-leviton/locations

© 2026 Leviton Manufacturing Co., Inc.

SECTION INDEX — SUBMITTAL 26-01 REV 1

Sections in numerical order with bookmarks per the Section 260500 review comment. Section 26 51 00 Lighting is submitted separately as Submittal 26-03.

Section	Title	Prior Action	This Revision
26 05 19	Wire and Cables	SUB	Product data included
26 05 21	Metal Clad Cables	SUB	Product data included
26 05 29	Supporting Devices	NE	Approved prior review — included unchanged
26 05 33	Raceway Systems	SUB	ADDED — EMT, fittings, straps, surface metal raceway
26 05 34	Outlet Boxes	SUB	Product data included
26 09 23	Lighting and Receptacle Controls	SUB	Product data + shop drawings included
26 27 26	Wiring Devices	RR	Controlled receptacles added; floor box removed; device schedule added
26 51 00	Lighting	RR	Excluded — see Submittal 26-03