



SYZ420C-8S(V)

DUMP TRUCK



SYZ420C-8S(V) DUMP TRUCK



Core Selling Point

➤ Strong power

With a maximum horsepower of 462ps and maximum torque of 2200Nm. Maximum speed of 75 km/h, maximum climbing ability of 40%.

➤ High-level safety

Equipped with cylinder braking and ABS, safer braking.

➤ Easy recovery

Equipped with inter-axle and inter-wheel differential locks, maximum torque of 2200 N/m, more effective in getting out of difficult situations.

➤ High comfort

Equipped with coil spring suspension and adjustable air seats, providing a more comfortable driving experience.

➤ Superior handling

The transmission is equipped with a synchronizer and soft shaft control, making operation effortless and gear shifts clear, resulting in easier handling.

➤ High load capacity

Parallel dual 16T rear axles, 610L high-strength frame, and 315/80R22.5 20PR tires, offering strong load-bearing capacity

PRODUCT SPECIFICATION

Model		SYZ420C-8S(V)
Overall Parameters	Code	ZZX100000642
	Rudder Direction	L
	Curb Weight(kg)	17300
	GVW(kg)	54300
	Dimension (L×W×H)(mm)	9100×2540×3430
	Maximum vehicle speed (km/h)	75
	Wheel Base(mm)	2000+2500+1400
	Cab	Sany cab CB329
Chassis	Engine Model	D12C5-462E0
	Displacement(L)	12.12
	Emission Standard	EuroV
	Rated Power/Rev Speed(HP/rpm)	462/1900
	Maximum Torque/Rev Speed (Nm/rpm)	2200/1000-1500
	Transmission	Fast 12JSDX240T
	Frame(mm)	316× (8+8)
	Suspension	8/8/12 T55
	FrontAxle(t)	2×7.5T
	Middle, RearAxle(t)	2×16T, 5.262
	Tyre	315/80 R22.5 20PR
Truck	Fuel Tank(L)	400L
	Cargo Capacity(m3)	20
	Cargo Capacity(m3)	5800×2300×1500
	Material	NM450, bottom8, sides6
Other Configurations	Others	Front Lifting, U-shaped cargo box
	GPS Terminal-EMEA, ABS	

SANY Heavy Industry After-sales Service Hotline: 4008 87 8318

Contact Information:



Core Selling Point

➤ Strong power

With a maximum horsepower of 462ps and maximum torque of 2200Nm. Maximum speed of 75 km/h, maximum climbing ability of 40%.

➤ High-level safety

Equipped with cylinder braking and ABS, safer braking.

➤ Easy recovery

Equipped with inter-axle and inter-wheel differential locks, maximum torque of 2200 N/m, more effective in getting out of difficult situations.

➤ High comfort

Equipped with coil spring suspension and adjustable air seats, providing a more comfortable driving experience.

➤ Superior handling

The transmission is equipped with a synchronizer and soft shaft control, making operation effortless and gear shifts clear, resulting in easier handling. ➤

High load capacity

Parallel dual 16T rear axles, 610L high-strength frame, and 315/80R22.5 tires, offering strong load-bearing capacity.

PRODUCT SPECIFICATION



Model		SYM3311T1E
Overall Parameters	Code	QDP100001093
	Rudder Direction	Left
	Curb Weight (kg)	11500
	GVW (kg)	55000
	Axle load distribution (kg)	6325/5175
	Dimension (L×W×H)(mm)	8410×2540×3430
	Maximum vehicle speed (km/h)	75
	Wheel Base (mm)	2000+2500+1400
	Cab	Sany cab CB329
Chassis	Engine Model	Deutz D12C5-462E0
	Displacement (L)	12.12
	Emission Standard	Euro V
	Rated Power/Rev Speed (HP/rpm)	462/1900
	Maximum Torque / Rev Speed (Nm/rpm)	2200/1000-1500
	Transmission	Fast 12JSDX240T
	Frame (mm)	316× (8+8)
	Suspension	Leaf spring 8/8/12 T55
	Front Axle (t)	2×7.5T
	Middle, Rear Axle (t)	Differential, 2×16T, 5.262
	Tire	315/80R22.5 20PR
	Fuel Tank (L)	400L
Other Configurations	Brake Type	Drum/Drum
	GPS Terminal-EMEA, ABS	

SANY Heavy Industry

After-sales Service Hotline: 4008 87 8318

Contact Information:



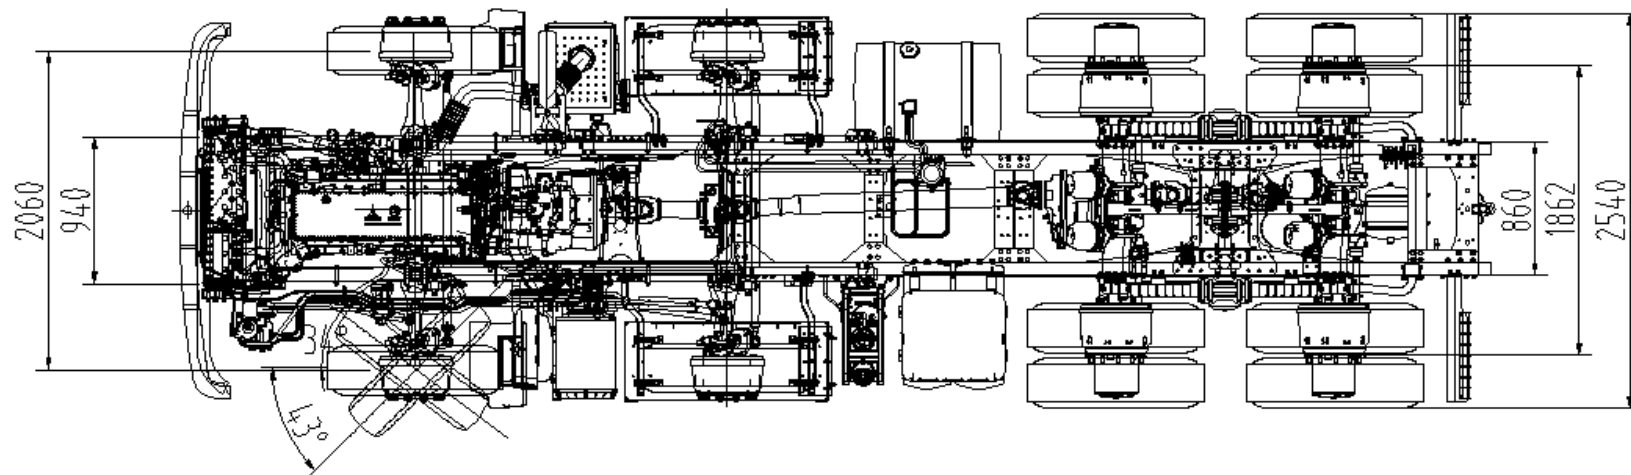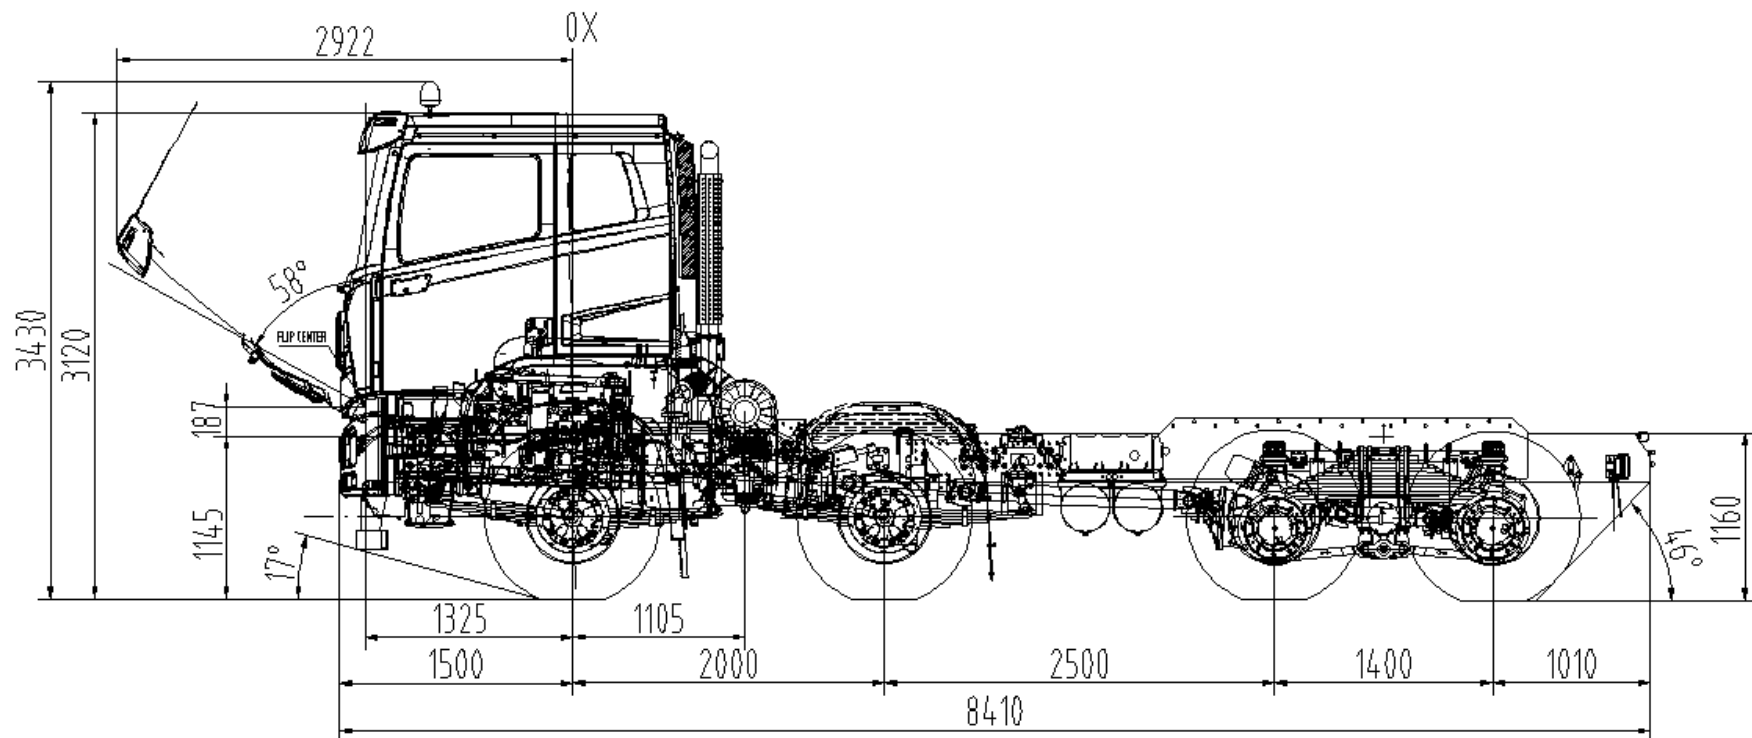

D12C5-462E0 ENGINE

Maximum power output: 340 kW at 1900 rpm.

Maximum torque: 2200Nm from 1000 to 1500 rpm

6-cylinder in-line diesel engine - High-pressure fuel-injection by common rail

Capacity 12.12 L


Turbocharger

Electronically controlled fan

Direction of rotation (seen from G/B end): anti-clockwise

EURO V exhaust emissions level

Cooling liquid

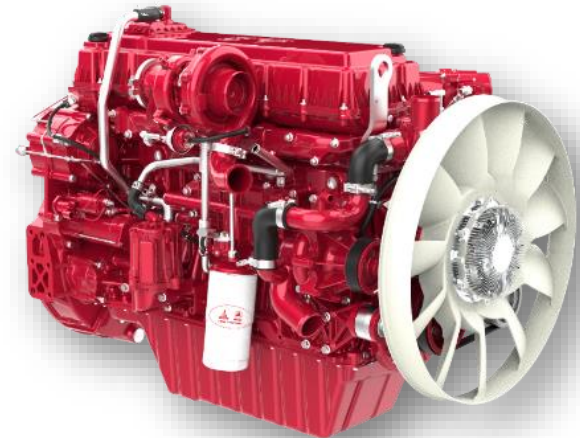

high
reliability



- Engine designed with a B10 life of 1.8 million kilometers; adopts CGI cylinder head, with a 30% increase in strength; uses high-strength engine block, with a 20% increase in strength.

high security



- Adopting the latest generation of high-power Jacobs engine brake, with a braking power of 238kW at 2100rpm.

strong
power



- With a maximum horsepower of 462ps and maximum torque of 2200N·m, the engine has a wide torque range.
- With upgraded power, it can easily overcome obstacles, climb hills with strength, respond faster, and provide worry-free overtaking.

low fuel
consumption



- Matched with a Cummins high-flow and efficient turbocharger suitable for dump truck working conditions;
- using piston rings and bearings with reduced friction to lower friction power;
- optimizing the combustion chamber of the piston to increase the explosion pressure and make diesel combustion more complete;
- optimizing the spray angle and number of fuel injectors;
- optimizing the swirl ratio of the intake duct, increasing the valve lift, and improving the intake.

CLUTCH

Single-plate clutch, diameter 430 mm

GEARBOX

FAST 12JSDX240T MT gearbox (13.15– 1) . Synchronizer Max. torque 2400 Nm, 12 forward gears and 2 reverse gears.

Pneumatic power shift.

Hydraulic control, pneumatic clutch booster


GEARBOX WITH POWER TAKE-OFF

Power take-off: QH50

Direction of rotation: Same as the engine

Torque: 500 Nm

1-6 Gear Ratios: 1/2.80, 2/2.20, 3/1.69, 4/1.32, 5/1.03, 6/0.80

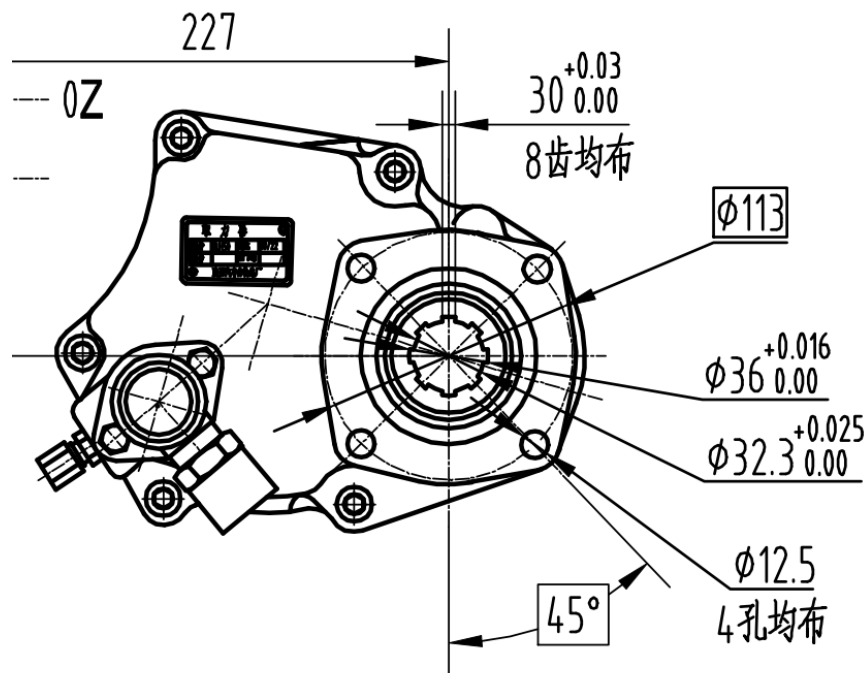

AUXILIARY BRAKING

Engine cylinder brake, braking power of 238kW at 2100rpm.

STEERING

Power steering, variable-flow hydraulic pump

Steering ratio 26.2

Integral hydraulic power assisted steering (1 independent circuit and 1 pump).

Driving on the left

WHEELS AND TYRES

Dimension 315/80R22.5-20PR, diameter 1076 mm

Maximum permissible speed 120km/h

Single tire carrying capacity 4125kg

Steel disc wheels, thickness 18mm, Rated carrying capacity 4500kg

FRONT AXLE

Front load capacity (technical max.): 2×7.5 t

REAR AXLES

Integral differential lock

Rear loading capacity (technical max.): 32 t

Rear load equally distributed

Drive axle ratio: 5.262

Service brake:

- Braking system with two independent circuits
- Drum brakes
- Anti-lock braking system (ABS)
- Dryer cartridge optimised by preventive maintenance.
- Silencer on pneumatic circuit
- Without rear trailer coupling.
- High-position rear brake cylinders

Parking brake:

- Manual parking brake
- Reinforced parking brake

Cab exterior:

- Flat roof cab with sleeper
- All steel Cab, electro-zinc plated and cataphoretic paint treatment.
- Four point mechanical cab suspension.
- 2 heated, electric control rear view mirrors.
- 2 wide angle rearview mirrors.
- Side view using mirrors only
- Kerb view mirror.
- Rear view mirrors for bodywork up to 2.55 m wide
- Air horn
- External sun visor
- rear window
- Rotating warning light on top of the cab

Cab interior:

- Multi-directional adjustable airbag suspension seat of driver
- Surround dashboard
- Audio-visual system with central control and large screen
- Combination instrument + combination switch
- Sleeper
- Passenger seat
- Curtain hook
- Manual air conditioning and heating
- Door and window central control system
- Remote control key
- Transmission Manipulator and Parking controller

Steering wheel equipment:

- "Performance" 4-spoke steering wheel adjustable for height and depth, with control for cruise control
- Video control
- 3-way adjustable steering column, Pneumatic locking



ELECTRONIC EQUIPMENT:

Multilingual display
OBD cab socket for vehicle data extraction
GPS Terminal-EMEA

ELECTRICAL EQUIPMENT

Battery capacity: 2×165 Ah
Maintenance-free batteries
Manual battery isolation
Electrical circuit enters standby
Protection on rear lights and head lights

CHASSIS

Twin cartridge air filtration for dusty environments
Aluminum air tank
Exhaust post-processor
AdBlue tank
400L aluminum fuel tank

BUMPER - STEPS AND LIGHTING

Steel bumpers
Access to driving position by 4 steps. 1st step flexible and of composite material.
Step lighting
Metallic door sills
Lighting to EEC standards.
Provision for lighting rail on front end
Front fog lights.
2 rotating orange LED lights

SUSPENSION

Front suspension

8/8-leaf reinforced front leaf
springs No Front stabiliser bar.

Rear suspension:

12-leaf reinforced elliptic suspension
No Rear stabiliser bar.

STANDARD EQUIPMENT

Towing Hook Pin
Towing Hook
Jack 20t
Warning triangle.
Velcro reflective vest
Rubber Wheel Chock
Crowbar Cum Jack Rocker Arm
Sleeve of Vehicle Wheel and Lifting
Wrench
Fire extinguisher