
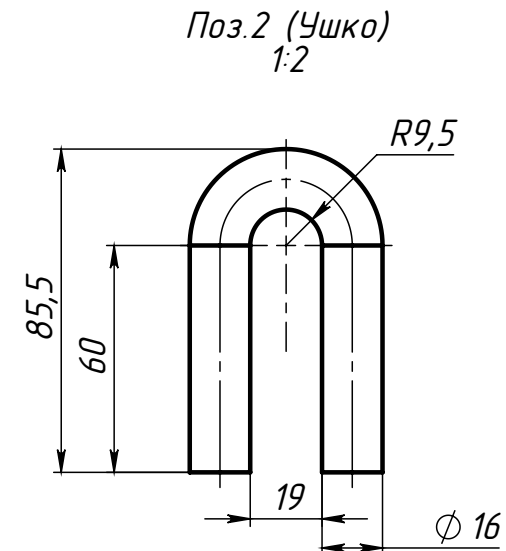
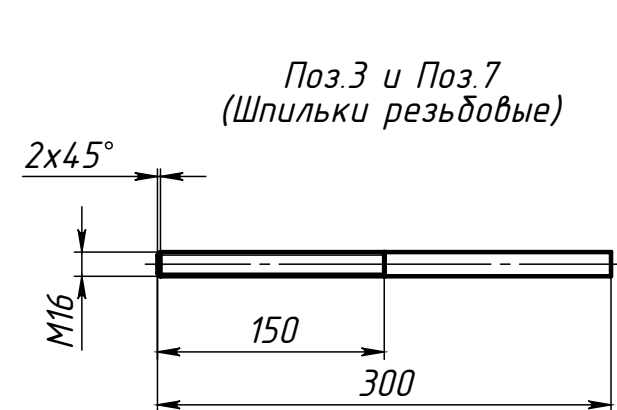
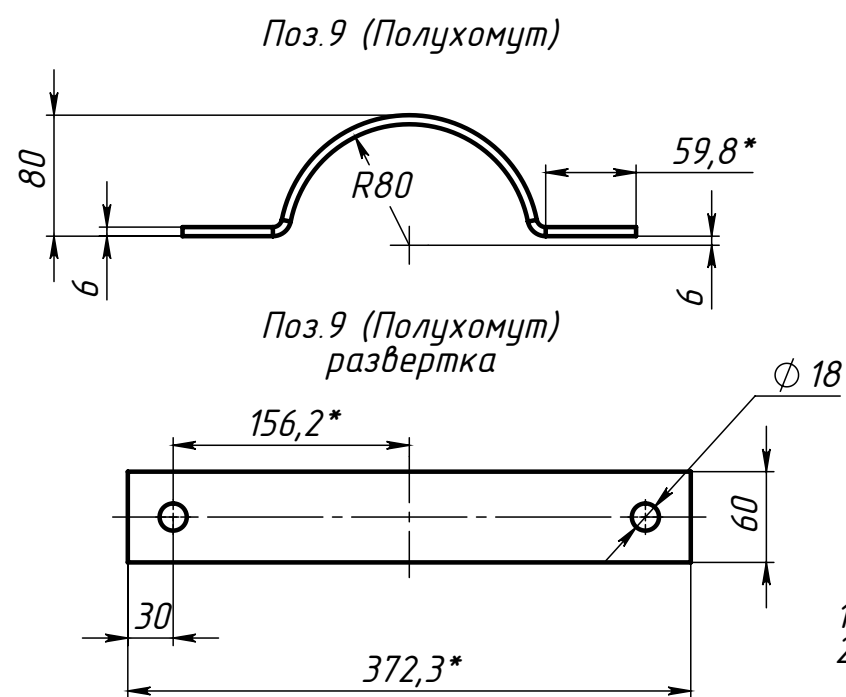


Справ. №		Подп. и дата		Инв. № дубл.		Взам. инв. №		Подп. и дата		Инв. № подл.	

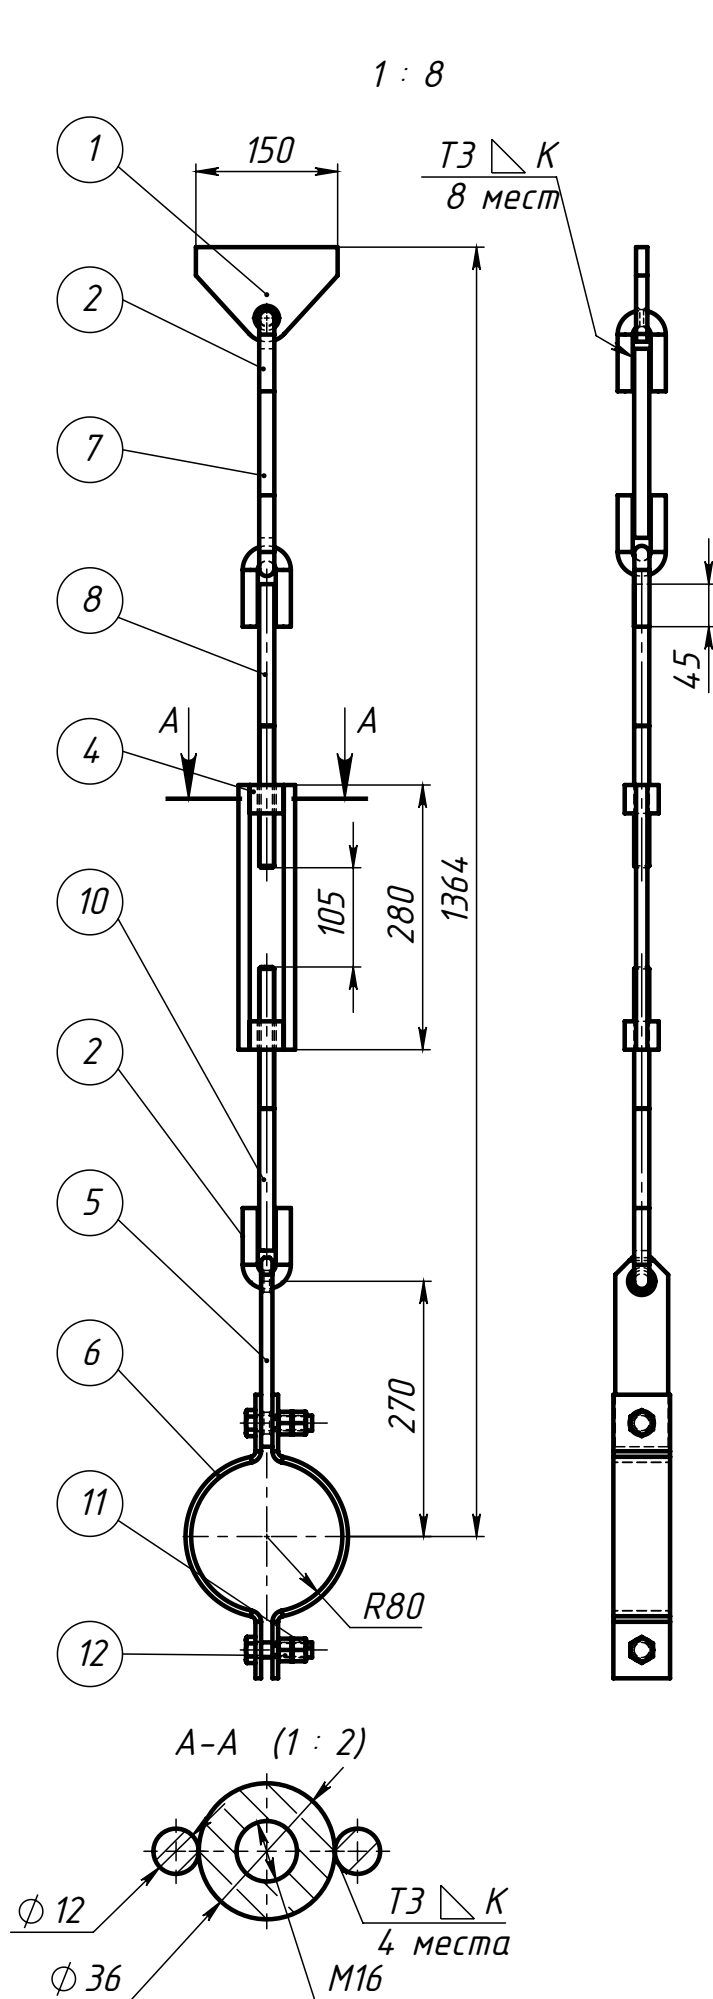

1. *Размеры для справок.
2. Размер К - по наименьшей толщине металла свариваемых деталей.
3. H12; h12 $\pm$ 1 T/2.

Поз.	Обозначение	Наименование	Вес	К-во
1	150x100x12	Проушина	0.96	1
2	φ16x175	Ушко	0.28	4
3	φ36x30, М16	Гайка	0.19	1
4	φ36x30, М16	Гайка левая	0.19	1
5	200x56x12	Серьга	0.94	1
6	373x60x6	Полухомут	1.03	2
7	φ16x200	Тяга гладкая	0.32	1
8	М16x300	Шпилька левая	0.48	1
9	φ12x280	Пруток	0.25	2
10	М16x300	Шпилька	0.48	1
11		Болт М16х60 ГОСТ 7798-70	0.1329	2
12		Гайка М16 ГОСТ 5915-70	0.034	4
		159 ТС-677.00.000-17 серия 5.903-13 в.6-95		
Изм.	Лист	№ докум.	Подп.	Дата
Разраб.				
Пров.				
Т. контр.				
Н. контр.				
Утв.				
		Подвеска жесткая горизонтальных трубопроводов		
		09Г2С ГОСТ 4543-71		