

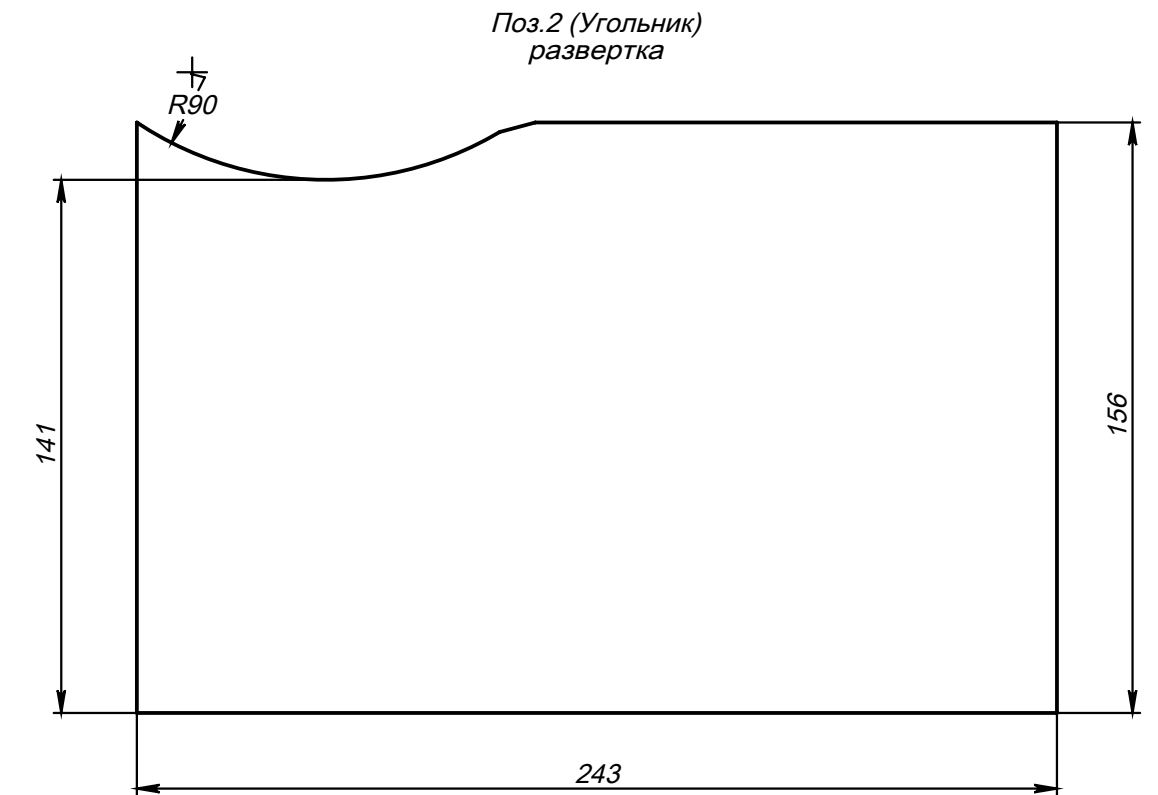
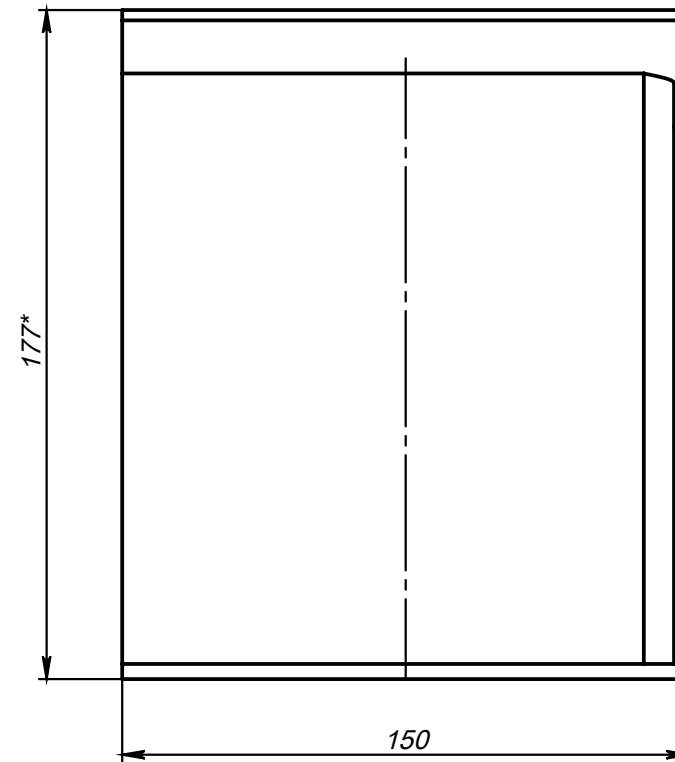



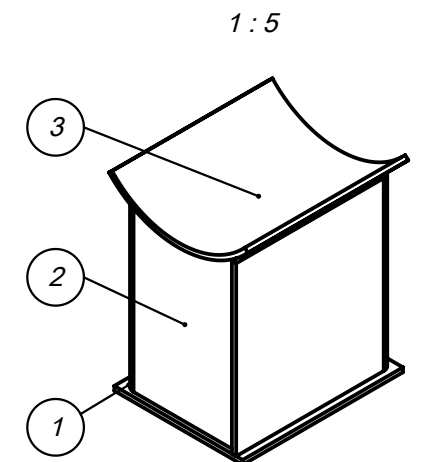

A diagram of a curved beam. The beam is represented by a thick black line. It starts at a vertical support on the left and curves upwards and to the right. A dimension line with arrows at both ends indicates a horizontal span of 130. A dimension line with arrows at both ends indicates a radius of 85, measured from the center of curvature to the inner surface of the beam.

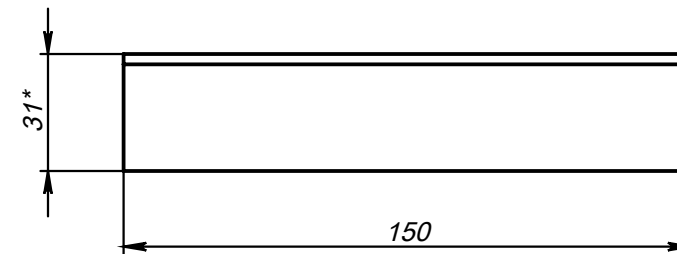

Поз.		Обозначение			Наименование	Вес			К-во			
1		150x120x4			Основание	0.57			1			
2		243x156x4			Угольник	1.17			2			
3		150x145x4			Ложемент	0.68			1			
					168-У-29 по типу ОСТ 34-10-616-93							
Изм.	Лист	№ докум.		Подп.	Дата	Опора приварная скользящая и неподвижная			Лит.	Масса	Масштаб	
Разраб.											3.58	1:2
Пров.												
Т. контр.									Лист 1		Листов 1	
						09Г2С ГОСТ 4543-71			ООО "ЗМП"			
Н. контр.												
Утв.												