
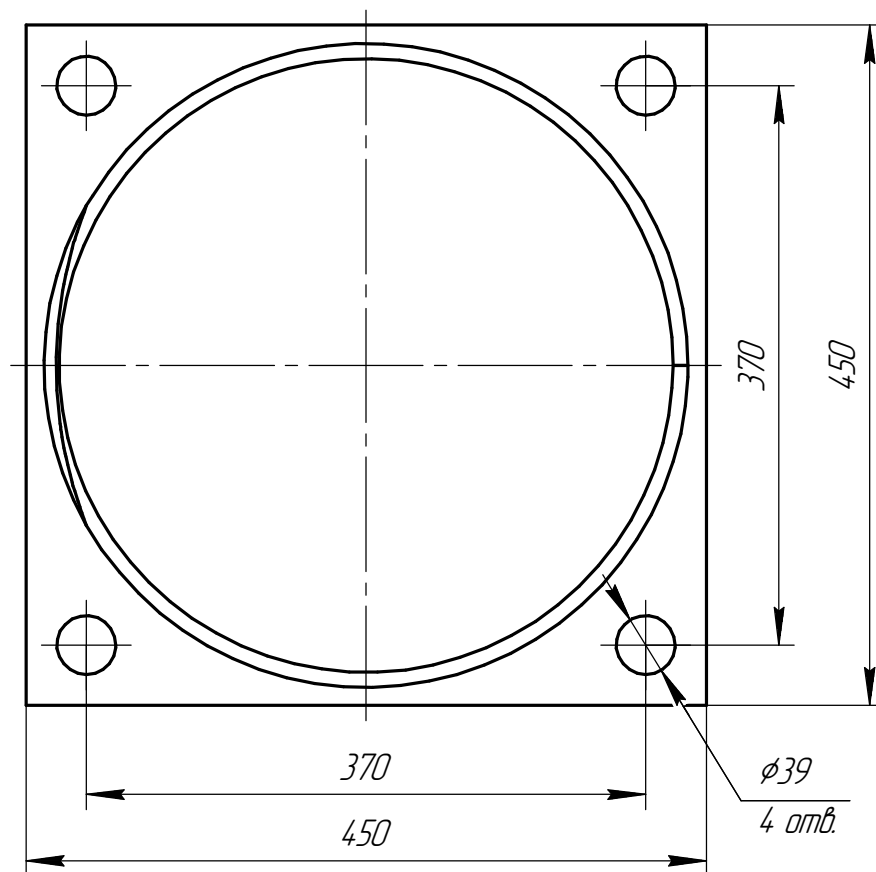
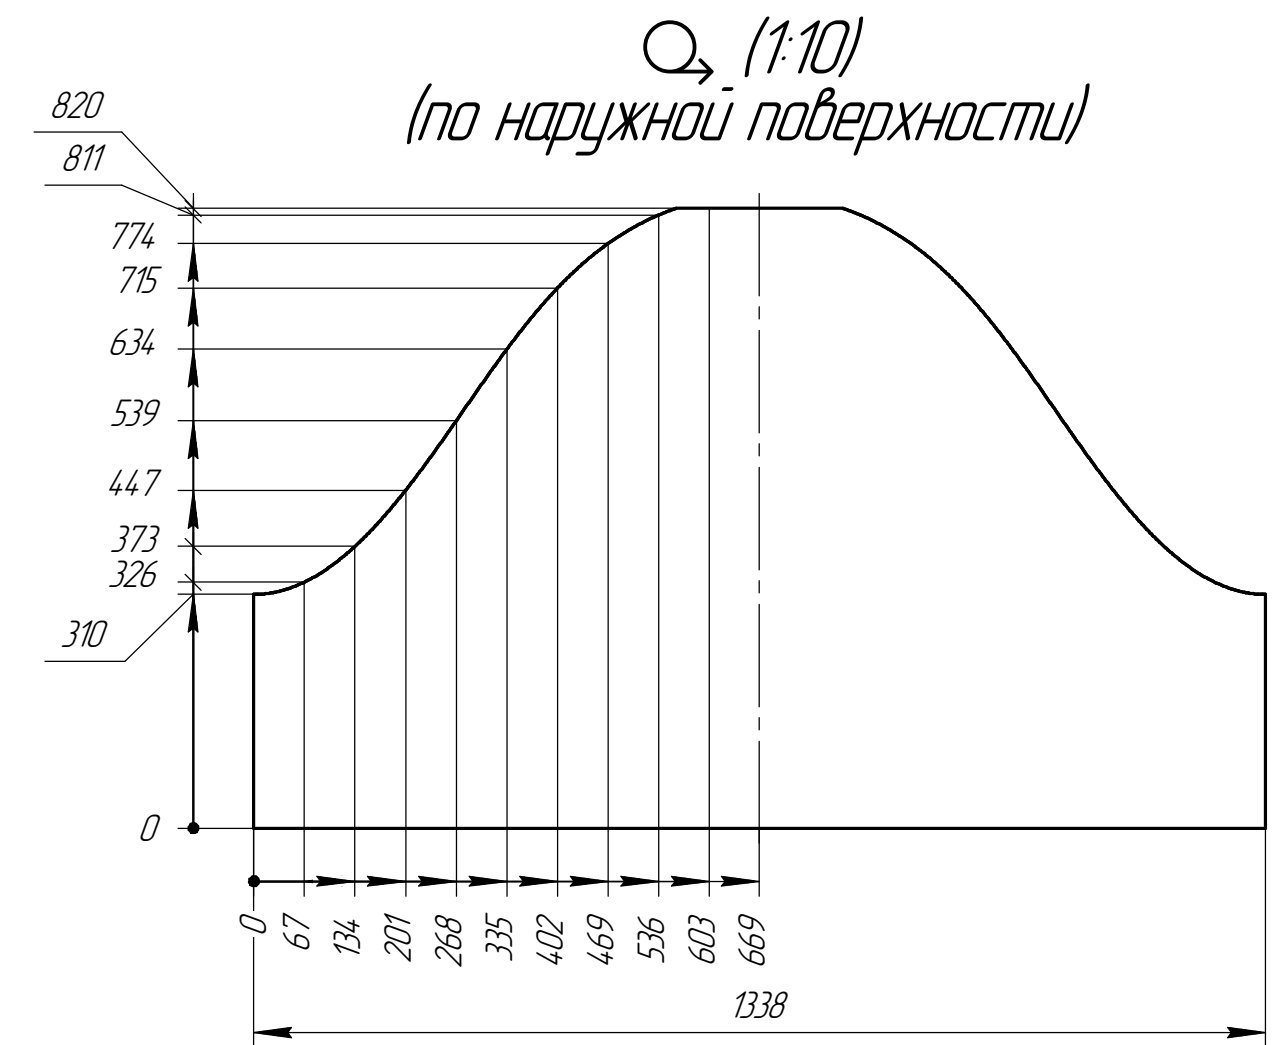


Technical drawing of a mechanical part, likely a flange or bracket, showing dimensions and a cross-section.

Dimensions:

- Total height: 84.5
- Base thickness: 25*
- Height to the start of the curve: 71
- Radius of the curve's start: 10
- Radius of the main curved surface: R94.5
- Base width: 100
- Inner diameter of the flange: $\phi 630^*$

The cross-section is labeled with 1 and 2.

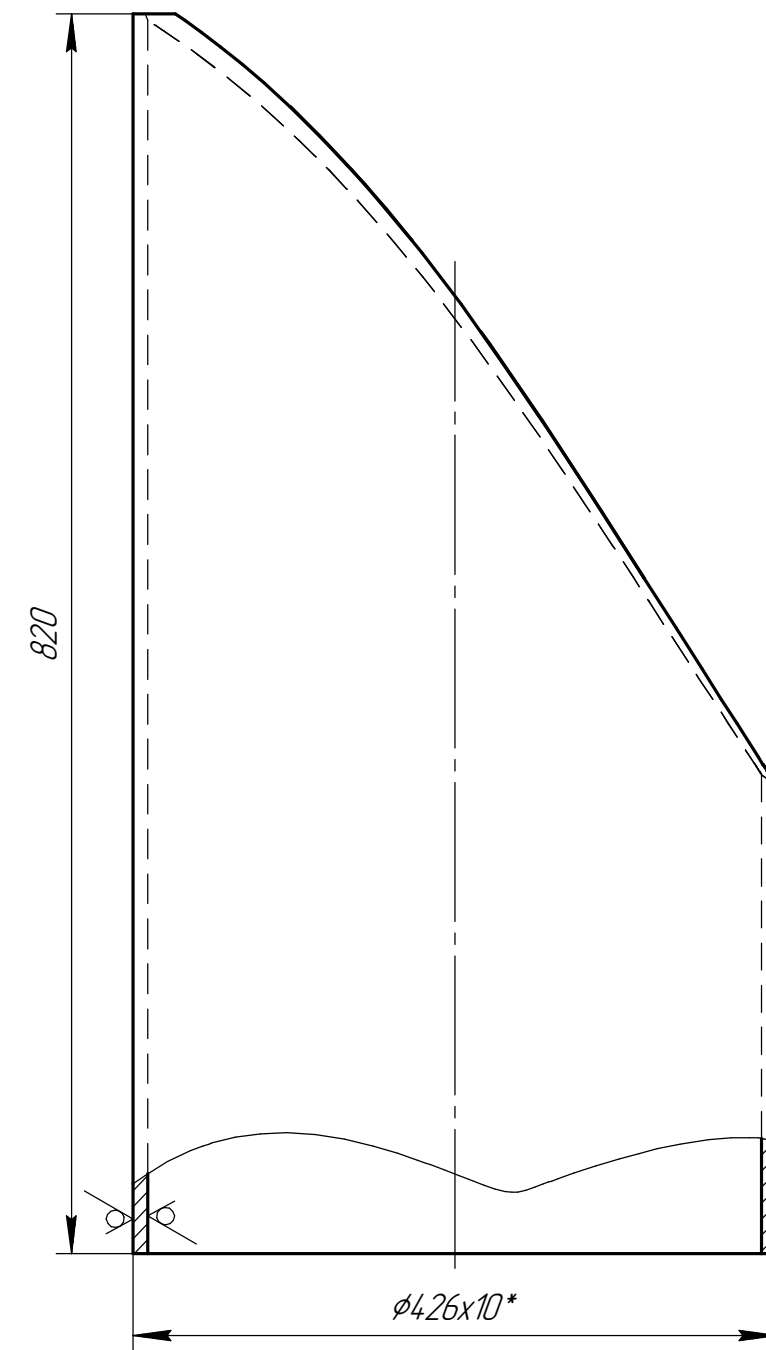

Technical drawing of a rectangular plate with four holes. The plate has overall dimensions of 450x450 mm. The holes are arranged in a 2x2 grid with a pitch of 370 mm. The hole diameter is 39 mm. A detail callout "Дет. 103. 2 (1:5)" points to one of the holes. A side view shows the plate thickness as 25 mm.

1. Общие допуски по ГОСТ 30893.1: H17, h17, ±IT17/2.
2. *Размеры для справок.
3. Материалы:
 - Лист ГОСТ 19903-2015, 09Г2С ГОСТ 19281-2014;
 - Сварочная проволока Св-08Г2С ГОСТ 2246-70.
4. Сварка по ГОСТ 14 771-76.
5. Основные технические требования по ОСТ 36-94-83.
6. Площадь покрытия 2,05 м².

Поз.	Обозначение	Наименование	Кол	Прим.
1	Труба Ø426x10, L=820	Патрубок	1	6145 кг
2	450x450x25	Лист	1	38,84 кг
		630-ТО-A1		
Изм./Лист	№ докум.	Подп.	Дата	Опора трубчатая крутоизогнутых отводов
Разраб.				
Пров.				
Т.контр.				
Н.контр.				
Утв.				