
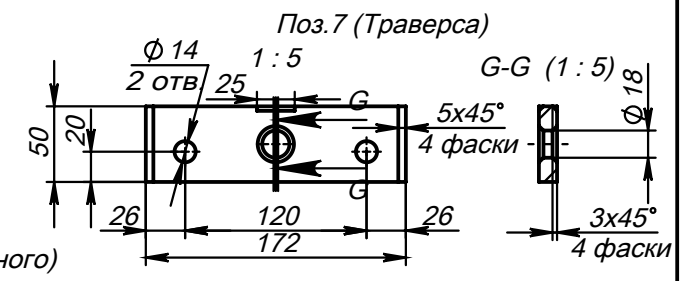
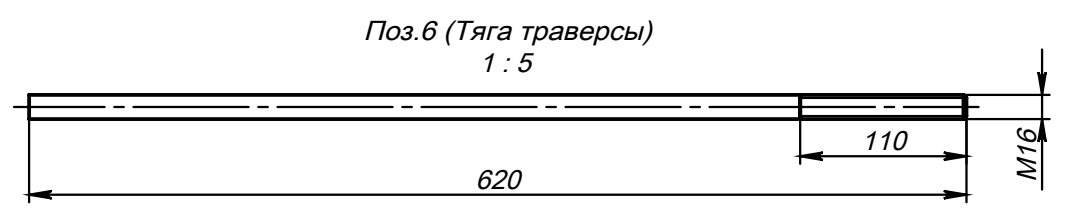
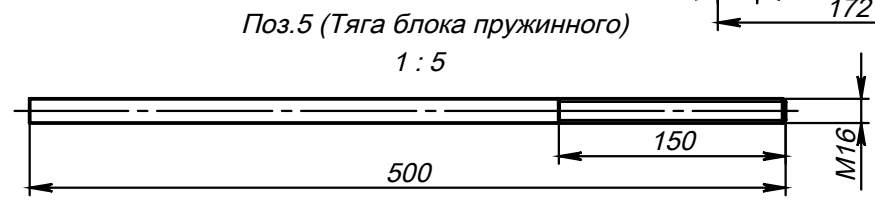
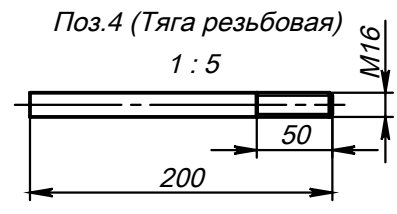


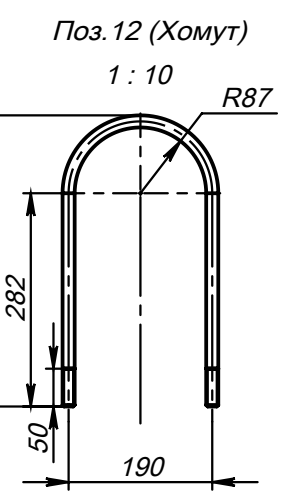


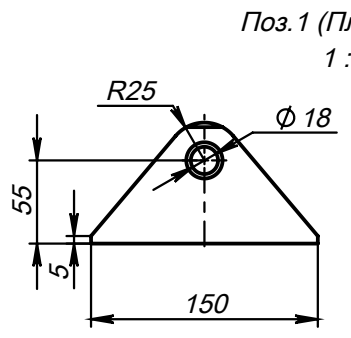
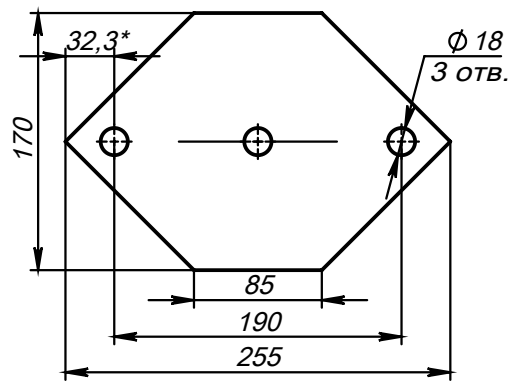
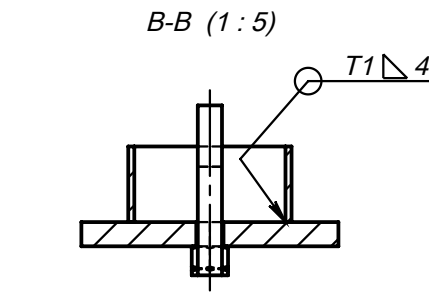
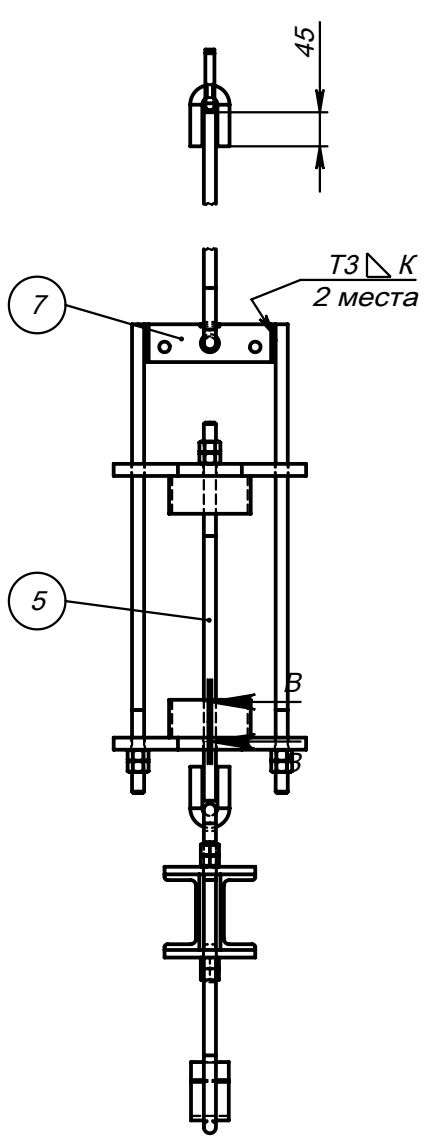

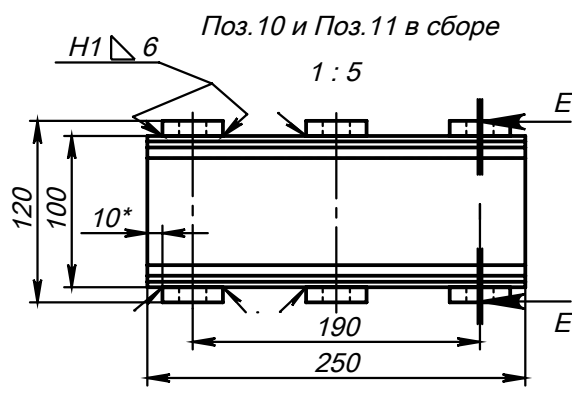


1 : 10

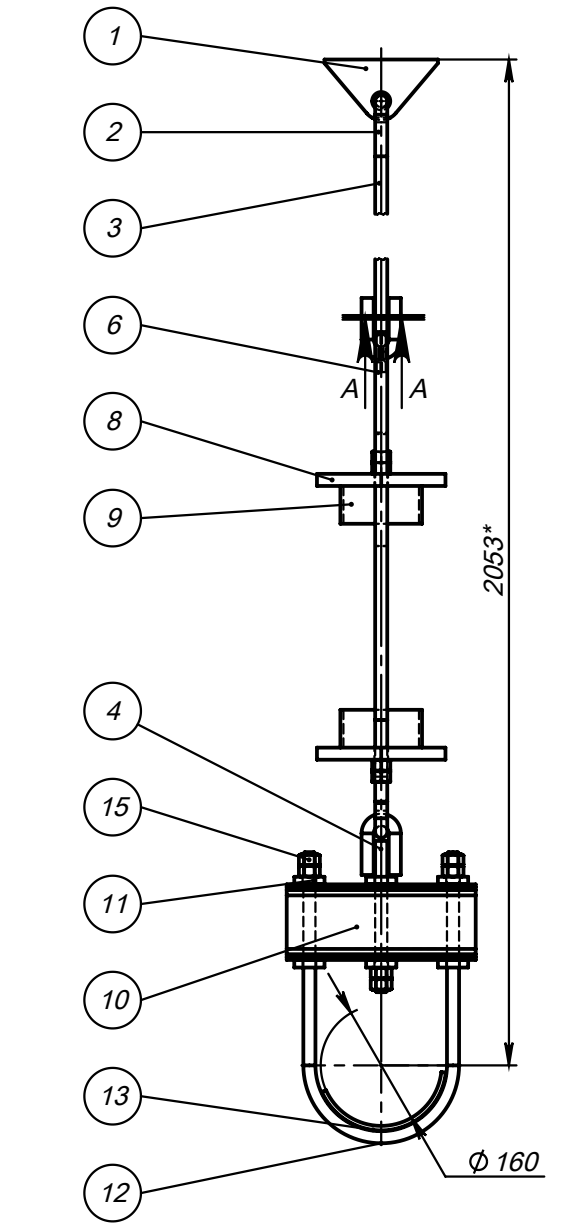

1. *Размеры для справок.
2. Размер К - по наименьшей толщине металла свариваемых деталей.
3. H12; h12; ±IT/2.

Поз.	Обозначение	Наименование	Вес	К-во
1	150x80x12	Плавник	0.65	1
2	ф16x167	Ушко	0.26	4
3	ф16x1000	Тяга гладкая	1.59	1
4	M16x200	Тяга резьбовая	0.32	1
5	M16x500	Тяга блока пружинного	0.79	1
6	M16x620	Тяга траверсы	0.98	2
7	172x50x12	Траверса	0.74	1
8	255x170x16	Основание	3.55	2
9	L=50	Труба 108x4 ГОСТ 8732-70	0.52	2
10	L=250	Швеллер 10 ГОСТ 8240-97	2.16	2
11	120x40x10	Планка	0.36	6
12	M16x861	Хомут	1.37	1
13	217x50x6	Накладка	0.51	1
14	17 ОСТ 108.764.01-80	Пружина	10.37	1
15		Гайка M16 ГОСТ 5915-70	0.034	12

					159-Т27.01.00.000 серия 4.903-10 в.6								
					Опора подвесная пружинная горизонтальных трубопроводов				Лит.		Масса	Масштаб	
Изм.	Лист	№ докум.	Подп.	Дата								34.38	1:20
Разраб.													
Пров.													
Т. контр.													
					Лист 1				Листов 1				
					09Г2С ГОСТ 4543-71				ООО "ЗМП"				
Н. контр.													
Утв.													