

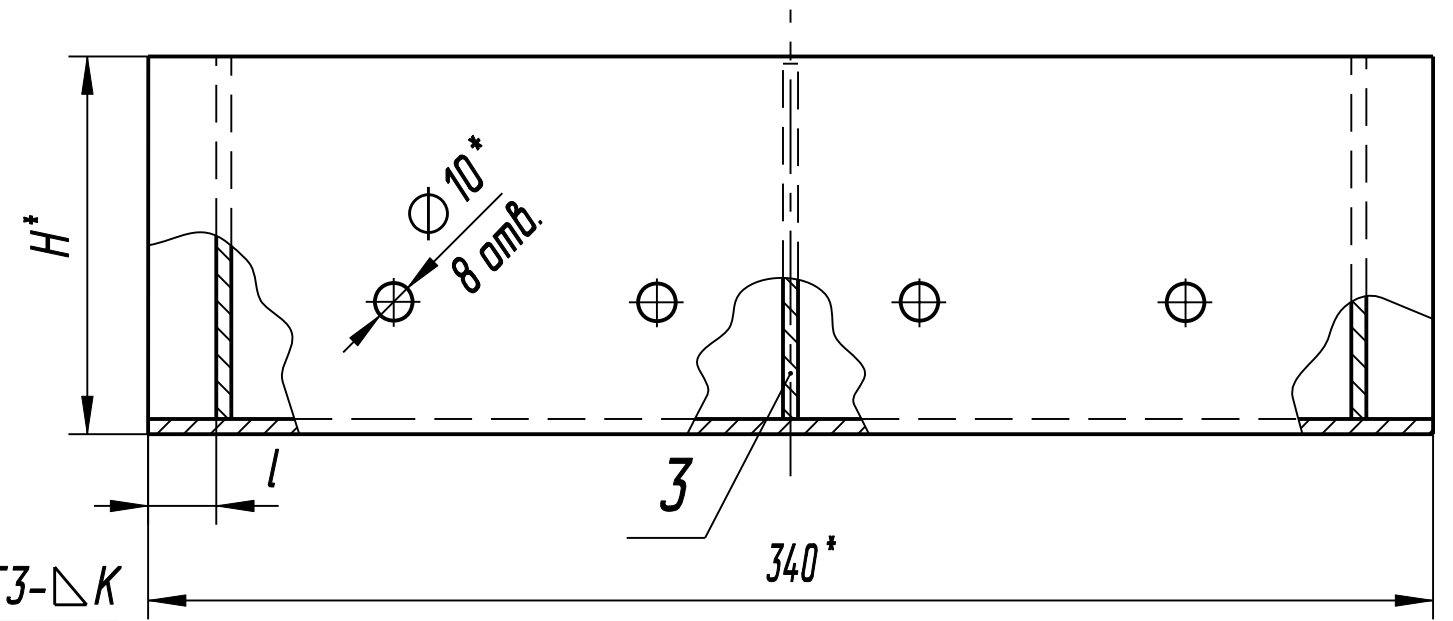
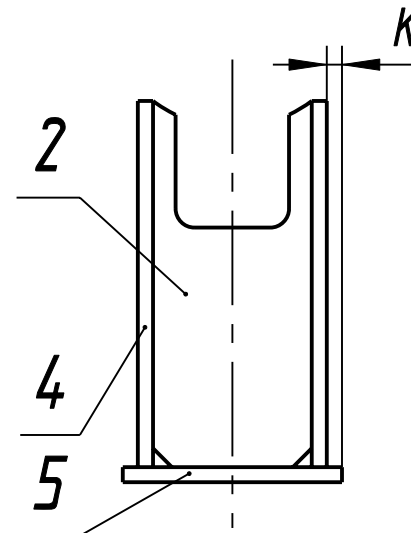


Обозначение	Размеры, мм					Масса, кг не более			
	H*	a*	B*	K	l				
ТПР.04.01(1).01.000	101	30	50	4 ^{+10 -0,5}	20	2,87			
-01	151					4,15			
-02	99					2,81			
-03	149					4,11			
-04	98					2,78			
-05	148					4,09			
-06	107	45	90		6 ^{+2,0 -1,0}	25	3,78		
-07	157						5,07		
-08	104						3,61		
-09	154						5,08		
-10	102						3,55		
-11	152						5,04		
-12	138			60		200	8 ^{+2,0 -1,0}	30	6,62
-13	188								8,65
-14	124								9,19
-15	174								12,19
-16	118	8,77							
-17	168	11,75							
-18	114	8,62							
-19	164	11,60							
-20	110	10,99							
-21	160	14,93							
-22	127	300	400	35	15,72				
-23	177				20,61				
-24	120				15,33				
-25	170				20,23				
-26	141				20,48				
-27	191				36,54				

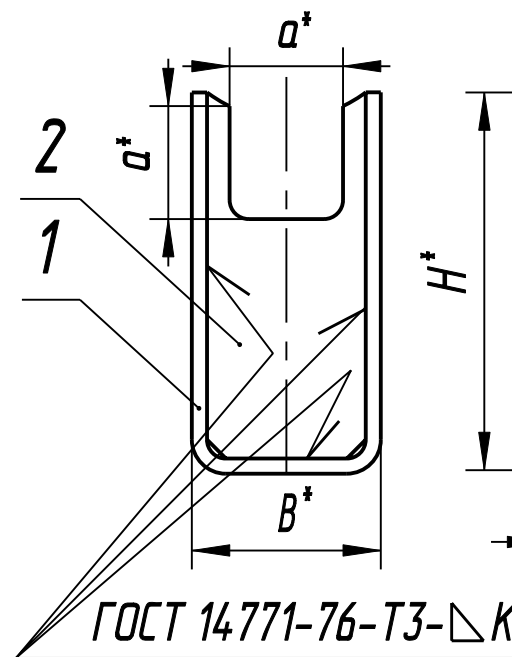

Вариант

ГОСТ 14771-76-T3-ΔK

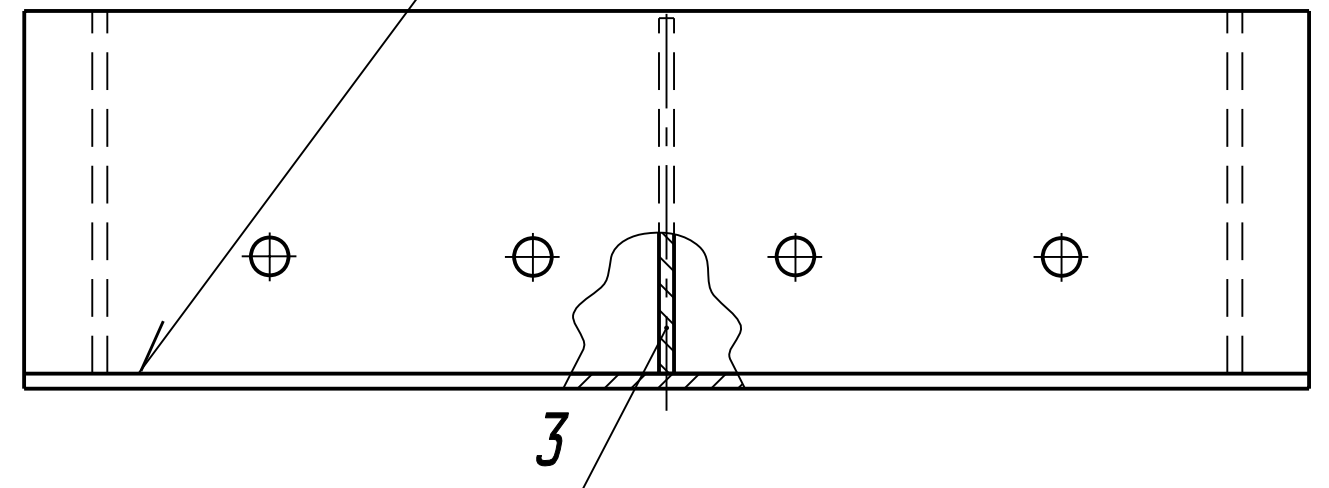

1. Сварку производить проволокой Св-08Г2С ГОСТ 2246-70.
2. * Размеры для справок.
3. ±IT16/2.

					ТПР.04.01(1).01.000СБ					
					Опора Сборочный чертеж	Лит.			Масса	Масштаб
Изм.	Лист	№ докум.	Подп.	Дата					См. табл.	—
Разраб.	Грушин			04.09						
Пров.	Воронков			04.09						
Т. контр.										
						Лист			Листов 1	
Н. контр.	Воронков			04.09		ОАО "ТИПРОТЮМЕННЕФТЕГАЗ"				
Утв.										