


Tractive System Status Indicator (TSSI)


RTML/RTDS SIGNAL
(From Tractive)
J3
Conn_01x03_Pin

BMS/IMD STATUS
(From Accumulator)
J1
Conn_01x04_Pin


Logic To Enable Green Light

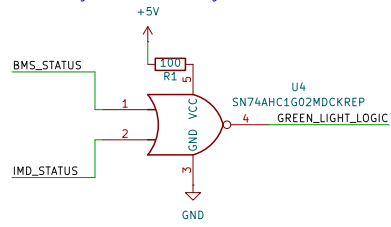



Ready-To-Move-Light Connector (Forward Facing)



Red/Green Led Array (Forward Facing)


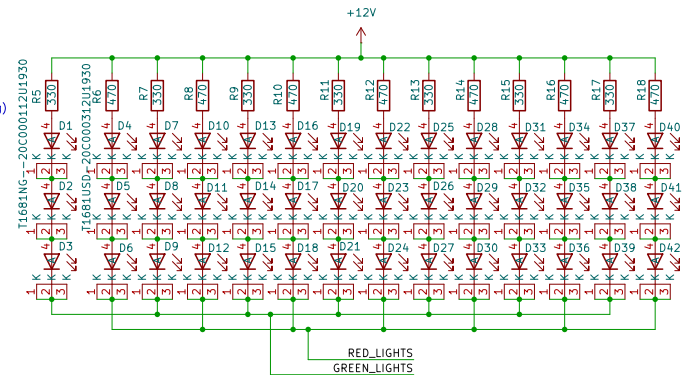


Ready-To-Move-Light Connector (Rear Facing)




Switch 12V to Ready-To-Move-Light


Logic To Enable Red Light

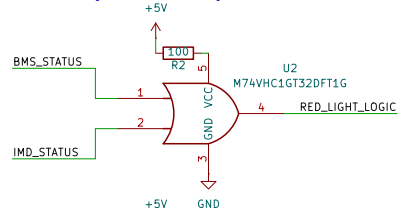


Switch 12V to Buzzer



Switch 5V to Enable 555





Switch 12V Flashing to Red LEDs

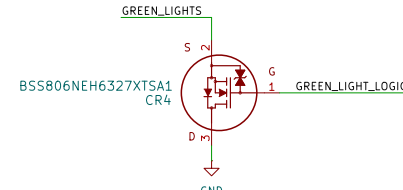


Switch 12V to Green LEDs


Red/Green Led Array (Rear Facing)

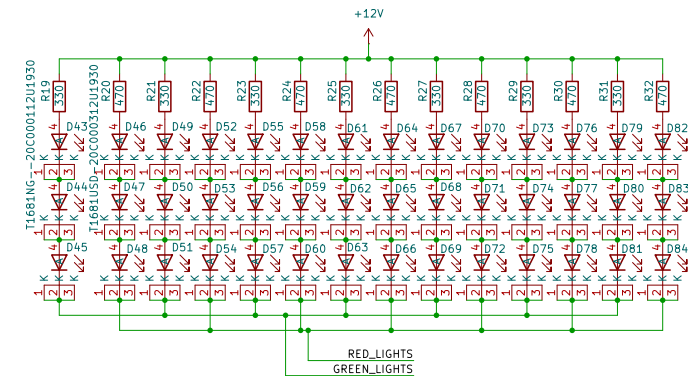

555 Astable Timer ~3Hz



+12V to +5V Linear Regulator



Ready To Drive Buzzer