# **SERIES TL 1100 SWITCHES**

### TACT SWITCHES - 12mm x 12mm



Contact Rating:	50mA @ 12 VDC
Life Expectancy:	100,000 cycles
Contact Resistance:	100m $\Omega$ max., typical @ 2-4 VDC 100mA for both silver and gold plated contacts
Insulation Resistance:	100MΩ min.
Dielectric Strength:	250VAC
Actuation Force:	160± 50 gf, 260± 50 gf
Operating Temperature:	-20°C to 70°C
Travel:	0.3 Typ.

#### **FEATURES & BENEFITS**


- ► Reliable dome contact technology
- ► Strong tactile/audible feedback
- ► Multiple operating force options


#### APPLICATIONS/MARKETS

- ► Telecommunications
- ► Consumer Electronics
- ► Audio/visual
- ► Medical
- ► Testing/instrumentation
- ► Computer/servers/peripherals

#### **HOW TO ORDER** ACTUATOR OPERATING FORCE SERIES MODEL NO. TL TL 1100 See Cap Options (None)\* = 3.3 mm □ F160 Q = Silver A = 3.8mm F260 R = Gold \*Caps available for $B = 4.554 \, \text{mm}$ these options only D = 4.3 mmE = 7.5 mmF = 12mm**Right Angle Options** C\*= 6.45mm G = 11.2 mm**Example Ordering Number** ☐ - Square Snap-on Actuator Head TL-1100-C-F260-Q-TAK-GRY "L" Dimension is 7.5mm

#### TL 1100

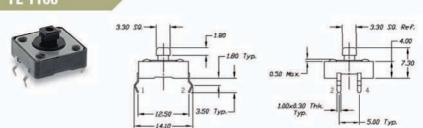



Fax: 763-531-8235


Specifications subject to change without notice.




30

Phone: 800-867-2717


TL 1100 A

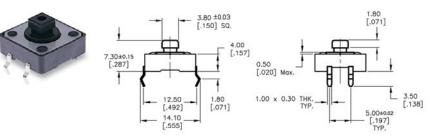














#### TL 1100 B & D









B = 4.55 mmD = 4.3 mm



### TL 1100 E









## **SERIES TL1100 SWITCHES**


TACT SWITCHES - 12mm x 12mm

### TL 1100 F












### TL 1100 G









32

Phone: 800-867-2717

### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

#### E-Switch:

TL1100CF160Q TL1100GF160Q TL1100DF160Q TL1100FF160Q TL1100FF160Q TL1100BF160Q

TL1100F160Q6JBLK TL1100F260Q TL1100DF160R TL1100F160Q TL1100TF260Q TL1100TF260R

TL1100EF160QSSDOME TL1100EF260Q TL1100F260Q4JWHT TL1100AF160Q TL1100AF260Q TL1100BF260Q

TL1100CF160Q.08BLK TL1100CF160Q.08RED TL1100CF160Q.09BLU TL1100CF160Q.09GRY

TL1100CF160Q4JBLK TL1100CF160Q4JGRY TL1100CF160Q5JGRY TL1100CF160Q6JBLK

TL1100CF260Q.08RED TL1100DF260Q TL1100F160Q4JBLK TL1100F160Q4JWHT TL1100F160Q5JBLK

TL1100F160Q6JGRY TL1100F160Q6JRED TL1100F260Q4JBLK TL1100F260Q4JGRY TL1100F260Q5JBLK

TL1100F160Q320.09BLK TL1100EF160R TL1100FF260Q TL1100FF260Q TL1100FF160R TL1100CF160Q.08BLU

TL1100F160Q320.09BLK TL1100EF160R TL1100FF260Q TL1100FF260Q TL1100FF160R TL1100CF160Q.08BLU