

# Analysis Report

**mc\_kernel(float\*, long\*, long\*, unsigned int\*, unsigned int\*, long\*, unsigned char\*, unsigned char\*, float\*, float, float, float, long, int, float\*, float\*, float\*, float\*, int, int, curandStateScrambledSobol64\*, rk\_state\*, float\*, int, float, float, float, float, float)**

Duration	83.05915 ms (83,059,147 ns)
Grid Size	[ 6,1,1 ]
Block Size	[ 256,1,1 ]
Registers/Thread	255
Shared Memory/Block	0 B
Shared Memory Executed	0 B
Shared Memory Bank Size	4 B

## [0] GeForce GTX 1080


GPU UUID	GPU-9dc490fa-4145-bed5-8209-f3348bca34a1
Compute Capability	6.1
Max. Threads per Block	1024
Max. Threads per Multiprocessor	2048
Max. Shared Memory per Block	48 KiB
Max. Shared Memory per Multiprocessor	96 KiB
Max. Registers per Block	65536
Max. Registers per Multiprocessor	65536
Max. Grid Dimensions	[ 2147483647, 65535, 65535 ]
Max. Block Dimensions	[ 1024, 1024, 64 ]
Max. Warps per Multiprocessor	64
Max. Blocks per Multiprocessor	32
Half Precision FLOP/s	69.34 GigaFLOP/s
Single Precision FLOP/s	8.876 TeraFLOP/s
Double Precision FLOP/s	277.36 GigaFLOP/s
Number of Multiprocessors	20
Multiprocessor Clock Rate	1.734 GHz
Concurrent Kernel	true
Max IPC	6
Threads per Warp	32
Global Memory Bandwidth	320.32 GB/s
Global Memory Size	7.926 GiB
Constant Memory Size	64 KiB
L2 Cache Size	2 MiB
Memcpy Engines	2
PCIe Generation	3
PCIe Link Rate	8 Gbit/s
PCIe Link Width	16

# 1. Compute, Bandwidth, or Latency Bound

The first step in analyzing an individual kernel is to determine if the performance of the kernel is bounded by computation, memory bandwidth, or instruction/memory latency. The results below indicate that the performance of kernel "mc\_kernel" is most likely limited by instruction and memory latency. You should first examine the information in the "Instruction And Memory Latency" section to determine how it is limiting performance.

## 1.1. Kernel Performance Is Bound By Instruction And Memory Latency

This kernel exhibits low compute throughput and memory bandwidth utilization relative to the peak performance of "GeForce GTX 1080". These utilization levels indicate that the performance of the kernel is most likely limited by the latency of arithmetic or memory operations. Achieved compute throughput and/or memory bandwidth below 60% of peak typically indicates latency issues.

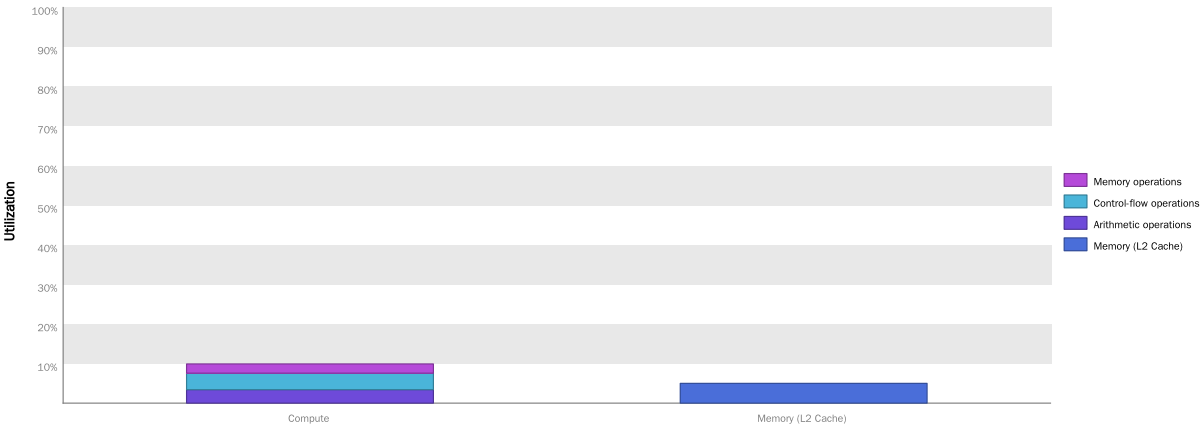


## 2. Instruction and Memory Latency

Instruction and memory latency limit the performance of a kernel when the GPU does not have enough work to keep busy. The performance of latency-limited kernels can often be improved by increasing occupancy. Occupancy is a measure of how many warps the kernel has active on the GPU, relative to the maximum number of warps supported by the GPU. Theoretical occupancy provides an upper bound while achieved occupancy indicates the kernel's actual occupancy. The results below indicate that occupancy can be improved by reducing the number of registers used by the kernel.

### 2.1. GPU Utilization Is Limited By Register Usage

The kernel uses 255 registers for each thread (65280 registers for each block). This register usage is likely preventing the kernel from fully utilizing the GPU. Device "GeForce GTX 1080" provides up to 65536 registers for each block. Because the kernel uses 65280 registers for each block each SM is limited to simultaneously executing 1 block (8 warps). Chart "Varying Register Count" below shows how changing register usage will change the number of blocks that can execute on each SM.


*Optimization: Use the `-maxrregcount` flag or the `__launch_bounds__` qualifier to decrease the number of registers used by each thread. This will increase the number of blocks that can execute on each SM. On devices with Compute Capability 5.2 turning global cache off can increase the occupancy limited by register usage.*

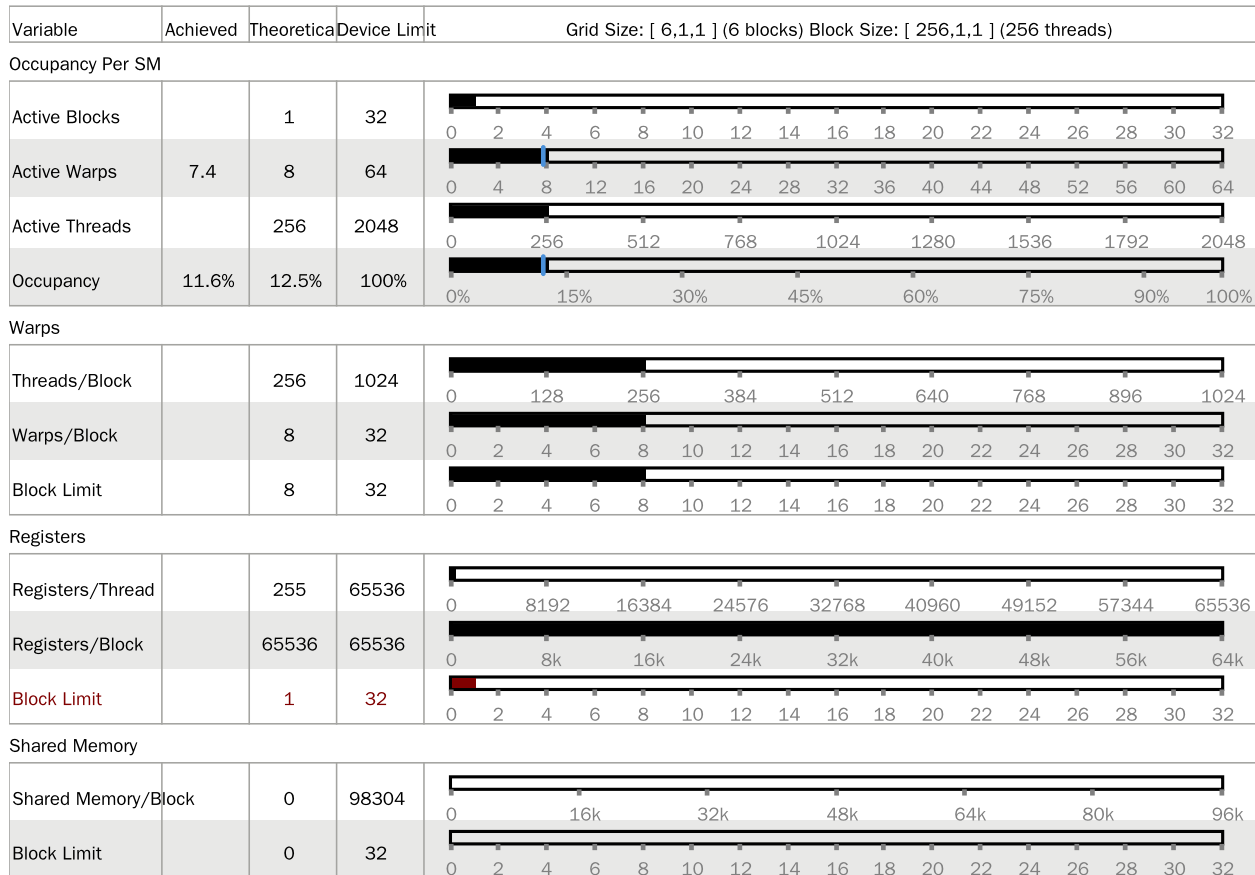


### 2.2. Occupancy Charts


The following charts show how varying different components of the kernel will impact theoretical occupancy.

Varying Block Size

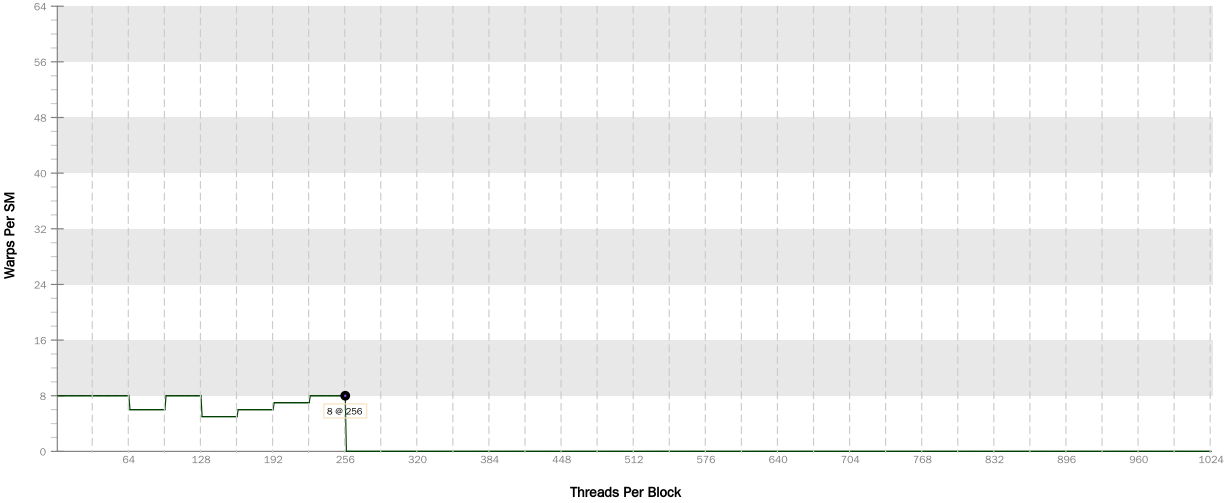


Varying Register Count

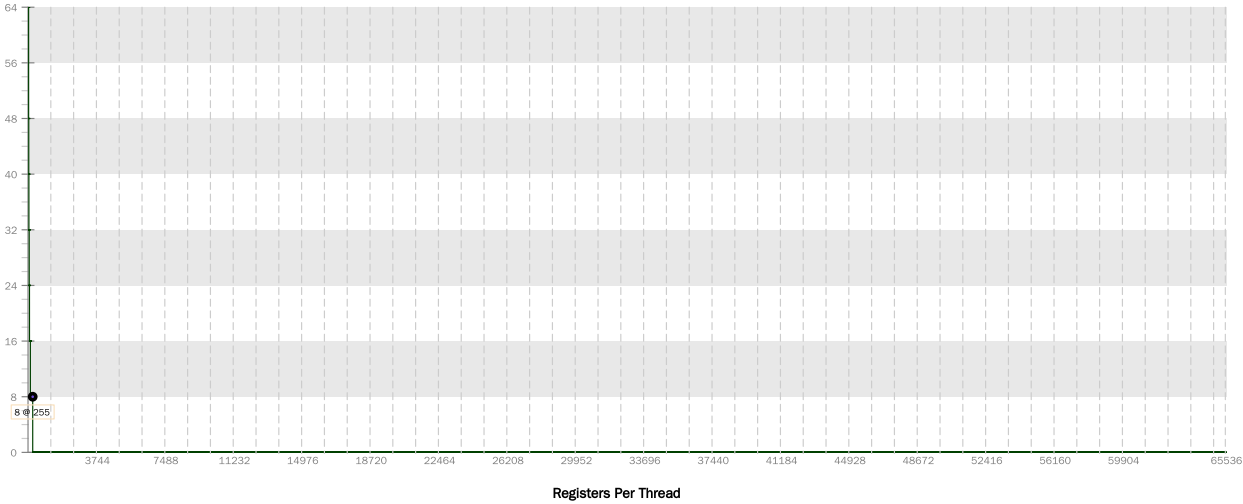

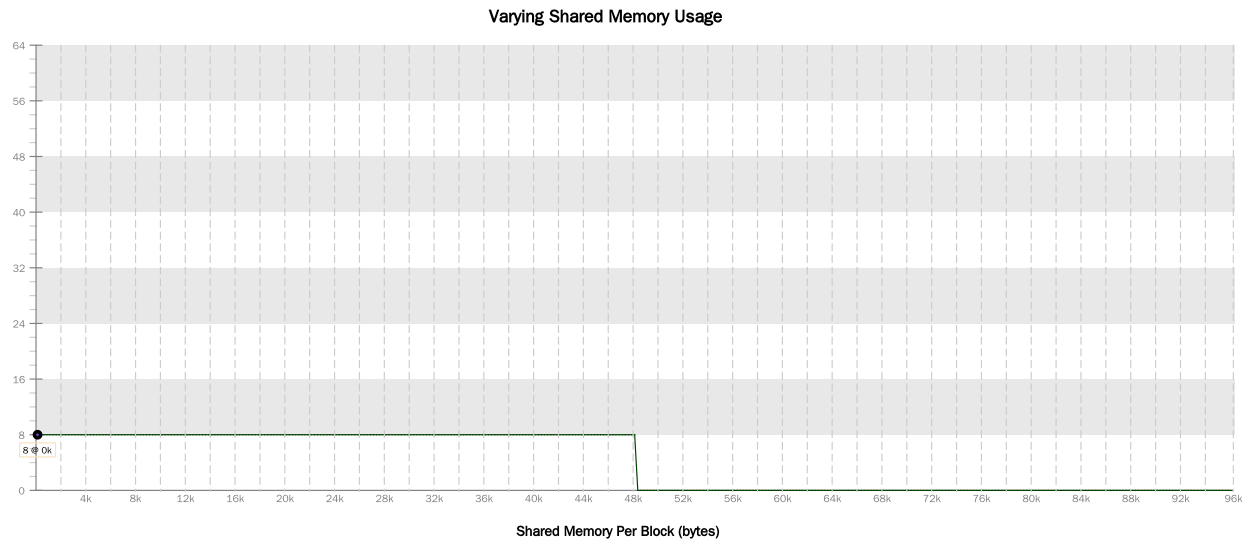

### 2.3. Multiprocessor Utilization

The kernel's blocks are distributed across the GPU's multiprocessors for execution. Depending on the number of blocks and the execution duration of each block some multiprocessors may be more highly utilized than others during execution of the kernel. The following chart shows the utilization of each multiprocessor during execution of the kernel.

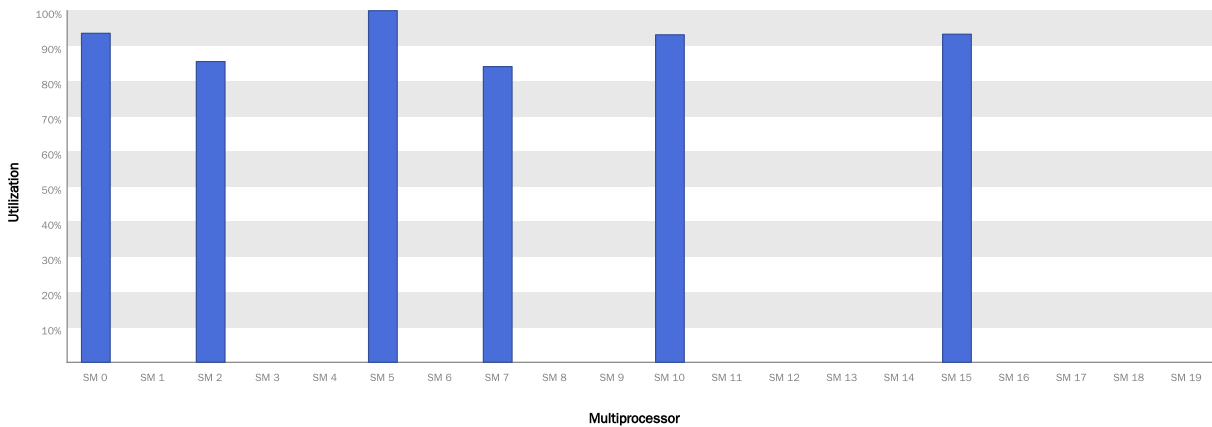

### 3. Compute Resources

GPU compute resources limit the performance of a kernel when those resources are insufficient or poorly utilized. Compute resources are used most efficiently when all threads in a warp have the same branching and predication behavior. The results below indicate that a significant fraction of the available compute performance is being wasted because branch and predication behavior is differing for threads within a warp.

#### 3.1. Low Warp Execution Efficiency

Warp execution efficiency is the average percentage of active threads in each executed warp. Increasing warp execution efficiency will increase utilization of the GPU's compute resources. The warp execution efficiency for these kernels is 52.1% if predicated instructions are not taken into account. The kernel's not predicated off warp execution efficiency of 47.4% is less than 100% due to divergent branches and predicated instructions.

*Optimization: Reduce the amount of intra-warp divergence and predication in the kernel.*

#### 3.2. Divergent Branches


Compute resource are used most efficiently when all threads in a warp have the same branching behavior. When this does not occur the branch is said to be divergent. Divergent branches lower warp execution efficiency which leads to inefficient use of the GPU's compute resources.

*Optimization: Each entry below points to a divergent branch within the kernel. For each branch reduce the amount of intra-warp divergence.*

#### 3.3. Function Unit Utilization


Different types of instructions are executed on different function units within each SM. Performance can be limited if a function unit is over-used by the instructions executed by the kernel. The following results show that the kernel's performance is not limited by overuse of any function unit.

- Load/Store - Load and store instructions for shared and constant memory.
- Texture - Load and store instructions for local, global, and texture memory.
- Half - Half-precision floating-point arithmetic instructions.
- Single - Single-precision integer and floating-point arithmetic instructions.
- Double - Double-precision floating-point arithmetic instructions.
- Special - Special arithmetic instructions such as sin, cos, popc, etc.
- Control-Flow - Direct and indirect branches, jumps, and calls.

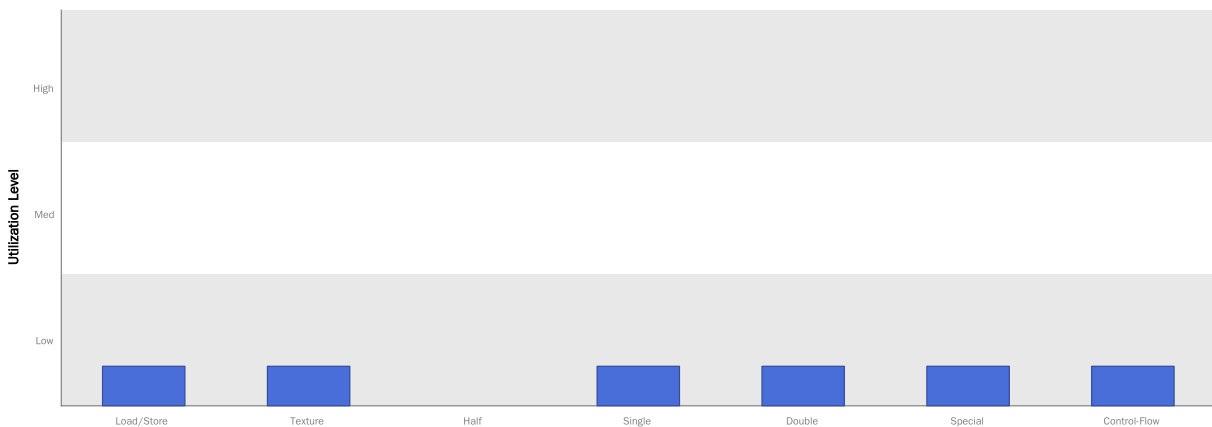


#### 3.4. Instruction Execution Counts

The following chart shows the mix of instructions executed by the kernel. The instructions are grouped into classes and for each class the chart shows the percentage of thread execution cycles that were devoted to executing instructions in that class. The "Inactive" result shows the thread executions that did not execute any instruction because the thread was predicated or inactive due to divergence.

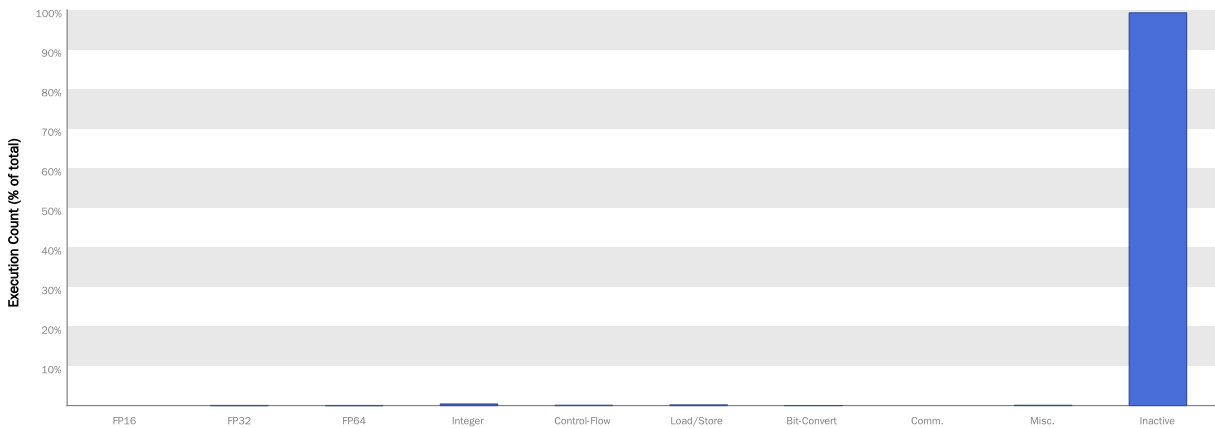

### 3.5. Floating-Point Operation Counts

The following chart shows the mix of floating-point operations executed by the kernel. The operations are grouped into classes and for each class the chart shows the percentage of thread execution cycles that were devoted to executing operations in that class. The results do not sum to 100% because non-floating-point operations executed by the kernel are not shown in this chart.

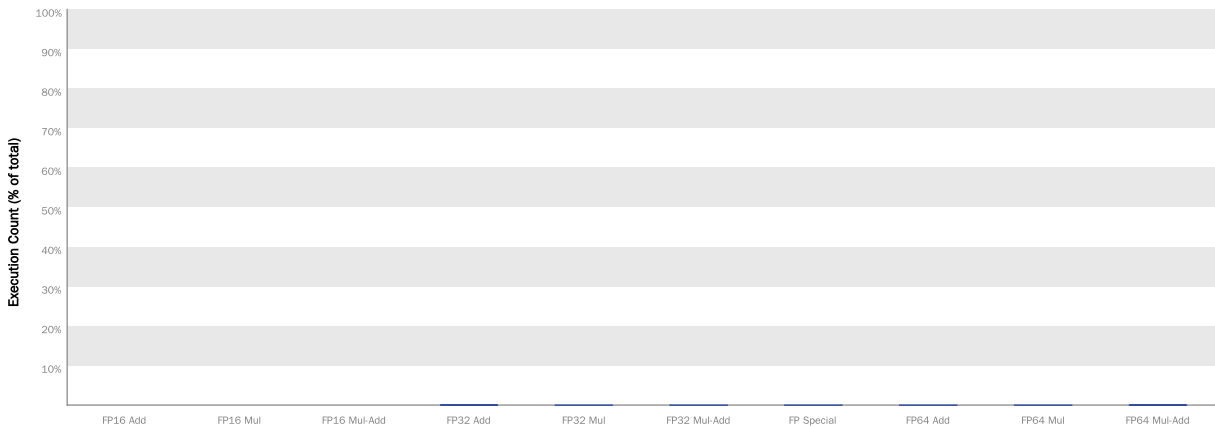

## 4. Memory Bandwidth

Memory bandwidth limits the performance of a kernel when one or more memories in the GPU cannot provide data at the rate requested by the kernel.

### 4.1. Memory Bandwidth And Utilization

The following table shows the memory bandwidth used by this kernel for the various types of memory on the device. The table also shows the utilization of each memory type relative to the maximum throughput supported by the memory.

Transactions	Bandwidth	Utilization	
Shared Memory			
Shared Loads	0	0 B/s	
Shared Stores	0	0 B/s	
Shared Total	0	0 B/s	
L2 Cache			
Reads	80117225	38.408 GB/s	
Writes	68538182	32.857 GB/s	
Total	148655407	71.266 GB/s	
Unified Cache			
Local Loads	30089626	14.425 GB/s	
Local Stores	12225659	5.861 GB/s	
Global Loads	61453854	2.717 GB/s	
Global Stores	4664205	2.236 GB/s	
Texture Reads	55848150	26.774 GB/s	
Unified Total	164281494	52.013 GB/s	
Device Memory			
Reads	2384709	1.143 GB/s	
Writes	1238554	593.767 MB/s	
Total	3623263	1.737 GB/s	
System Memory			
[ PCIe configuration: Gen3 x16, 8 Gbit/s ]			
Reads	0	0 B/s	
Writes	2041	978.462 kB/s	

### 4.2. Memory Statistics

The following chart shows a summary view of the memory hierarchy of the CUDA programming model. The green nodes in the diagram depict logical memory space whereas blue nodes depicts actual hardware unit on the chip. For the various caches the reported percentage number states the cache hit rate; that is the ratio of requests that could be served with data locally available to the cache over all requests made.

The links between the nodes in the diagram depict the data paths between the SMs to the memory spaces into the memory system. Different metrics are shown per data path. The data paths from the SMs to the memory spaces report the total number of memory instructions executed, it includes both read and write operations. The data path between memory spaces and "Unified Cache" or



"Shared Memory" reports the total amount of memory requests made (read or write). All other data paths report the total amount of transferred memory in bytes.