

Pumps365.com

Accurate purchasing search engine

Please input a keyword

Q Search

Products


Suppliers

Buyers

Post Buying Request

Hot Search: Shurflo Pressure Pumps Hydrostatic Pressure Pumps Ujala Pressure Pumps Manual Pressure Pumps

pumps365.com > Suction Pumps> Suction Pressure Pumps
Dongguan Honlite Industrial Co., Ltd. > 12V PMDC Peristaltic Pump

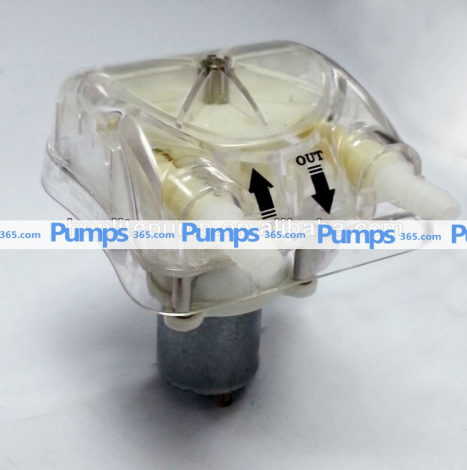

DC12V Peristaltic Pump with 850ml/min Flow Rate and 30psi output pressure

FOB Price:US 12.00

Port:DC12V Peristaltic Pump with 850ml/min Flow Rate and 30psi output pressure

Min.Order:100 Piece Get Latest Price

Supply Ability:100000

Contact Now

Product Detail

Quick Details

Place Of Origin:guangdong China (mainland)

Brand Name:honlite

Model Number:hpp-12-850-zb-2-p

Theory:peristaltic Pump

Structure:peristaltic Pump

Usage:water

Power:electric

Standard Or Nonstandard:nonstandard

Pressure:low Pressure

Type:vacuum Suction Devices

People who shopped for this item also looked at					
	AC 230V Peristaltic Pump with 250ml/min	DC24V Peristaltic Pump with 500ml/min Flow	DC24V Peristaltic Pump with 100ml/min Flow	peristaltic pump with 120ml/min Flow Rate	DC24V Peristaltic Pump with 850ml/min Flow
Price	US 10.00-20.00	US 17.00-30.00	US 17.00-30.00	Factory Price	US 12.00-19.00
Place Of Ori...	Guangdong, China (mainland)	China (mainland)	China (mainland)	China (mainland)	guangdong China (mainland)
Model Number	Hpp-120-270-t	Hppe-24-500-zb-2-p	Hppe-24-100-npt-2-t-p	Kpp	hpp-24-850-zb-2
Min Order	100	250	250	1	100
Brand Name	Honlite	Honlite	Honlite	Kamoer	honlite
Usage		Water	Water	pumping Water, Dosing Chemicals And	water
Theory		Peristaltic Pump	Peristaltic	Peristaltic Pump	peristaltic Pump
Structure		Gear Pump	Peristaltic Pump	Motor+rollers	peristaltic Pump
Standard Or...		Standard	Nonstandard	Standard	nonstandard
Power		Electric	Electric	Electric	electric


We Know Peristaltic Pumps.We provide Custom-Made service & Technical Support, 24 hours everyday We Deliver Samples within 3 days **Features**

- Precise 850ml per minute flow rate
- Honlite made DC motor with quality assurance
- High quality **PharMED® peristaltic tube** meets USP ClassVI, FDA and NSF criteria
- Preassembled food grade PP made barbed connector for 1/4" external tube
- Wide customization options

Company Details
Verified Supplier - Dongguan Honlite Industrial Co., Ltd.

[China]
Business type:Manufacturer
Address:Xinweili Village, Liuwu Village, Shijie Town, Dongguan, Guangdong, China (Mainland)
Telephone:86-769-86637398

this is part of the Suction



DC24V PMDC Peristaltic Pump with 500ml/min Flow & 40psi output pressure



DC12V Peristaltic Pump with 100ml/min Flow Rate and 40psi output pressure



DC24V Peristaltic Pump with 100ml/min Flow Rate and 40psi output pressure



Peristaltic Pump with 500ml/min Flow and 40psi output pressure

- Quick tube replacement (no tools required)
- Quiet operation
- Long maintenance free operation life
- High quality manufacturing and materials
- Cover lock for bi-directional operation
- Sleek design
- 18 month manufacturer warranty
- Snap-in or screw mount installation
- ISO 9001 supplier
- RoHS compliant
- Low cost

Ordering information

Model number system:

Type -- Voltage -- Flow -- External Connector -- Pressure Rollers
HPP ---- 12 ----- 850 ----- ZB ----- 2

Options:

- Voltage (VDC): 12V or 24V
- Flow (ml/min): 30~1100ml/min
- Samples for OEM available upon request!

Patented replaceable pump head

Pump head can be replaced within 5 seconds
The best way to prevent difficulties from tube replacement

Specifications: (Modification is possible):

Honlite Peristaltic Pump	Unit	Model Number
		HPP-12-850-ZB-2-P
Input Voltage	V	12
Flow Rate	ml/min	850 +/- 8%
(Testing with regular water)		
Number of Rollers	/	2
Maximum Output Liquid Pressure	PSI	40
Maximum Lifting Distance	M	3
Peristaltic Tubing	Inch	PharMed 5/16"(ID)
External Tube Connector	/	Barbed fitting for 1/4"(ID) tube
Operation Temperature (Environment)	°C	-10 ~ +50
Storage Temperature (Environment)	°C	-20 ~ +80
Motor Type	/	DC Brush Motor
Motor Insulation	/	Material Comply with UL Insulation Class B
Starting Current	A	2.0 Maximum
Loading Current	A	1.1 Maximum
Motor Protection	/	None
Water Proof	/	None
Expecting Life of Peristaltic Tubing	RUn Hours	800
Expecting Life of Pump	Run Hours	800
Operation Duty Cycle	/	Continuous
Loading Noise (Testing Distcance = 30CM)	dB	64 Maximum
Motor Power Wire	/	Optional
Net Weight	g	230
Pump Head Pannel Dimension	mm	87(W) x 76(L) x 37(H)
Pump Outline Dimension	mm	87(W) x 76(L) x 102(H)

Easy InstallationInstallation kit is not included For samples, pricing and further information please contact:Honlite Industrial Co., Ltd.

Not exactly what you want? Post a quick Buying Request!

Related Searches:

- High Suction Water Pumps
- Comet High Pressure Pumps
- Bertolini High Pressure Pumps
- Hpp High Pressure Pumps
- Hammelmann High Pressure
- Woma High Pressure Pumps
- Cat High Pressure Pumps
- Suction Pressure Of Pumps

You may also be interested in:

- Double Suction Centrifugal
- End Suction Centrifugal Pumps
- Suction Centrifugal Pumps
- Suction Head Pumps
- Suction Lift Pumps
- Suction Pressure Pumps
- Suction Dredge Pumps



0

Browse: [water Pump](#) | [Pump for Sale](#) | [Site Map](#)

Copyright © 2014 pumps365.com. All Rights Reserved.